



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 7230R LOADER
 Component
Diesel Engine
 Fluid
DURALENE Dura-Max 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0020478	DC0020480	DC0013455
Sample Date		Client Info		13 May 2023	23 Feb 2023	15 Feb 2022
Machine Age	hrs	Client Info		9948	19500	9630
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		500	500	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	42	39	▲ 114
Chromium	ppm	ASTM D5185m	>11	1	<1	2
Nickel	ppm	ASTM D5185m	>5	7	1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	21	2	2
Lead	ppm	ASTM D5185m	>26	0	0	▲ 27
Copper	ppm	ASTM D5185m	>26	<1	2	4
Tin	ppm	ASTM D5185m	>4	0	0	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	3	5	8
Potassium	ppm	ASTM D5185m	>20	49	25	40
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.2	18.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	18.8	36.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	● 119	● 129
Boron	ppm	ASTM D5185m		2	6	5
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		56	62	83
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		890	883	1237
Calcium	ppm	ASTM D5185m		1140	1259	1761
Phosphorus	ppm	ASTM D5185m		1026	998	1393
Zinc	ppm	ASTM D5185m		1217	1228	1828
Sulfur	ppm	ASTM D5185m		3781	3886	3136
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	13.6	42.2
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	10.4	6.5
Visc @ 100°C	cSt	ASTM D445		13.1	14.1	● 18.3

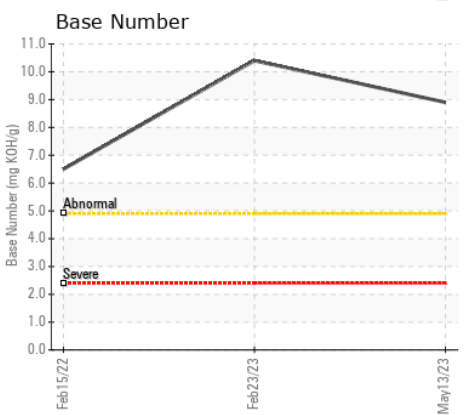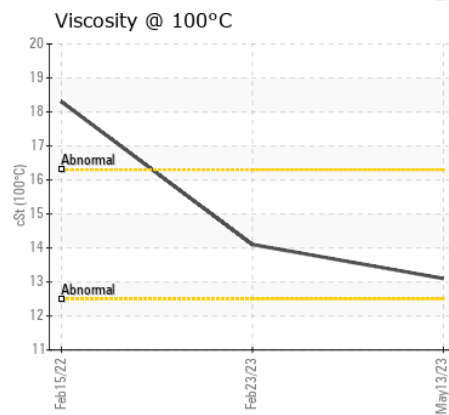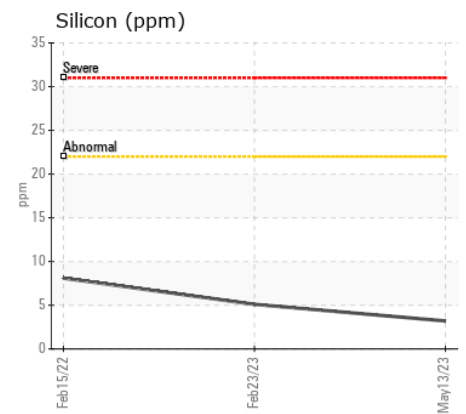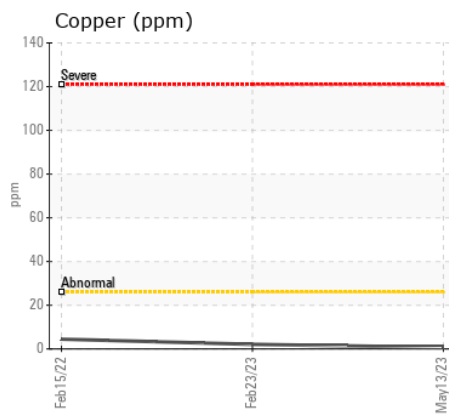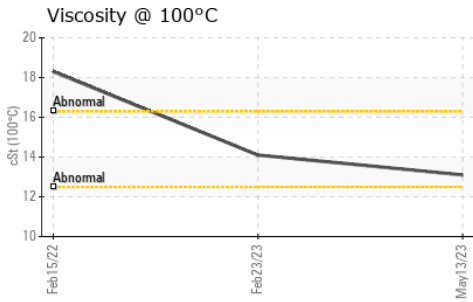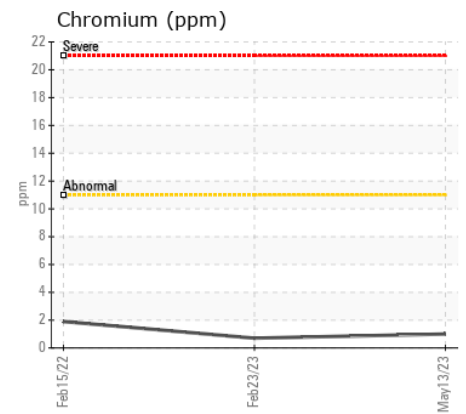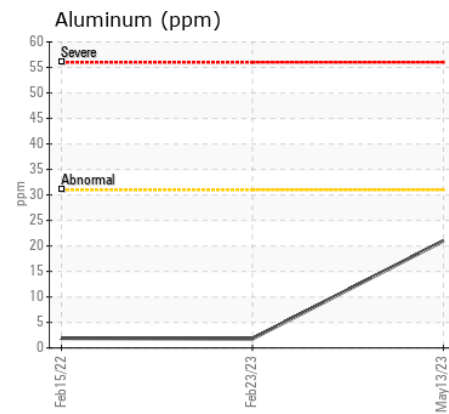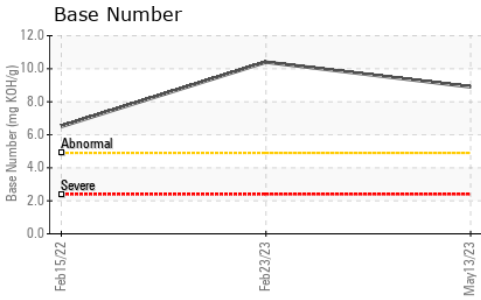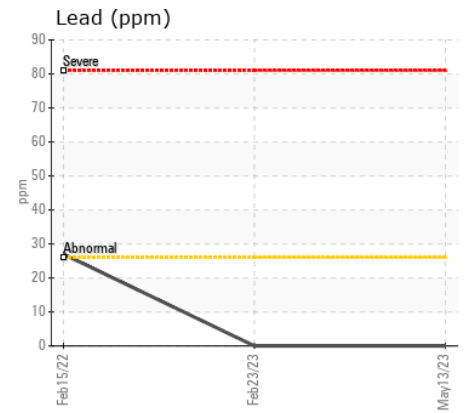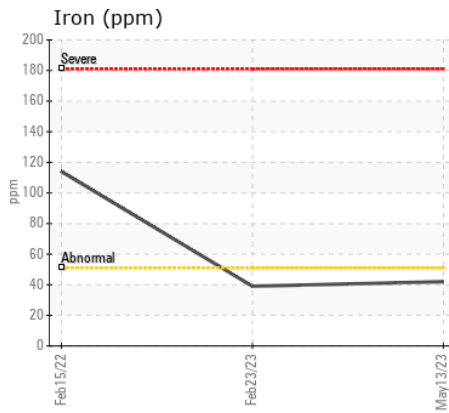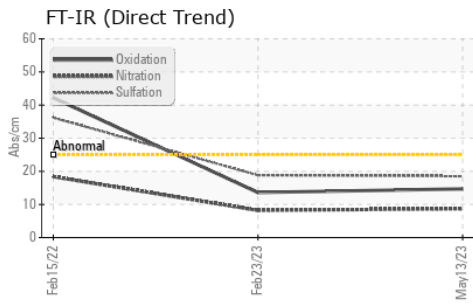

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0020478 **Received** : 04 Aug 2023
Lab Number : 05916653 **Tested** : 07 Aug 2023
Unique Number : 10588567 **Diagnosed** : 07 Aug 2023 - Doug Bogart
Test Package : MOB 1 (Additional Tests: TBN)

MERCER VU FARMS
 12275 MT PLEASANT RD
 MERCERSBURG, PA
 US 17236
 Contact: RYAN LEASURE
 ryanleasure@yahoo.com
 T: (717)404-5913
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)