



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HC2229
Component
Rear Right Planetary
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0810424	WC0720448	---
Sample Date		Client Info		29 Jul 2023	17 Nov 2022	---
Machine Age	hrs	Client Info		6455	5125	---
Oil Age	hrs	Client Info		0	717	---
Filter Age	hrs	Client Info		0	717	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	35	72	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	1	---
Aluminum	ppm	ASTM D5185m	>25	0	3	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>75	1	1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	13	14	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	SOLID	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	<1	---
Boron	ppm	ASTM D5185m	50	0	0	---
Barium	ppm	ASTM D5185m	15	0	0	---
Molybdenum	ppm	ASTM D5185m	15	0	0	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	50	2	<1	---
Calcium	ppm	ASTM D5185m	50	2	6	---
Phosphorus	ppm	ASTM D5185m	350	355	171	---
Zinc	ppm	ASTM D5185m	100	2	30	---
Sulfur	ppm	ASTM D5185m	12500	1634	342	---
Visc @ 40°C	cSt	ASTM D445	220	226	228	---

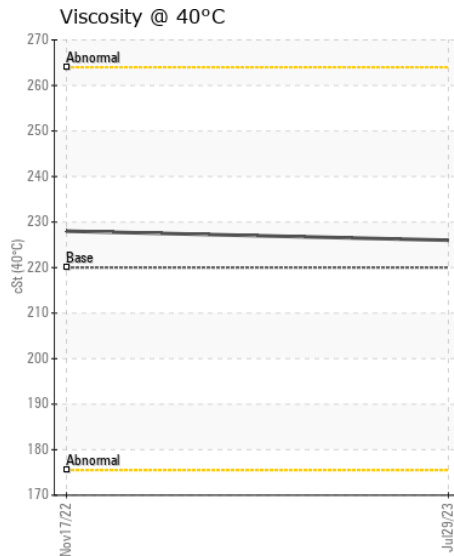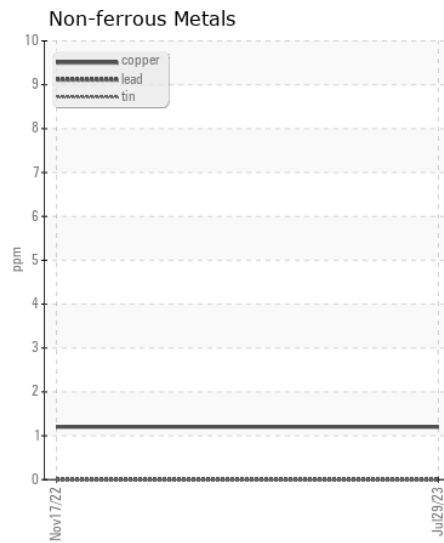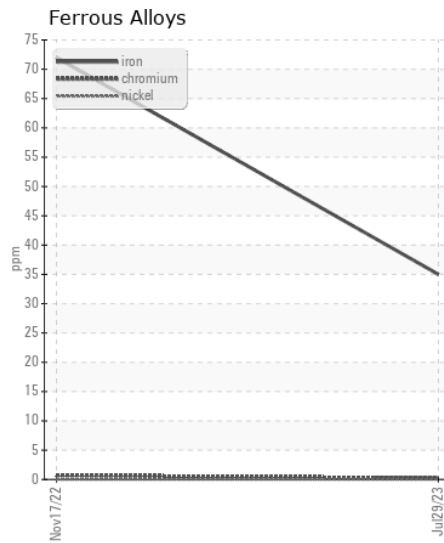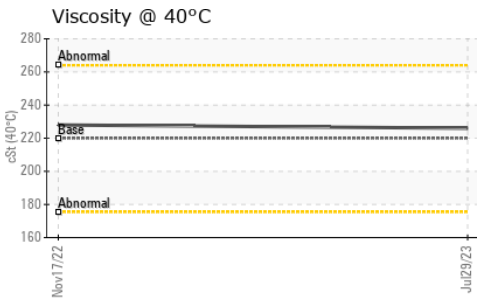

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0810424
Lab Number : 05925594
Unique Number : 10605541
Test Package : CONST

Received : 15 Aug 2023
Tested : 16 Aug 2023
Diagnosed : 17 Aug 2023 - Don Baldrige

BUCKNER HEAVY LIFT
 4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215

Contact: MICHAEL LAWSON
 michael@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)376-8888
 F: (336)376-4090