



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8035U0000A800
 Component
Diesel Engine
 Fluid
ALPHA MEGA MOLY 15W40 (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0676259	---	---
Sample Date		Client Info		07 Aug 2023	---	---
Machine Age	hrs	Client Info		27613	---	---
Oil Age	hrs	Client Info		1014	---	---
Filter Age	hrs	Client Info		1014	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	60	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	11	---	---
Lead	ppm	ASTM D5185m	>40	23	---	---
Copper	ppm	ASTM D5185m	>330	3	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	15.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	46.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		194	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		18	---	---
Calcium	ppm	ASTM D5185m		4579	---	---
Phosphorus	ppm	ASTM D5185m		1169	---	---
Zinc	ppm	ASTM D5185m		1322	---	---
Sulfur	ppm	ASTM D5185m		5138	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	48.6	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.77	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.91	---	---
Visc @ 100°C	cSt	ASTM D445		15.8	---	---

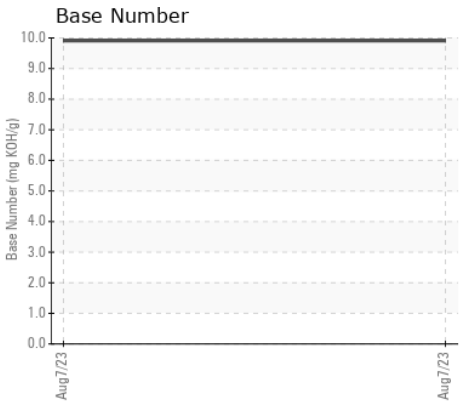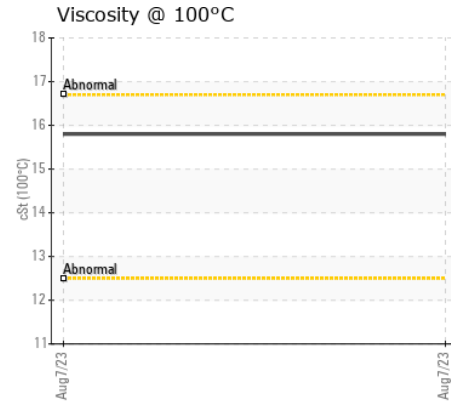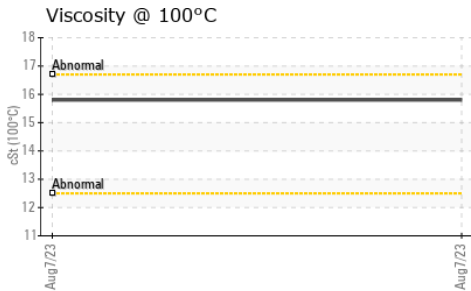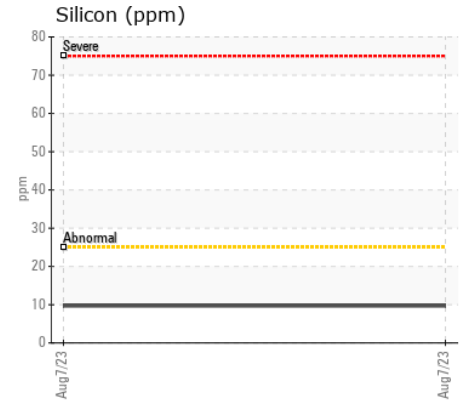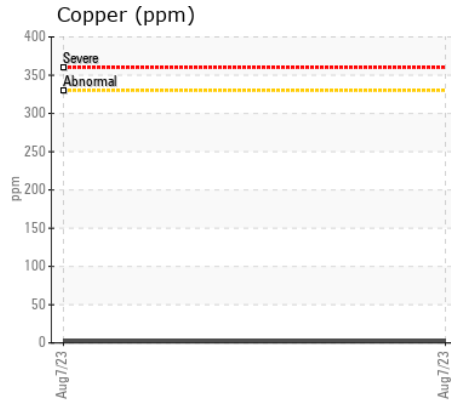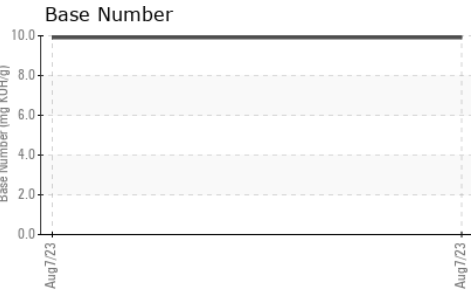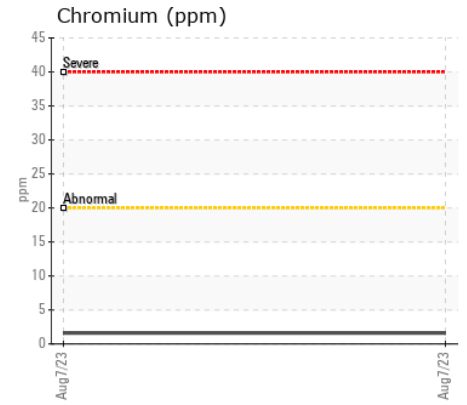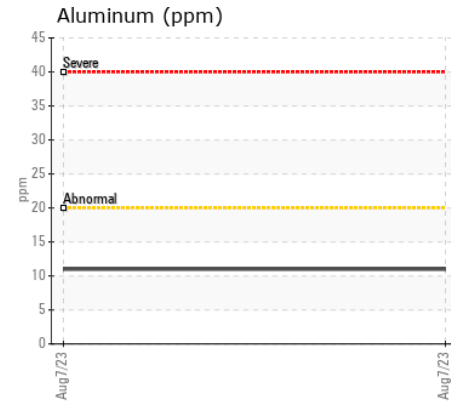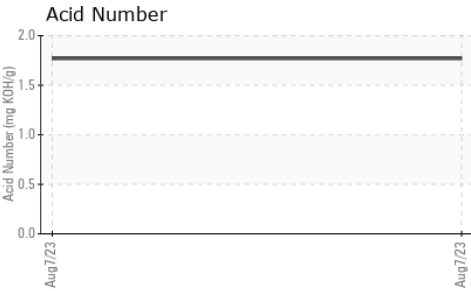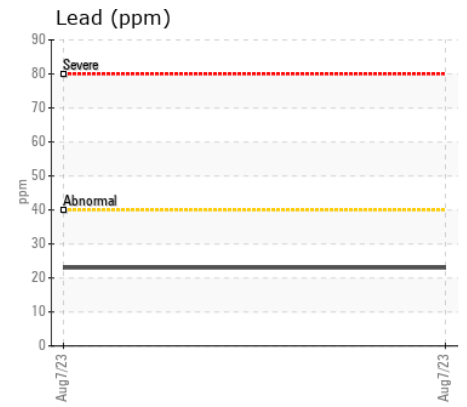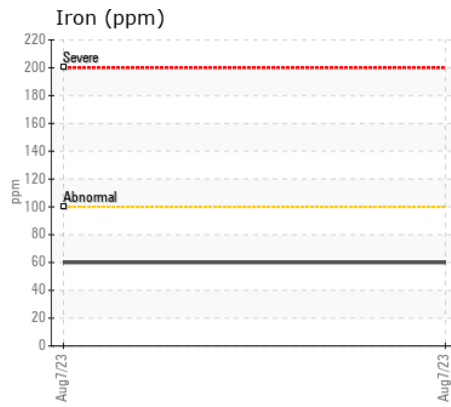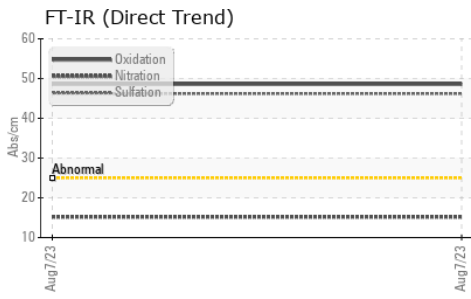

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0676259 **Received** : 16 Aug 2023
Lab Number : 05926275 **Tested** : 17 Aug 2023
Unique Number : 10606222 **Diagnosed** : 17 Aug 2023 - Don Baldrige
Test Package : MOB 2

GAP REPAIR SHOP

994 GAP RD
 KINZERS, PA
 US 17535

Contact: EMANUEL ZOOK
 jchapman959@gmail.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (717)442-9670