



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta
Machine Id
JOHN DEERE 210G 1FF210GXLKF527548
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0044430	LEC0011373	LEC0026191
Sample Date		Client Info		23 Aug 2023	07 Sep 2022	06 Dec 2021
Machine Age	hrs	Client Info		3816	3131	2169
Oil Age	hrs	Client Info		3816	3131	2169
Filter Age	hrs	Client Info		1647	3131	1134
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	18	5	20
Iron	ppm	ASTM D5185m	>32	7	6	10
Chromium	ppm	ASTM D5185m	>9	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	0	<1	1
Lead	ppm	ASTM D5185m	>28	0	0	<1
Copper	ppm	ASTM D5185m	>50	2	2	2
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	1	<1	2
Potassium	ppm	ASTM D5185m	>20	2	<1	3
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	4519	7979	104732
Particles >6µm		ASTM D7647	>20000	560	613	13207
Particles >14µm		ASTM D7647	>640	42	32	430
Particles >21µm		ASTM D7647	>160	12	9	85
Particles >38µm		ASTM D7647	>40	1	0	4
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/16/13	20/16/12	24/21/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	<1	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		1	0	<1
Calcium	ppm	ASTM D5185m		6	5	6
Phosphorus	ppm	ASTM D5185m	827	376	452	484
Zinc	ppm	ASTM D5185m	0	49	56	60
Sulfur	ppm	ASTM D5185m	13	138	142	130
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.26	0.28	0.231
Visc @ 40°C	cSt	ASTM D445	47	47.2	47.4	47.6

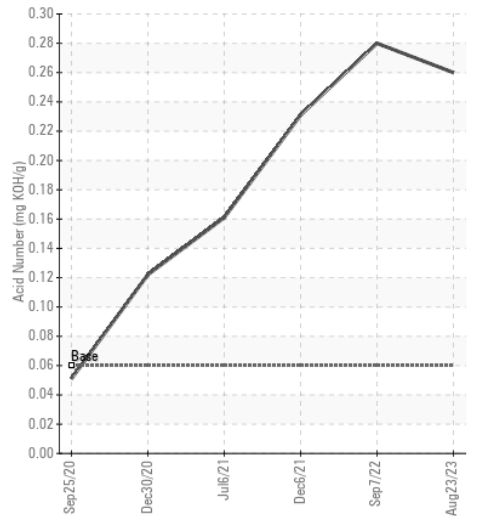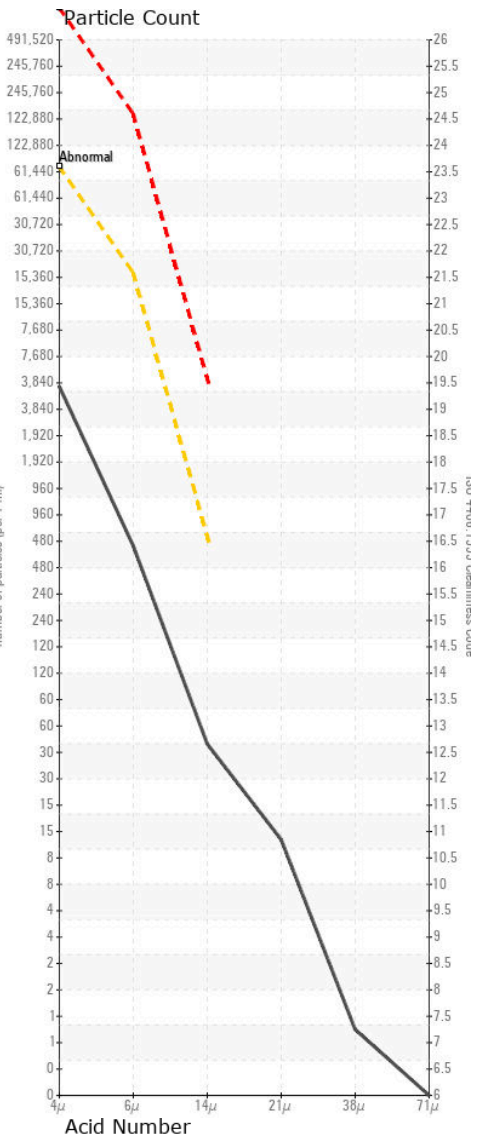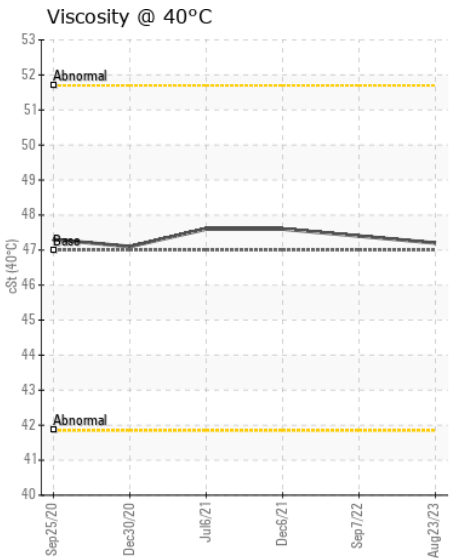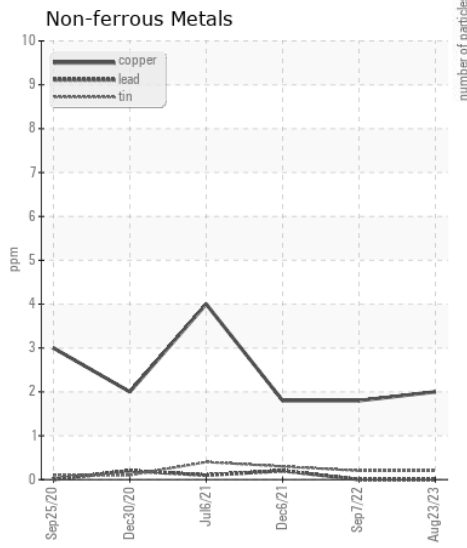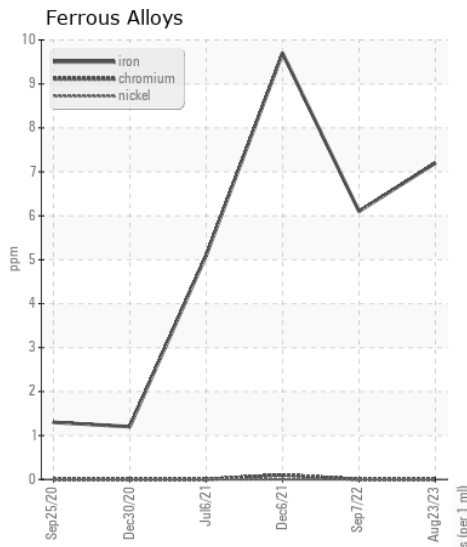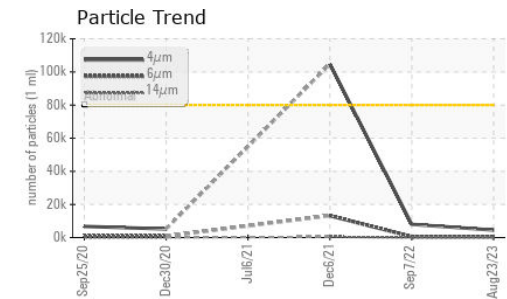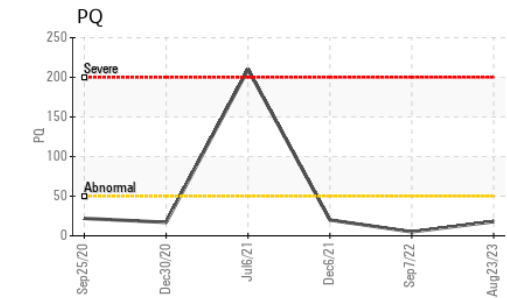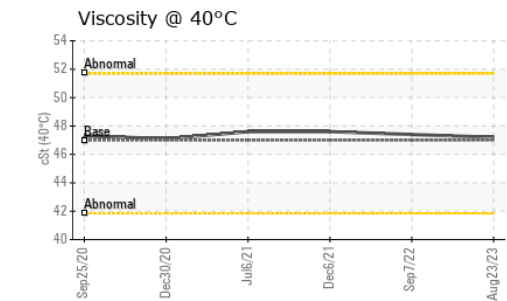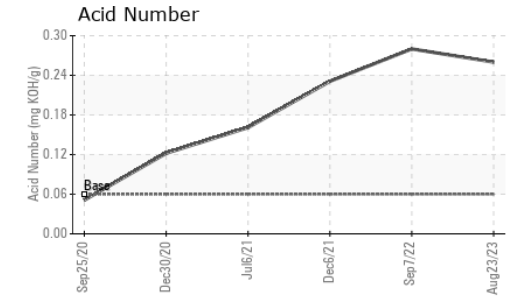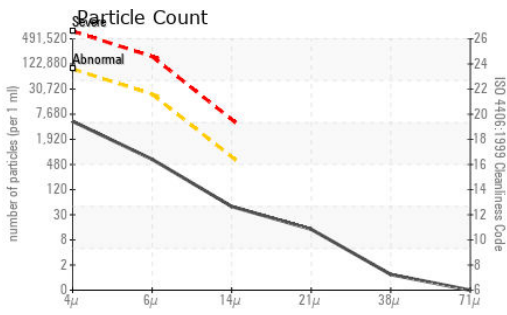

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0044430 **Received** : 25 Aug 2023
Lab Number : 05934837 **Tested** : 28 Aug 2023
Unique Number : 10620108 **Diagnosed** : 28 Aug 2023 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570