



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
AUTOCAR AUTOCAR

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05957154	---	---
Sample Date		Client Info		13 Sep 2023	---	---
Machine Age	mls	Client Info		5000	---	---
Oil Age	mls	Client Info		5000	---	---
Filter Age	mls	Client Info		5000	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>86	14	---	---
Chromium	ppm	ASTM D5185m	>3	<1	---	---
Nickel	ppm	ASTM D5185m	>3	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>15	<1	---	---
Lead	ppm	ASTM D5185m	>16	1	---	---
Copper	ppm	ASTM D5185m	>250	4	---	---
Tin	ppm	ASTM D5185m	>2	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	34	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		15	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		113	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		23	---	---
Calcium	ppm	ASTM D5185m		4422	---	---
Phosphorus	ppm	ASTM D5185m		942	---	---
Zinc	ppm	ASTM D5185m		1118	---	---
Sulfur	ppm	ASTM D5185m		5131	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		15.71	---	---
Visc @ 100°C	cSt	ASTM D445		14.9	---	---

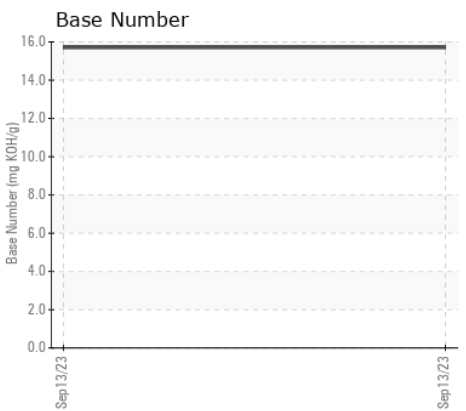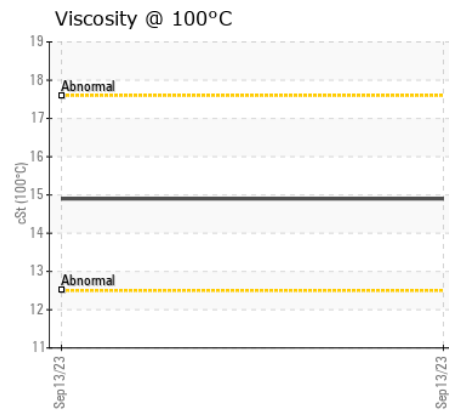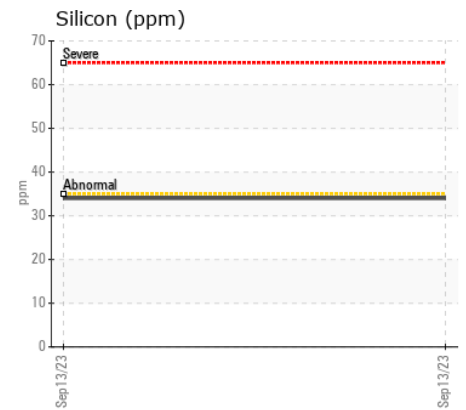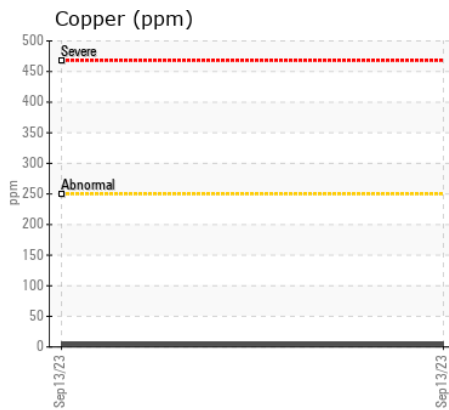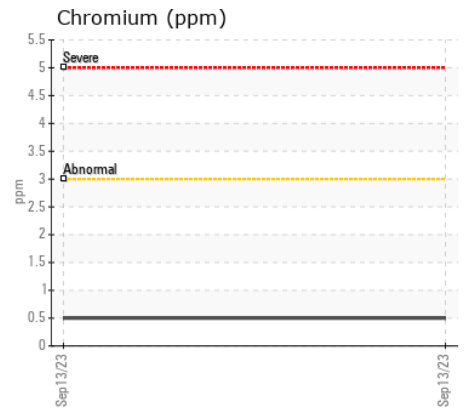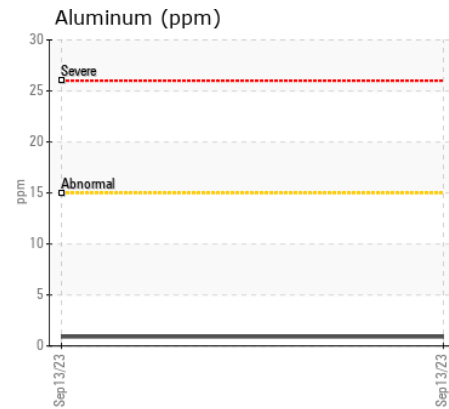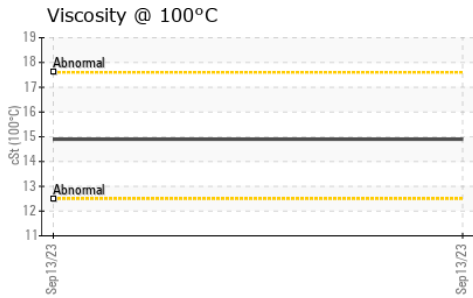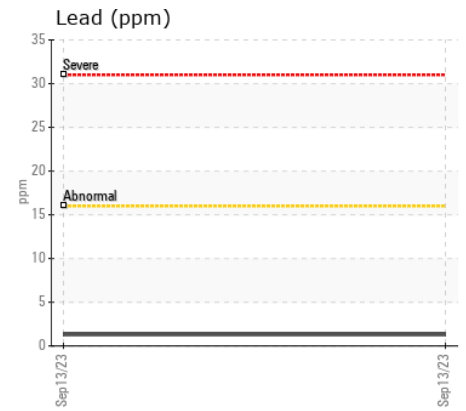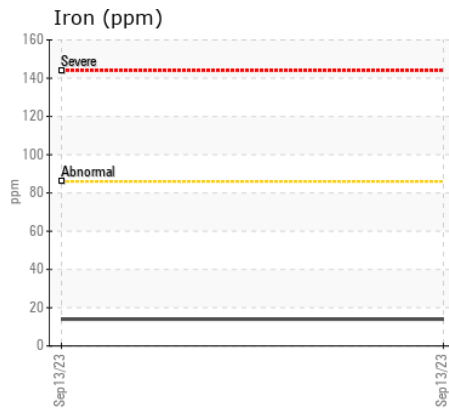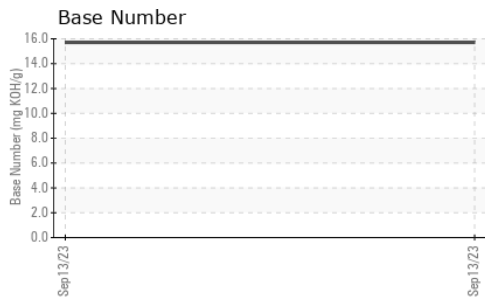

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05957154
Lab Number : 05957154
Unique Number : 10658367
Test Package : MOB 2
Received : 20 Sep 2023
Tested : 25 Sep 2023
Diagnosed : 25 Sep 2023 - Wes Davis

SPRAGUE RANCH
 6907 ROUTE 14
 BROOKFIELD, VT
 US 05036
 Contact: SCOTT BURRELL

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: