



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W14674]

Machine Id

JOHN DEERE 748L 1DW748LBCNF714000

Component

Transmission (Manual)

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W14674)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0185433	JR0098253	---
Sample Date		Client Info		03 Oct 2023	07 Jul 2023	---
Machine Age	hrs	Client Info		2536	2105	---
Oil Age	hrs	Client Info		431	2105	---
Filter Age	hrs	Client Info		431	2104	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	13	10	---
Iron	ppm	ASTM D5185m	>200	7	12	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	2	---
Lead	ppm	ASTM D5185m	>45	<1	<1	---
Copper	ppm	ASTM D5185m	>225	3	7	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	4	5	---
Potassium	ppm	ASTM D5185m	>20	4	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	5	---
Boron	ppm	ASTM D5185m	6	<1	3	---
Barium	ppm	ASTM D5185m	0	0	2	---
Molybdenum	ppm	ASTM D5185m	0	0	3	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	145	113	103	---
Calcium	ppm	ASTM D5185m	3570	3673	3445	---
Phosphorus	ppm	ASTM D5185m	1290	1299	1038	---
Zinc	ppm	ASTM D5185m	1640	1730	1306	---
Sulfur	ppm	ASTM D5185m		7148	4241	---
Visc @ 40°C	cSt	ASTM D445	57.0	53.9	48.3	---

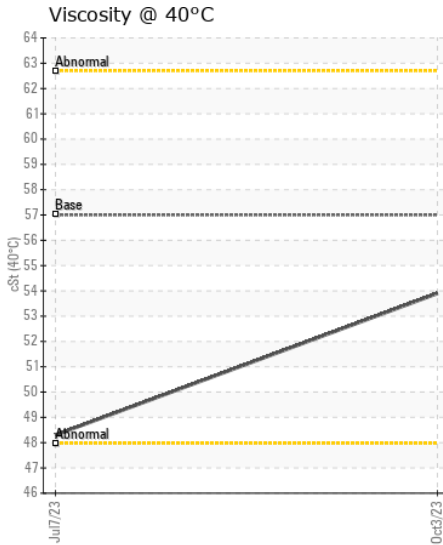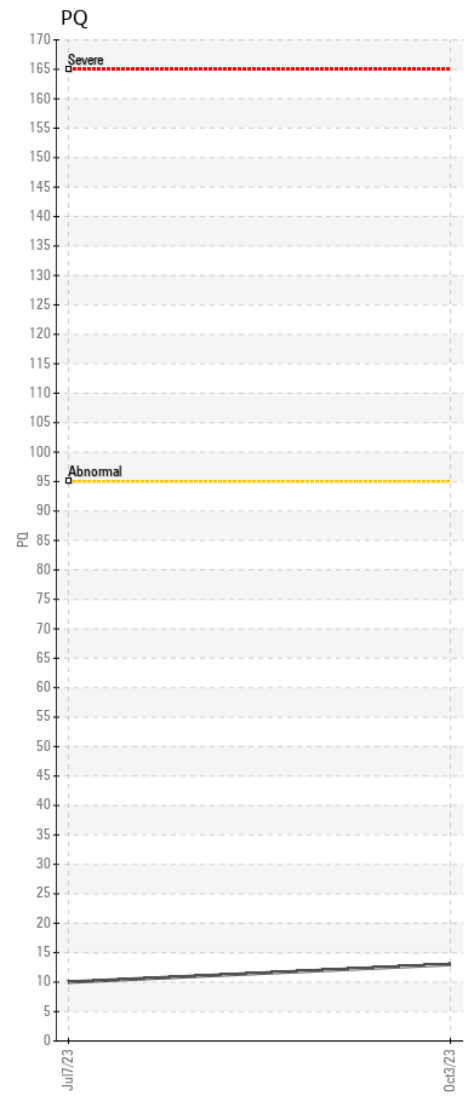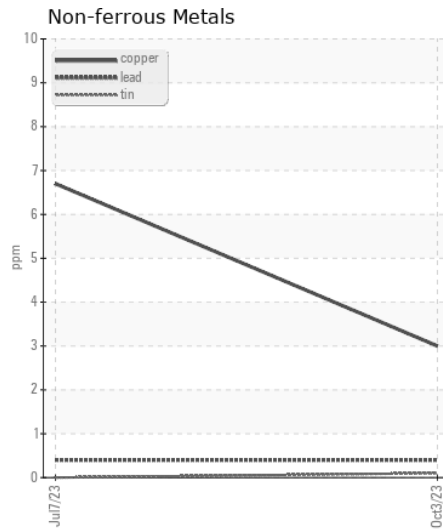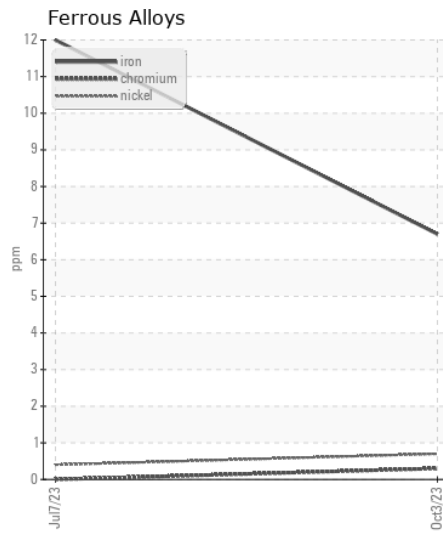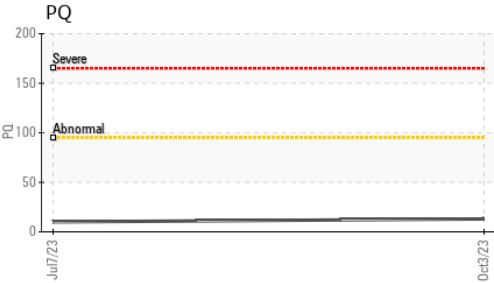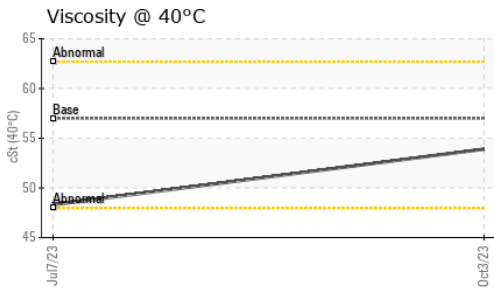

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0185433 **Received** : 05 Oct 2023
Lab Number : 05970949 **Diagnosed** : 10 Oct 2023
Unique Number : 10682899 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MOUNT GILEAD
 305 NORTH MAIN STREET
 MOUNT GILEAD, NC
 US 27306

Contact: TIM ELSWORTH
 telsworth@jamesriverequipment.com

T: (910)439-5653
 F: (910)439-4568