



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 980H LOADER 6583 (S/N JMS05055)
Component
Rear Differential
Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10002732	TO10002307	TO10002222
Sample Date		Client Info		02 Oct 2023	14 Jul 2023	03 May 2023
Machine Age	hrs	Client Info		34179	33615	33129
Oil Age	hrs	Client Info		2576	2012	1526
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		43	50	52
Iron	ppm	ASTM D5185m	>500	59	72	61
Chromium	ppm	ASTM D5185m	>3	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	3	6
Lead	ppm	ASTM D5185m	>13	<1	0	0
Copper	ppm	ASTM D5185m	>103	1	<1	0
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	18	20	17
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	6	4
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		13	13	18
Calcium	ppm	ASTM D5185m		3091	3727	3389
Phosphorus	ppm	ASTM D5185m		960	1026	954
Zinc	ppm	ASTM D5185m		1185	1323	1207
Sulfur	ppm	ASTM D5185m		4825	6537	5622
Acid Number (AN)	mg KOH/g	ASTM D8045		1.12	1.25	1.30
Visc @ 40°C	cSt	ASTM D445		208	211	211
Visc @ 100°C	cSt	ASTM D445		18.2	18.3	18.4
Viscosity Index (VI)	Scale	ASTM D2270		96	95	96

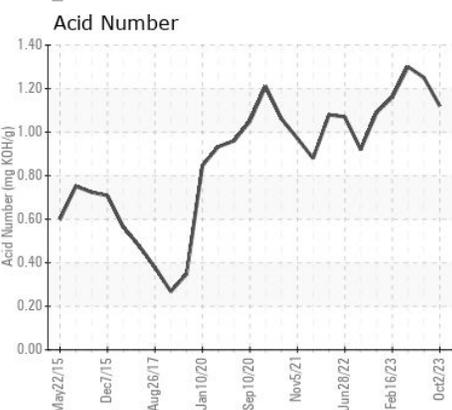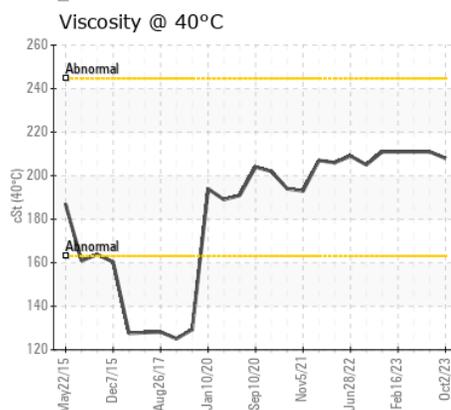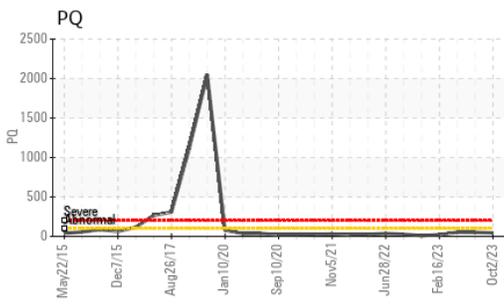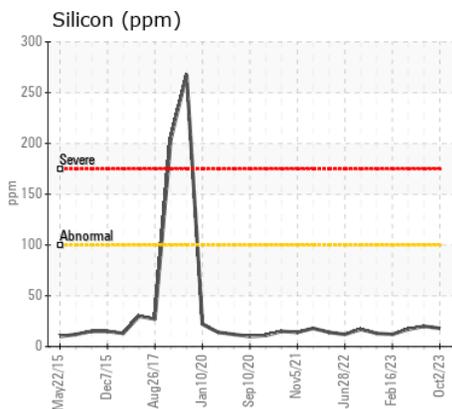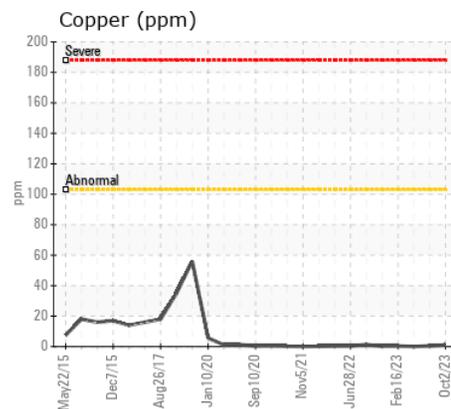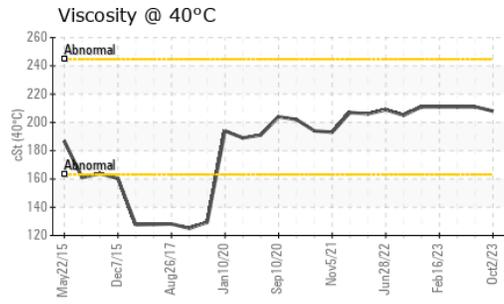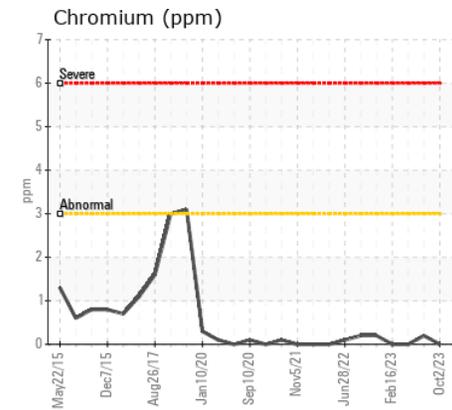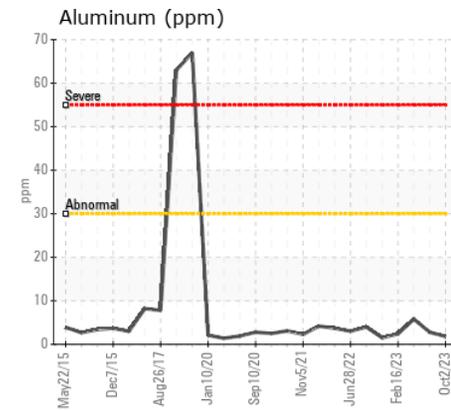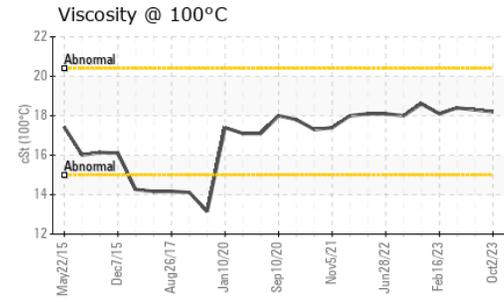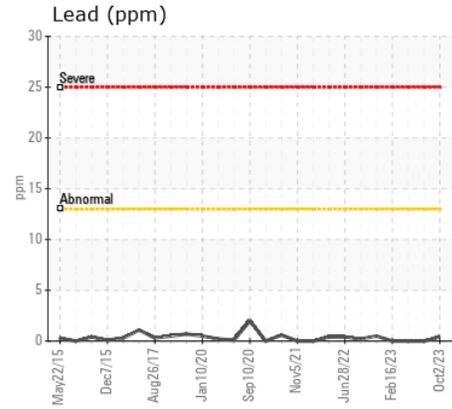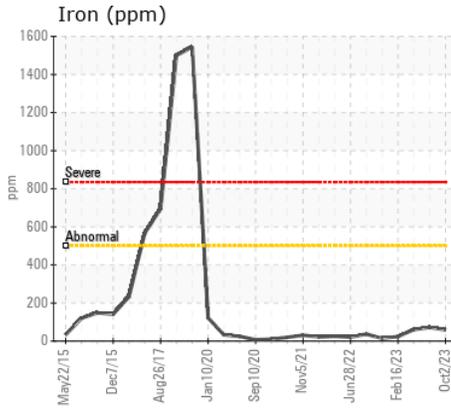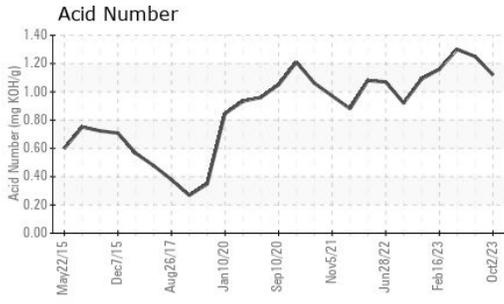

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002732 **Received** : 06 Oct 2023
Lab Number : 05972266 **Diagnosed** : 09 Oct 2023
Unique Number : 10684216 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)