



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 775F HAUL TRUCK 6151 (S/N DLS00524)

Component
Rear Left Differential

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10002736	---	---
Sample Date		Client Info		29 Sep 2023	---	---
Machine Age	hrs	Client Info		542	---	---
Oil Age	hrs	Client Info		542	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		42	---	---
Iron	ppm	ASTM D5185m	>500	42	---	---
Chromium	ppm	ASTM D5185m	>3	<1	---	---
Nickel	ppm	ASTM D5185m	>3	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>13	1	---	---
Copper	ppm	ASTM D5185m	>103	4	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	35	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within ISO 220 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		3	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		26	---	---
Calcium	ppm	ASTM D5185m		2716	---	---
Phosphorus	ppm	ASTM D5185m		943	---	---
Zinc	ppm	ASTM D5185m		1149	---	---
Sulfur	ppm	ASTM D5185m		4368	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.09	---	---
Visc @ 40°C	cSt	ASTM D445		197	---	---
Visc @ 100°C	cSt	ASTM D445		17.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270		95	---	---

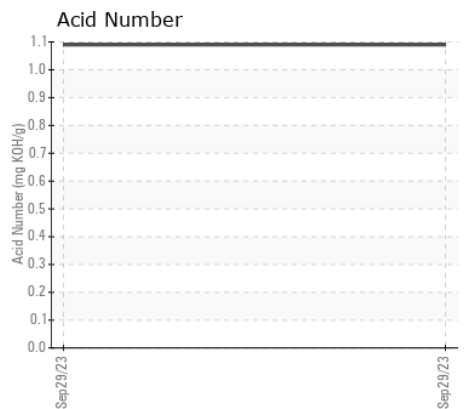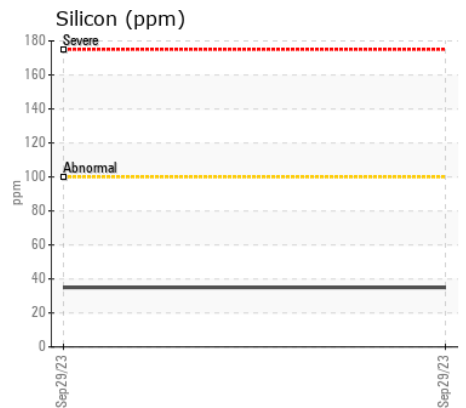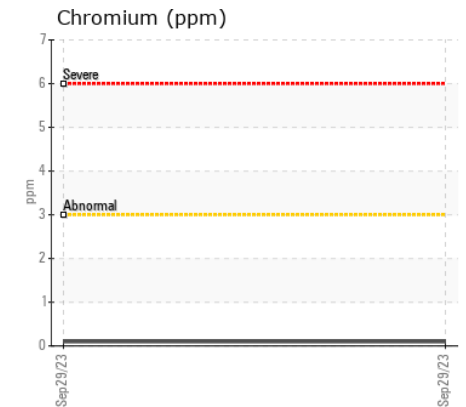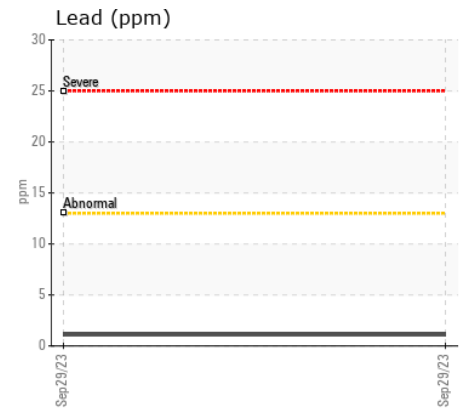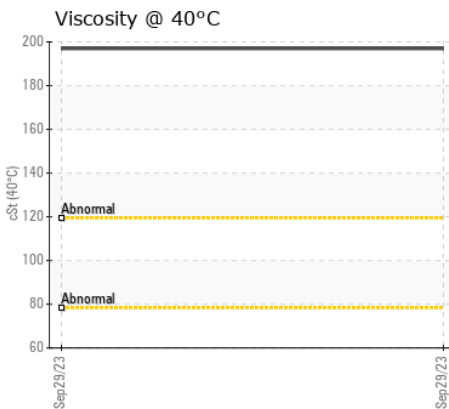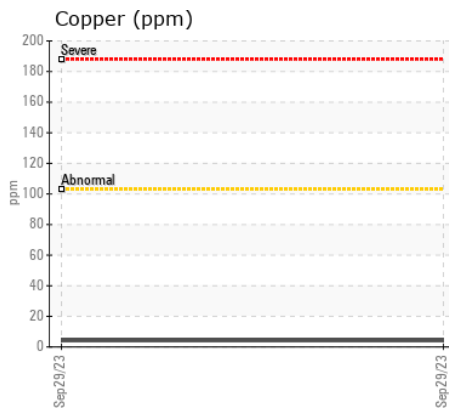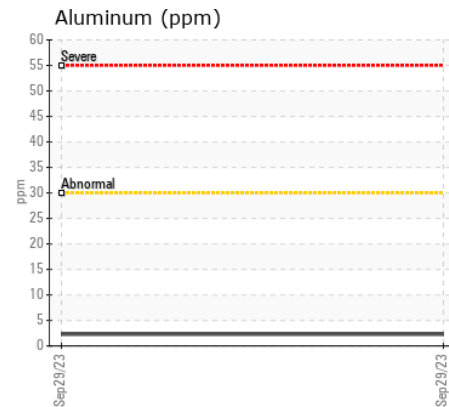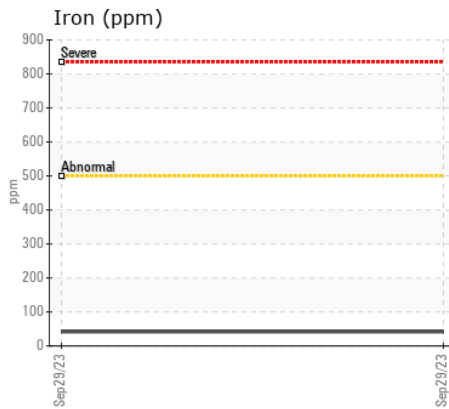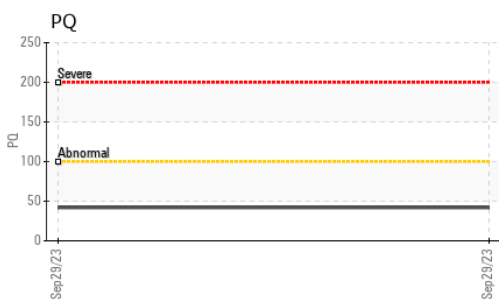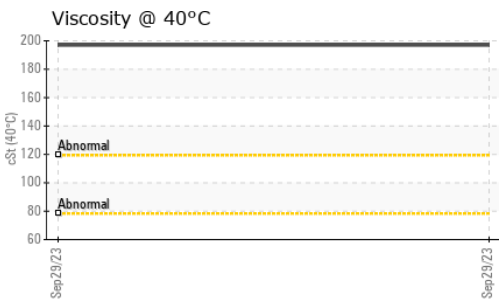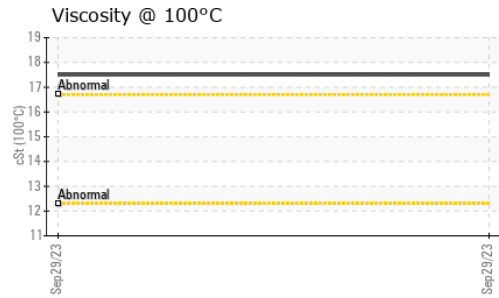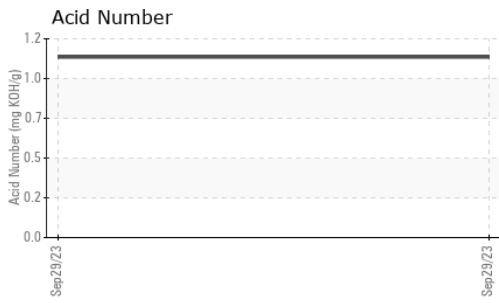

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002736 **Received** : 06 Oct 2023
Lab Number : 05972272 **Diagnosed** : 10 Oct 2023
Unique Number : 10684222 **Diagnostician** : Angela Borella
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com
 T: (918)928-4575
 F: