



ASCENDUM

OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area

Ascendum Machinery

Machine Id

VOLVO A30G ORT-30 (S/N A30GV752549)

Component

Front Axle

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0005384	VCP0000547	---
Sample Date		Client Info		12 Oct 2023	09 Jun 2022	---
Machine Age	hrs	Client Info		2594	681	---
Oil Age	hrs	Client Info		1913	681	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	329	176	---
Chromium	ppm	ASTM D5185m	>20	6	5	---
Nickel	ppm	ASTM D5185m	>10	5	2	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	29	18	---
Tin	ppm	ASTM D5185m	>20	2	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	5	4	---
Potassium	ppm	ASTM D5185m	>20	5	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	2	---
Boron	ppm	ASTM D5185m		240	313	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		6	5	---
Manganese	ppm	ASTM D5185m		13	11	---
Magnesium	ppm	ASTM D5185m		2	2	---
Calcium	ppm	ASTM D5185m		760	802	---
Phosphorus	ppm	ASTM D5185m		1326	1278	---
Zinc	ppm	ASTM D5185m		372	333	---
Sulfur	ppm	ASTM D5185m		24239	17065	---
Visc @ 40°C	cSt	ASTM D445		87.3	90.5	---

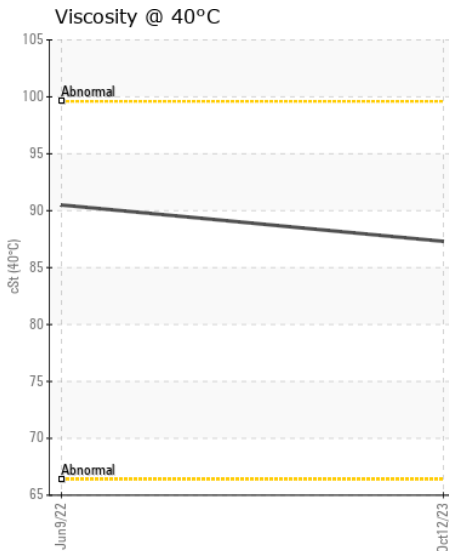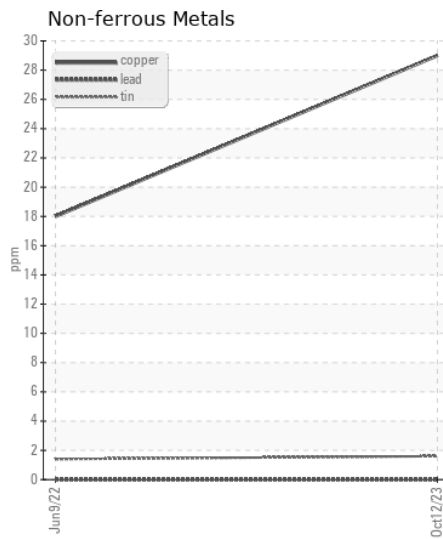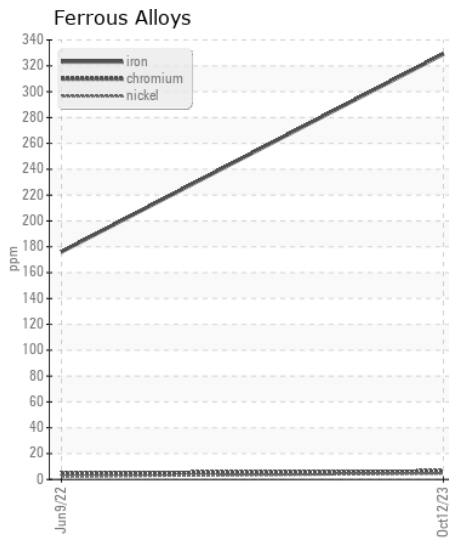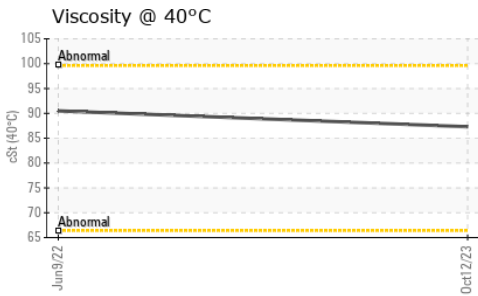

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0005384
Lab Number : 05978544
Unique Number : 10695839
Test Package : CONST

Received : 13 Oct 2023
Tested : 15 Oct 2023
Diagnosed : 17 Oct 2023 - Don Baldrige

PEDULLA EXCAVATING & PAVING
 1275 SHINN FARM RD
 MOORESVILLE, NC
 US 28115
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: