



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
813634
 Component
Diesel Engine
 Fluid
MOBIL DELVAC EXTREME 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

Metal levels are typical for a new component breaking in.










CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0008064	---	---
Sample Date		Client Info		23 Aug 2023	---	---
Machine Age	hrs	Client Info		17944	---	---
Oil Age	hrs	Client Info		17944	---	---
Filter Age	hrs	Client Info		17944	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>100	62	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	35	---	---
Lead	ppm	ASTM D5185m	>40	3	---	---
Copper	ppm	ASTM D5185m	>330	27	---	---
Tin	ppm	ASTM D5185m	>15	3	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>25	39	---	---
Potassium	ppm	ASTM D5185m	>20	133	---	---
Fuel	%	ASTM D3524	>5	0.6	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		38	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m		719	---	---
Calcium	ppm	ASTM D5185m		1232	---	---
Phosphorus	ppm	ASTM D5185m		689	---	---
Zinc	ppm	ASTM D5185m		801	---	---
Sulfur	ppm	ASTM D5185m		2540	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	6.5	---	---
Visc @ 100°C	cSt	ASTM D445	14.3	11.6	---	---

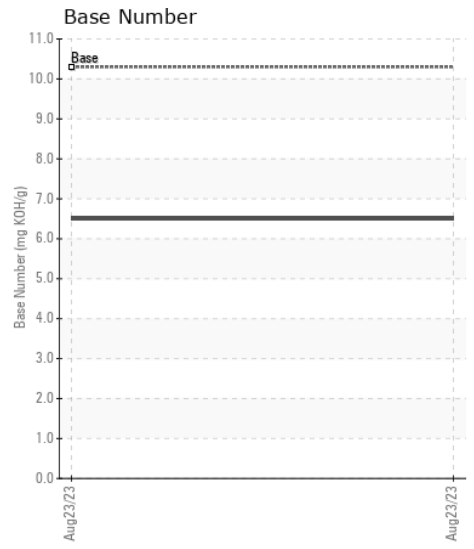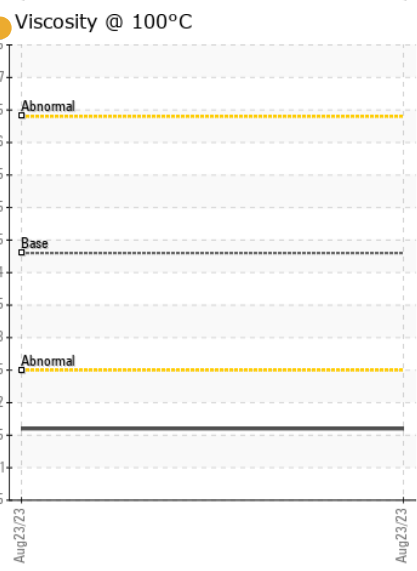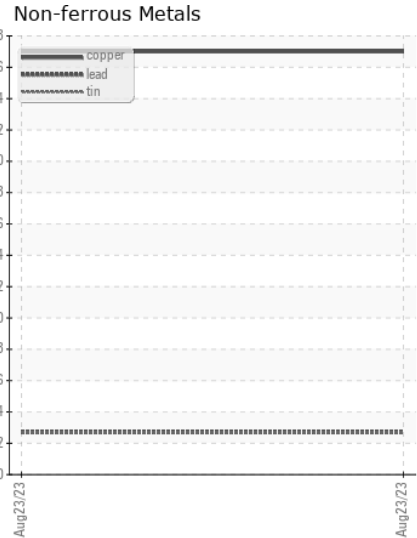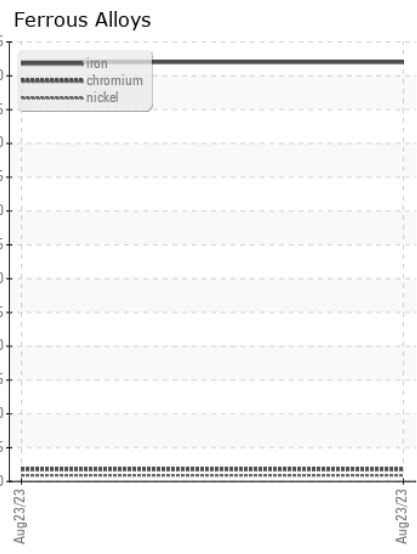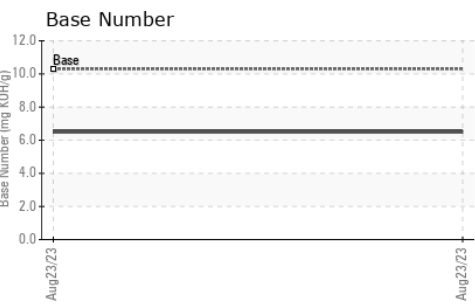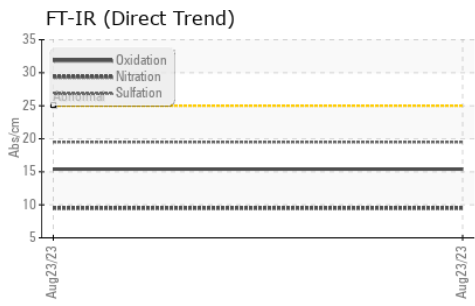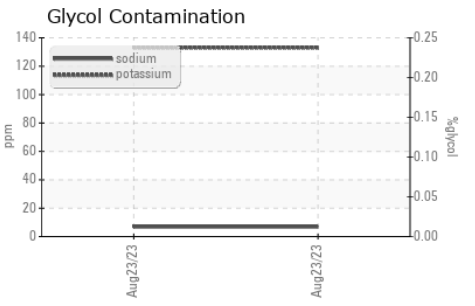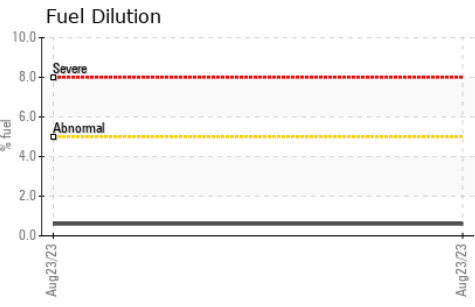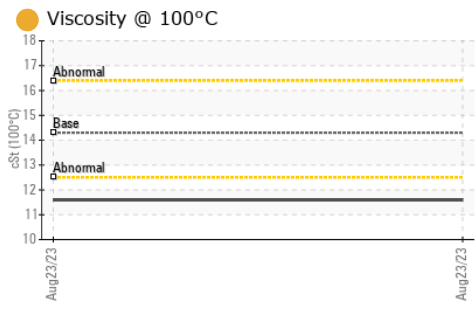

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0008064 **Received** : 16 Oct 2023
Lab Number : 05979228 **Tested** : 17 Oct 2023
Unique Number : 10696523 **Diagnosed** : 17 Oct 2023 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, KV40, PercentFuel)

RTL PACLEASE - 7017 - Oklahoma City
 8700 West I-40
 Oklahoma City, OK
 US 73128
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: