



Machine Id
HBR
Component
Port Genset
Fluid
CHEVRON URSA SUPER PLUS 40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW05981731 | MW05934678 | MW05904215 |
| Sample Date | | Client Info | | 16 Oct 2023 | 24 Aug 2023 | 20 Jul 2023 |
| Machine Age | hrs | Client Info | | 21155 | 19736 | 19223 |
| Oil Age | hrs | Client Info | | 419 | 513 | 842 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >50 | 6 | 9 | 9 |
| Chromium | ppm | ASTM D5185m | >4 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >12 | 4 | 5 | 3 |
| Lead | ppm | ASTM D5185m | >17 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >70 | <1 | <1 | 0 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 5 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | <1 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 0.1 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.8 | 6.6 | 7.4 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.0 | 22.4 | 22.9 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 0 | 2 | 1 |
| Boron | ppm | ASTM D5185m | | 363 | 330 | 343 |
| Barium | ppm | ASTM D5185m | | 10 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 103 | 120 | 109 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | | 441 | 616 | 553 |
| Calcium | ppm | ASTM D5185m | | 1797 | 1713 | 1765 |
| Phosphorus | ppm | ASTM D5185m | 1000 | 785 | 819 | 979 |
| Zinc | ppm | ASTM D5185m | 1090 | 921 | 995 | 1208 |
| Sulfur | ppm | ASTM D5185m | | 2727 | 3187 | 3726 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.6 | 17.4 | 18.9 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 7.4 | 8.0 | 7.8 | 7.5 |
| Visc @ 100°C | cSt | ASTM D445 | 14.7 | 13.3 | 12.7 | 12.6 |

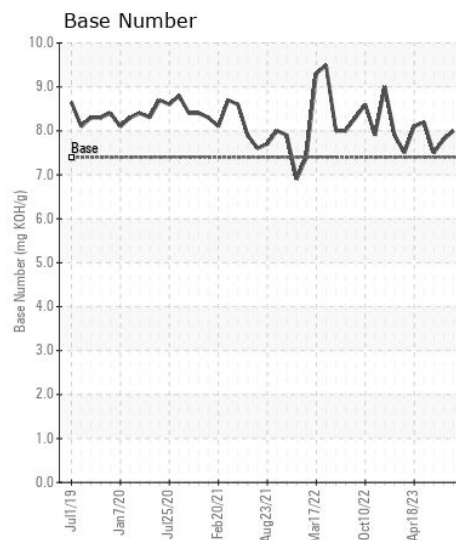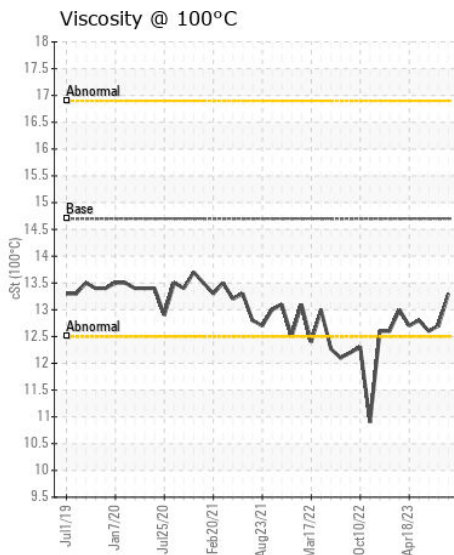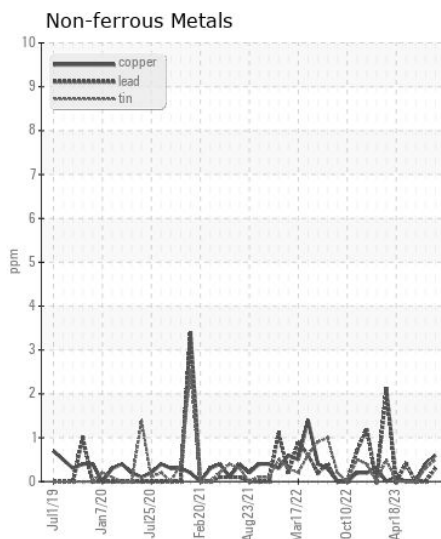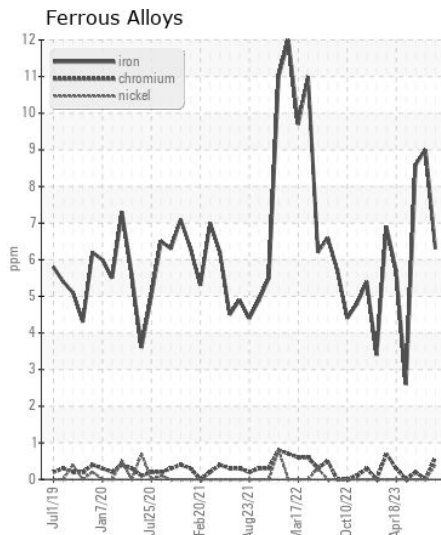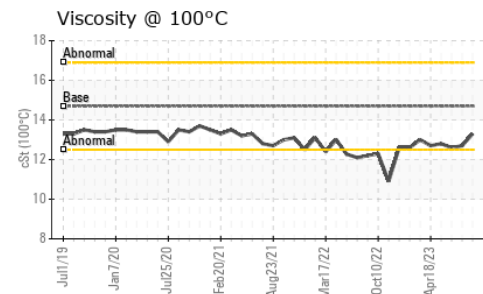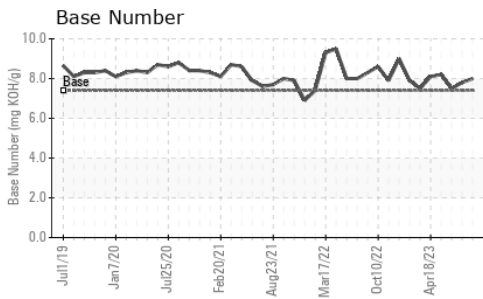

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW05981731
Lab Number : 05981731
Unique Number : 10699026
Test Package : MAR 2

Received : 17 Oct 2023
Tested : 18 Oct 2023
Diagnosed : 19 Oct 2023 - Don Baldrige

ILLINOIS MARINE TOWING
 PO BOX 391
 LEMONT, IL
 US 60439
 Contact: RHETT DANIEL
 rdaniel@imtowing.com
 T: (630)280-4926
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)