



WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	SEVERE

Machine Id
MWL
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 XLE 15W40 (39 GAL)

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you change the oil at the next available stoppage or outage. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW05981762	MW05904211	MW05843075
Sample Date		Client Info		16 Oct 2023	20 Jul 2023	09 May 2023
Machine Age	hrs	Client Info		37404	36707	35532
Oil Age	hrs	Client Info		697	975	832
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	SEVERE	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	10	24	10
Chromium	ppm	ASTM D5185m	>8	<1	2	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	2
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	2	2
Lead	ppm	ASTM D5185m	>18	3	▲ 52	<1
Copper	ppm	ASTM D5185m	>80	1	1	<1
Tin	ppm	ASTM D5185m	>14	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>20	4	4	4
Potassium	ppm	ASTM D5185m	>20	2	0	2
Fuel	%	ASTM D3524	>4.0	▲ 13.0	▲ 17.1	▲ 8.2
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		1.6	2.7	1.9
Nitration	Abs/cm	*ASTM D7624	>20	8.3	10.0	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.6	29.3	25.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>75	0	3	2
Boron	ppm	ASTM D5185m		298	62	209
Barium	ppm	ASTM D5185m		10	0	0
Molybdenum	ppm	ASTM D5185m		110	25	77
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		503	183	501
Calcium	ppm	ASTM D5185m		1254	1782	1254
Phosphorus	ppm	ASTM D5185m	760	647	694	694
Zinc	ppm	ASTM D5185m	830	756	834	844
Sulfur	ppm	ASTM D5185m	2770	2292	3292	2704
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.6	27.4	20.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	6.5	▲ 2.9	6.7
Visc @ 100°C	cSt	ASTM D445	14.9	▲ 10.3	▲ 8.4	▲ 11.6

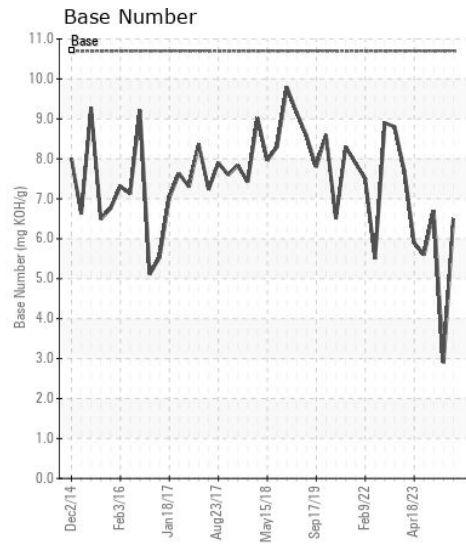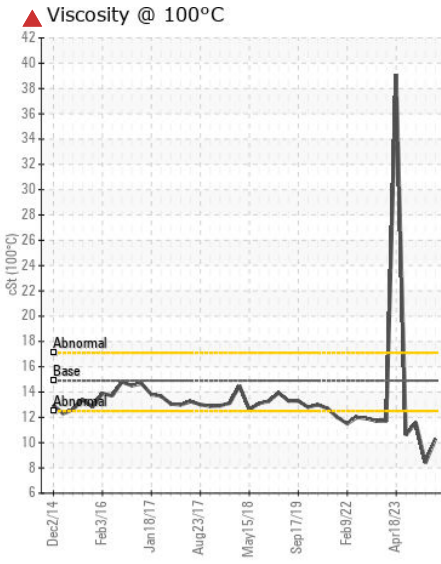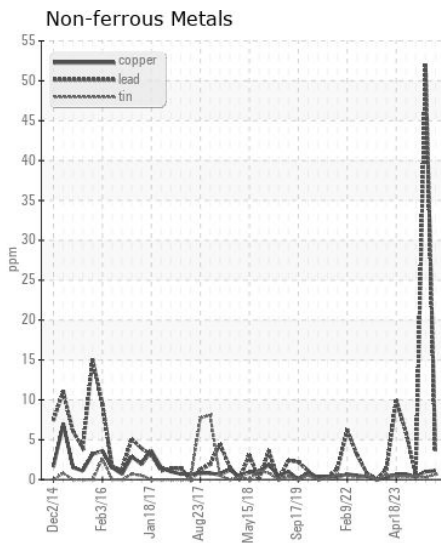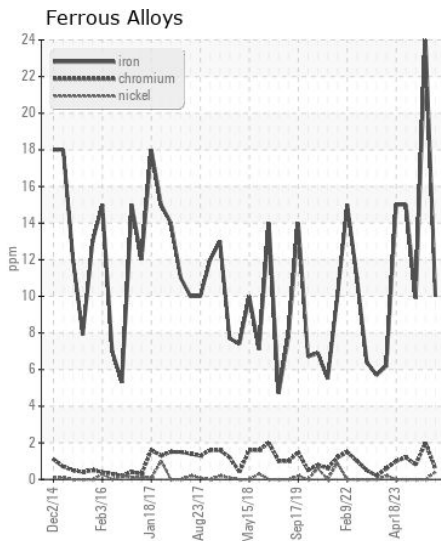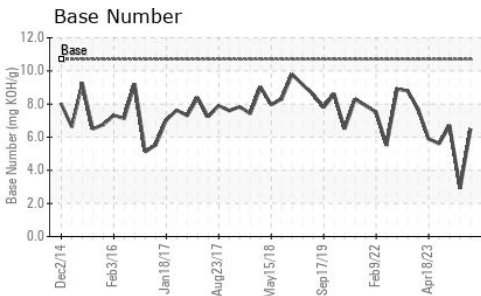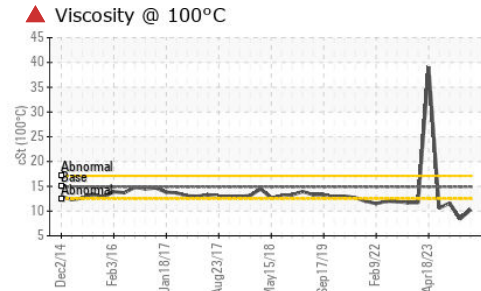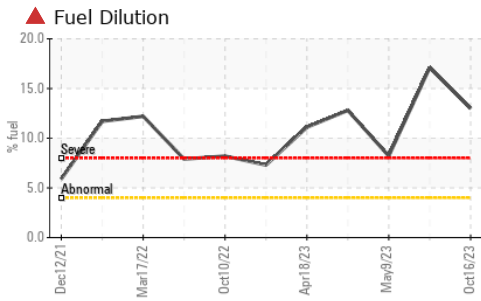

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW05981762 **Received** : 17 Oct 2023
Lab Number : 05981762 **Tested** : 18 Oct 2023
Unique Number : 10699057 **Diagnosed** : 18 Oct 2023 - Wes Davis
Test Package : MAR 2 (Additional Tests: PercentFuel)

ILLINOIS MARINE TOWING
 PO BOX 391
 LEMONT, IL
 US 60439
 Contact: RHETT DANIEL
 rdaniel@imtowing.com
 T: (630)280-4926
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)