



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[W47307]**

Machine Id

**JOHN DEERE 844K 1DW844KAEJF688182**

Component

**Transmission (Manual)**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0179110</b>	JR0165935	JR0165798
Sample Date		Client Info		<b>16 Oct 2023</b>	24 Jul 2023	05 May 2023
Machine Age	hrs	Client Info		<b>7945</b>	6923	6135
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>19</b>	14	16
Iron	ppm	ASTM D5185m	>200	<b>57</b>	50	61
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	5
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>13</b>	11	12
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	<b>6</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	5	5
Boron	ppm	ASTM D5185m	6	<b>2</b>	0	1
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	145	<b>99</b>	103	89
Calcium	ppm	ASTM D5185m	3570	<b>3102</b>	3374	3345
Phosphorus	ppm	ASTM D5185m	1290	<b>1016</b>	1062	1037
Zinc	ppm	ASTM D5185m	1640	<b>1171</b>	1221	1262
Sulfur	ppm	ASTM D5185m		<b>3213</b>	4060	4246
Visc @ 40°C	cSt	ASTM D445	57.0	<b>49.4</b>	49.4	47.5

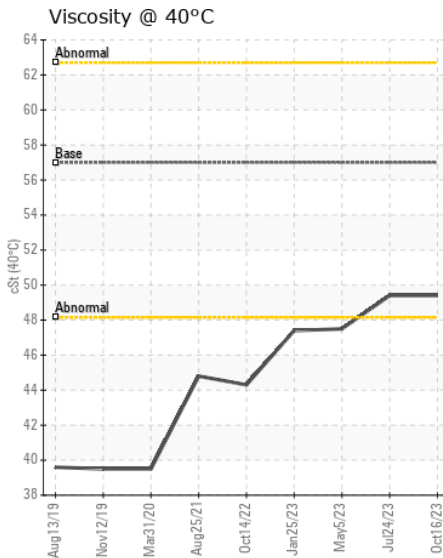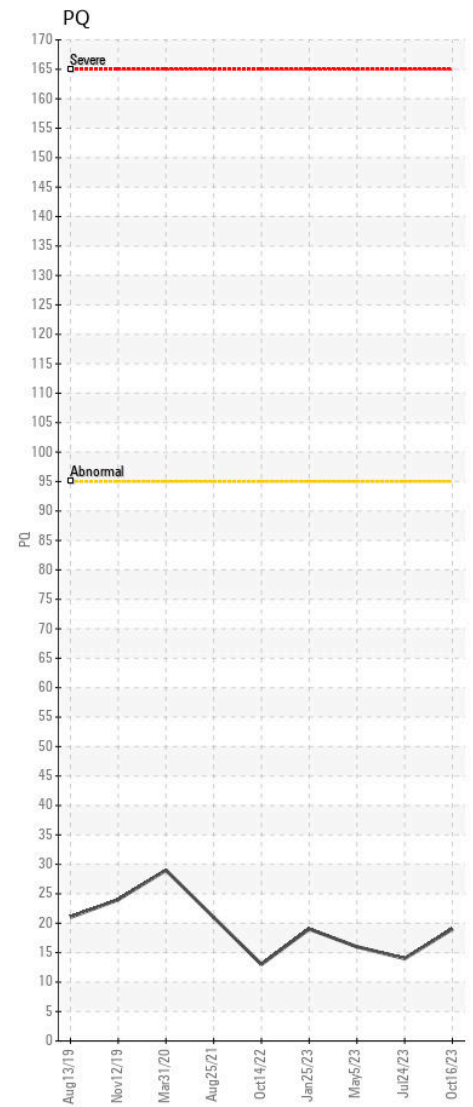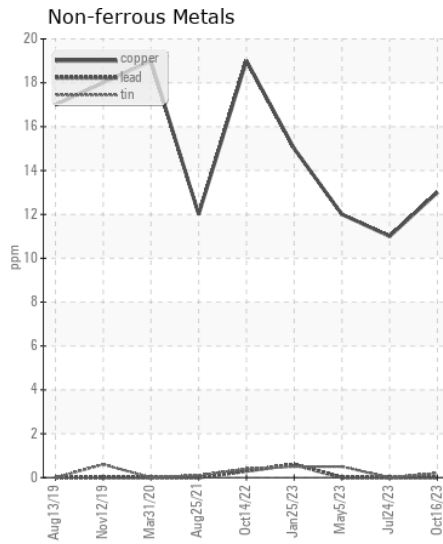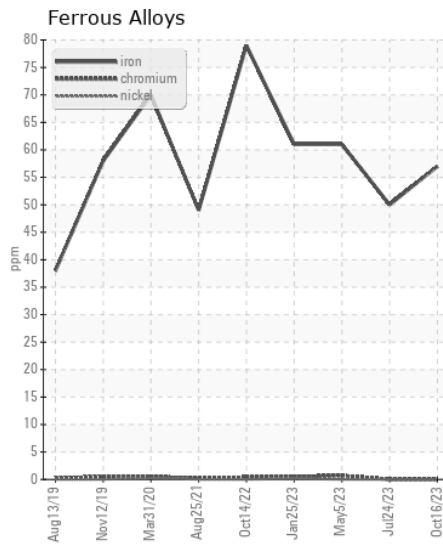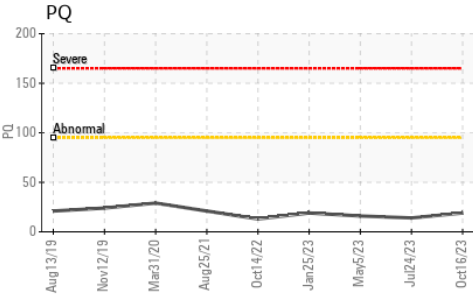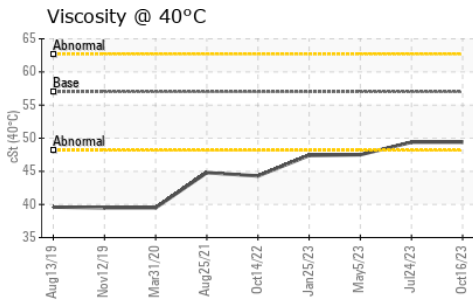

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0179110 **Received** : 18 Oct 2023  
**Lab Number** : 05982546 **Tested** : 19 Oct 2023  
**Unique Number** : 10699841 **Diagnosed** : 19 Oct 2023 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292