



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont
Machine Id
JOHN DEERE 210G 1FF210GXJNF530285
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0043862	LEC0037169	---
Sample Date		Client Info		17 Oct 2023	03 Jan 2023	---
Machine Age	hrs	Client Info		735	283	---
Oil Age	hrs	Client Info		735	283	---
Filter Age	hrs	Client Info		735	283	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				ATTENTION	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	14	---
Iron	ppm	ASTM D5185m	>32	3	<1	---
Chromium	ppm	ASTM D5185m	>9	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>9	0	0	---
Lead	ppm	ASTM D5185m	>28	0	0	---
Copper	ppm	ASTM D5185m	>50	2	2	---
Tin	ppm	ASTM D5185m	>5	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is a moderate amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>11	<1	<1	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	30795	660	---
Particles >6µm		ASTM D7647	>20000	11031	155	---
Particles >14µm		ASTM D7647	>640	812	10	---
Particles >21µm		ASTM D7647	>160	216	3	---
Particles >38µm		ASTM D7647	>40	8	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	22/21/17	17/14/10	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		0	1	---
Phosphorus	ppm	ASTM D5185m	827	487	566	---
Zinc	ppm	ASTM D5185m	0	26	29	---
Sulfur	ppm	ASTM D5185m	13	134	146	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.17	0.12	---
Visc @ 40°C	cSt	ASTM D445	47	46.7	47.0	---

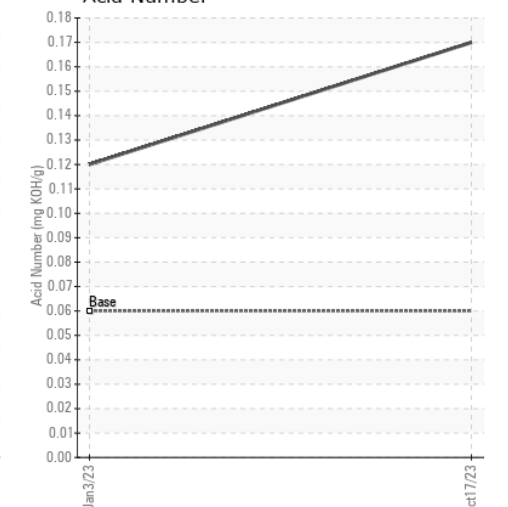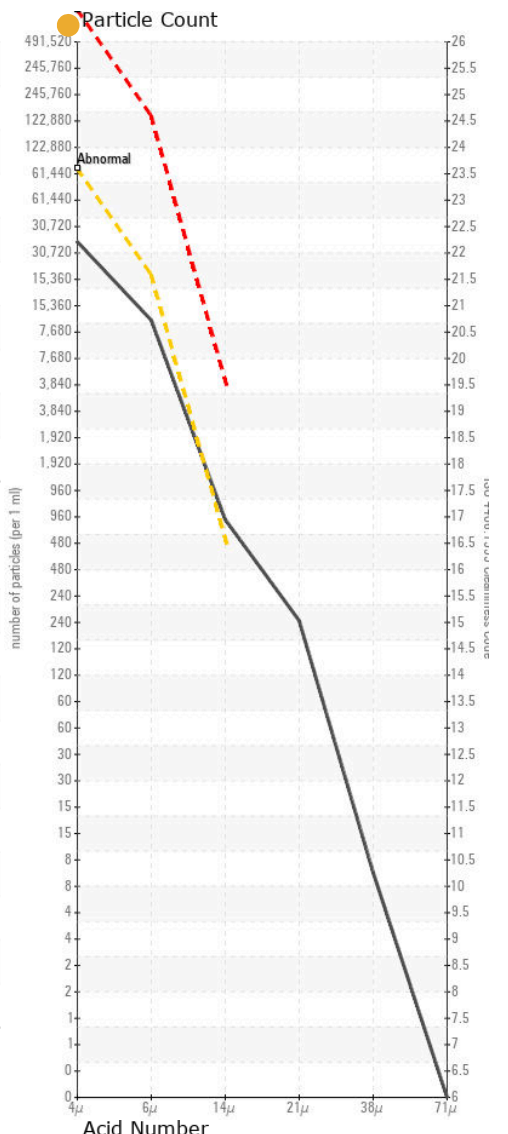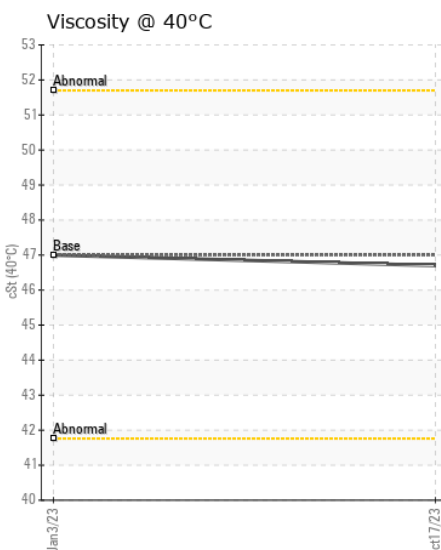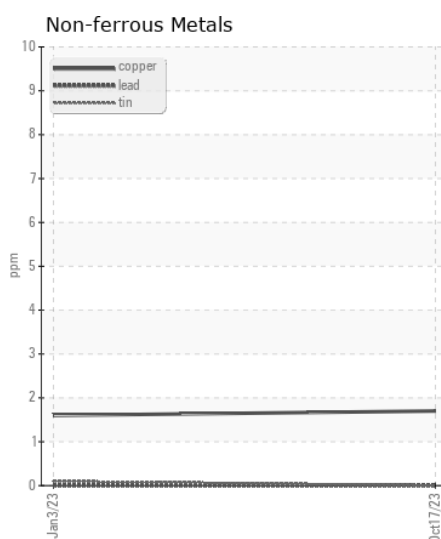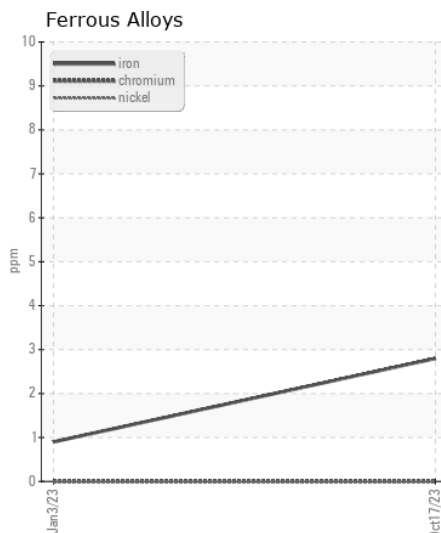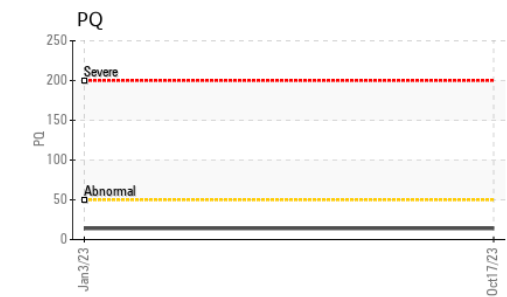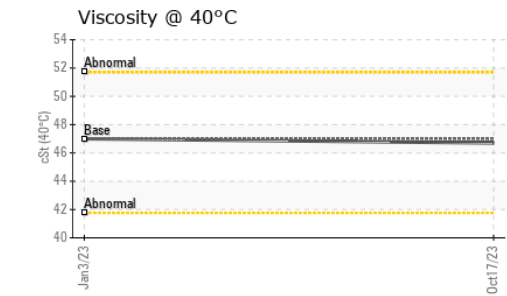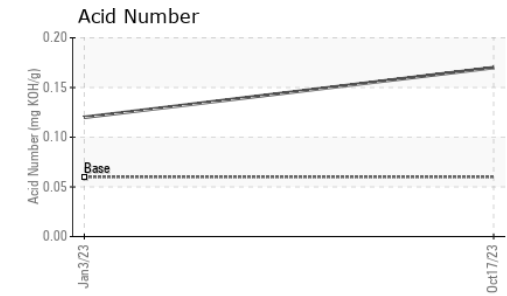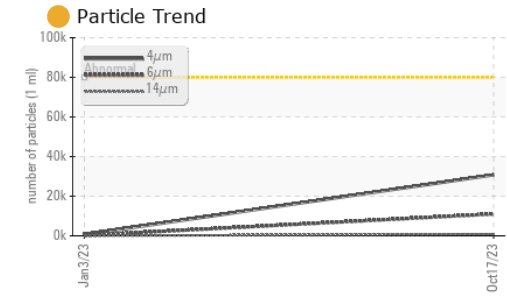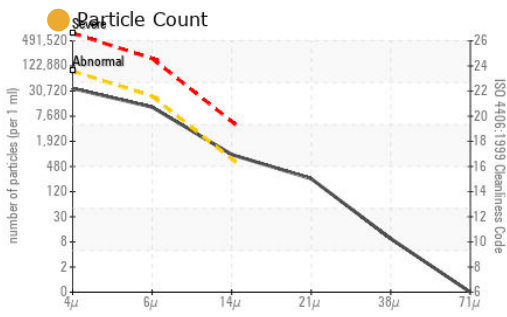

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0043862 Received : 19 Oct 2023
 Lab Number : 05983534 Tested : 20 Oct 2023
 Unique Number : 10700829 Diagnosed : 20 Oct 2023 - Don Baldrige
 Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)