



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
MATTEI 10008203-2019 (S/N 1008203-2019)

Component
Compressor

Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION









The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN37417	---	---
Sample Date		Client Info		12 Oct 2023	---	---
Machine Age	hrs	Client Info		5124	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				MARGINAL	---	---

Iron	ppm	ASTM D5185m	>50	29	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m	>25	▲ 27	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water	%	ASTM D6304	>0.1	0.065	---	---
ppm Water	ppm	ASTM D6304	>1000	657.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

Sodium	ppm	ASTM D5185m		11	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		2	---	---
Phosphorus	ppm	ASTM D5185m		1066	---	---
Zinc	ppm	ASTM D5185m		35	---	---
Sulfur	ppm	ASTM D5185m		235	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	---	---
Visc @ 40°C	cSt	ASTM D445		82.9	---	---

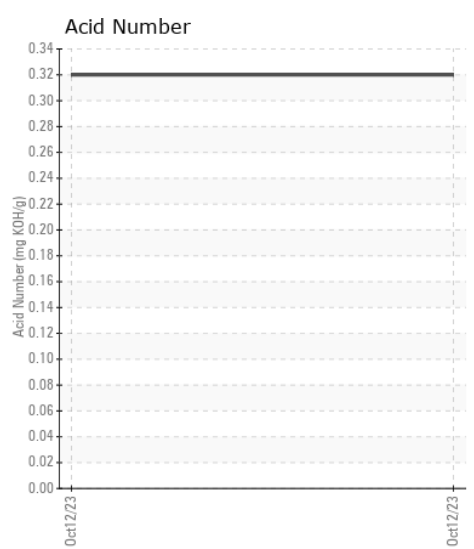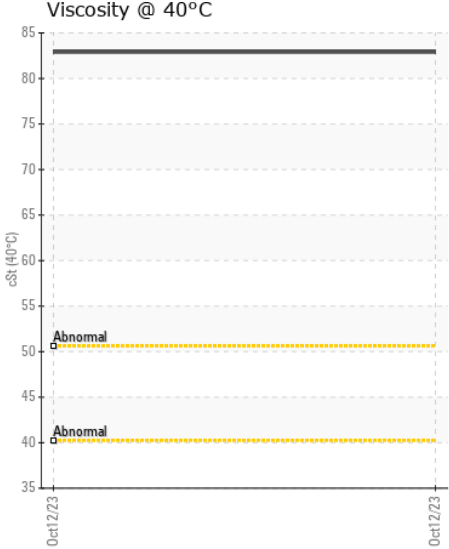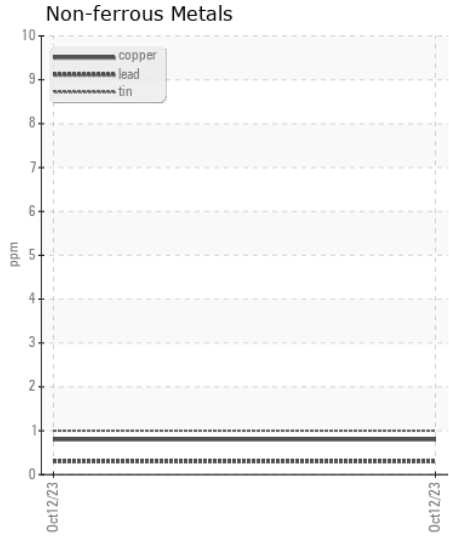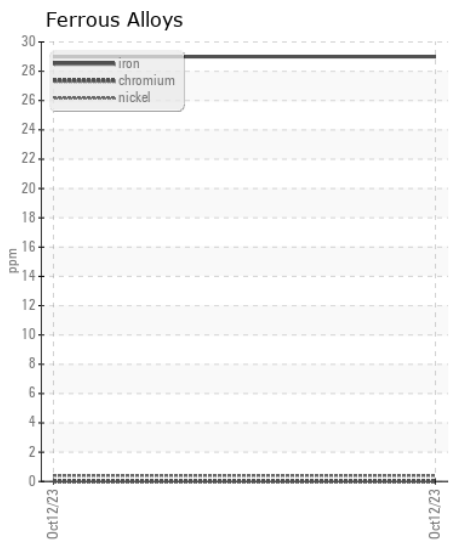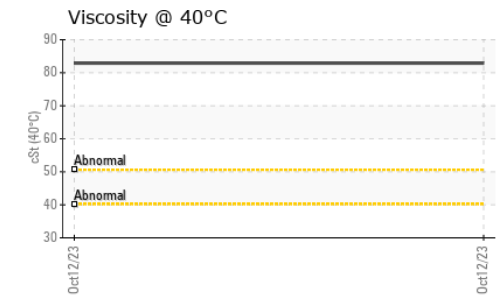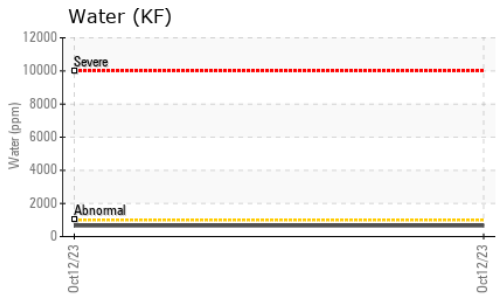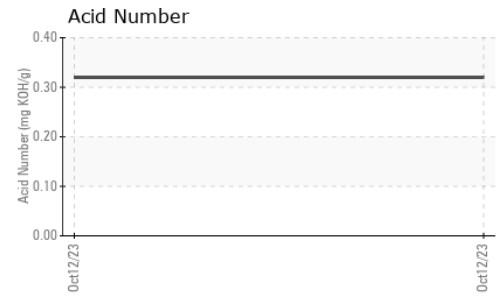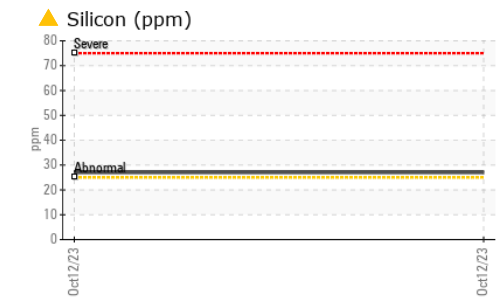

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN37417
Lab Number : 05985635
Unique Number : 10702930
Test Package : IND 2
Received : 20 Oct 2023
Tested : 24 Oct 2023
Diagnosed : 25 Oct 2023 - Angela Borella

MATTEI COMPRESSORS--OEM
 9635 LIBERTY ROAD, SUITE E
 RANDALLSTOWN, MD
 US 21133
 Contact: MARTY WARD
 jward@matteicomp.com
 T: (410)521-7020
 F: (410)521-7024

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)