



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[16W14764]
 Machine Id
JOHN DEERE 210G 1FF210GXEMF529192
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (36 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W14764)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0185396	JR0153643	JR0121839
Sample Date		Client Info		19 Oct 2023	06 Dec 2022	01 Apr 2022
Machine Age	hrs	Client Info		2538	2061	1058
Oil Age	hrs	Client Info		538	2061	1058
Filter Age	hrs	Client Info		477	1003	1058
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	13	2	18
Iron	ppm	ASTM D5185m	>32	3	2	0
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	<1	0	<1
Lead	ppm	ASTM D5185m	>28	<1	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	1
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	58778	31164	6617
Particles >6µm		ASTM D7647	>20000	2531	3128	333
Particles >14µm		ASTM D7647	>640	20	19	18
Particles >21µm		ASTM D7647	>160	5	2	7
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/19/11	22/19/11	20/16/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	0	0
Boron	ppm	ASTM D5185m		0	2	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	2	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		2	11	3
Calcium	ppm	ASTM D5185m		5	11	8
Phosphorus	ppm	ASTM D5185m	827	479	439	508
Zinc	ppm	ASTM D5185m	0	0	5	24
Sulfur	ppm	ASTM D5185m	13	64	0	108
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.20	0.24	0.18
Visc @ 40°C	cSt	ASTM D445	47	47.1	46.8	47.0

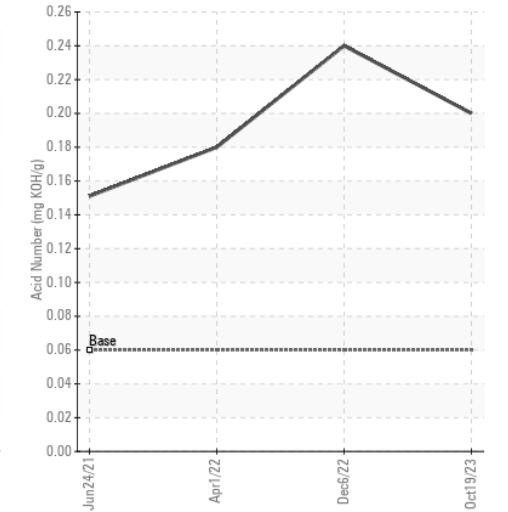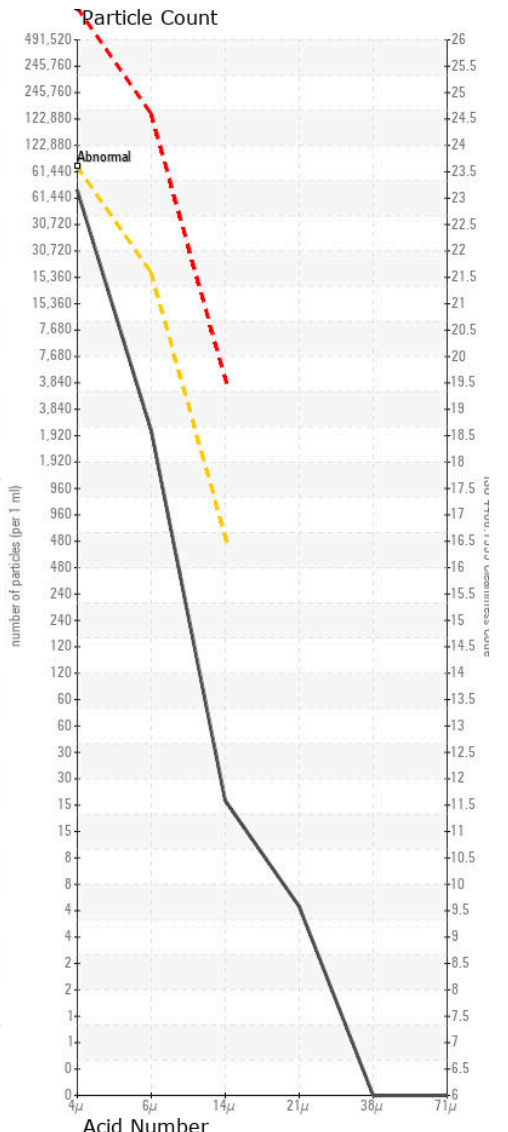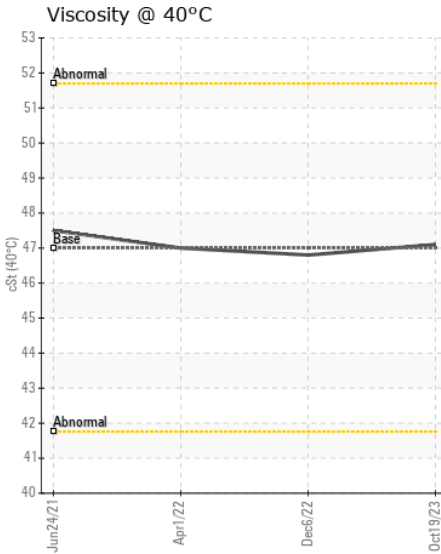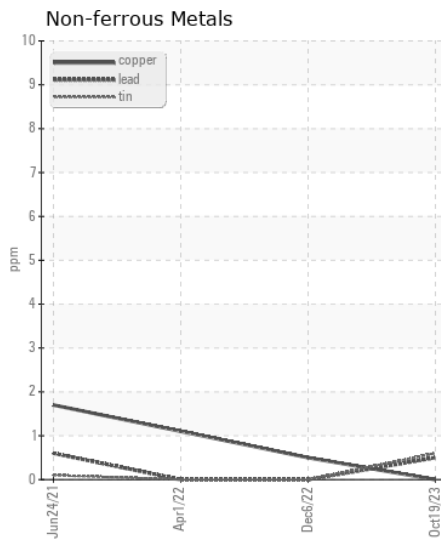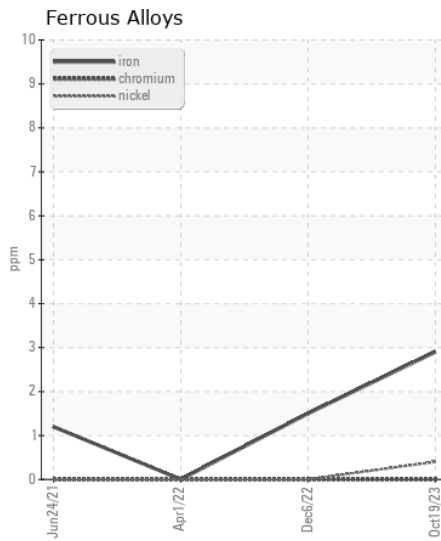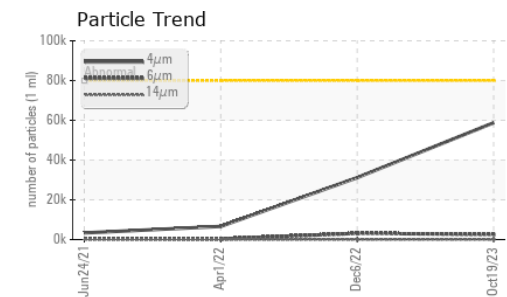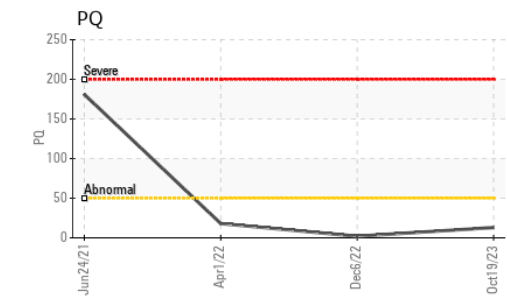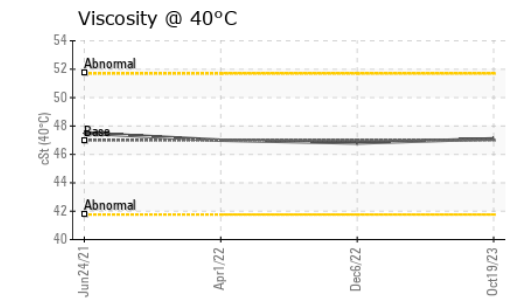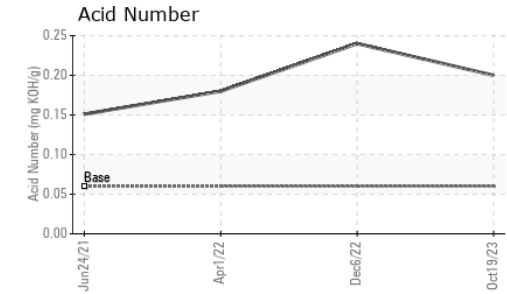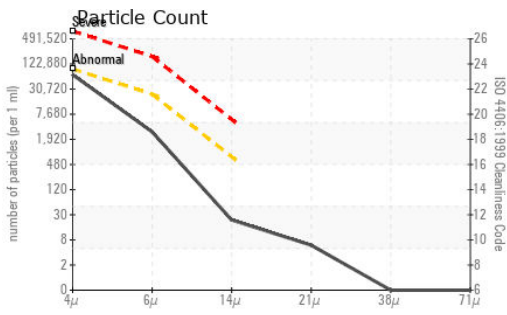

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0185396 **Received** : 23 Oct 2023
Lab Number : 05986352 **Tested** : 24 Oct 2023
Unique Number : 10709014 **Diagnosed** : 25 Oct 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: WILMINGTON SHOP
 todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (910)675-9211

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: