



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[16W14764]
 Machine Id
JOHN DEERE 210G 1FF210GXEMF529192
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W14764)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0185399	JR0153640	JR0121841
Sample Date		Client Info		19 Oct 2023	06 Dec 2022	01 Apr 2022
Machine Age	hrs	Client Info		2538	2061	1058
Oil Age	hrs	Client Info		477	2061	1058
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	111	173	173
Iron	ppm	ASTM D5185m	>750	157	312	282
Chromium	ppm	ASTM D5185m	>9	2	5	5
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	2	2	2
Lead	ppm	ASTM D5185m	>15	<1	0	0
Copper	ppm	ASTM D5185m	>40	<1	<1	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	MODER	MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	15	26	23
Potassium	ppm	ASTM D5185m	>20	4	0	4
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	0
Boron	ppm	ASTM D5185m		15	46	61
Barium	ppm	ASTM D5185m		12	7	0
Molybdenum	ppm	ASTM D5185m		3	<1	2
Manganese	ppm	ASTM D5185m		3	6	5
Magnesium	ppm	ASTM D5185m		14	0	1
Calcium	ppm	ASTM D5185m		22	17	84
Phosphorus	ppm	ASTM D5185m		380	509	528
Zinc	ppm	ASTM D5185m		17	32	36
Sulfur	ppm	ASTM D5185m		22053	16599	12103
Visc @ 40°C	cSt	ASTM D445		145	184	184

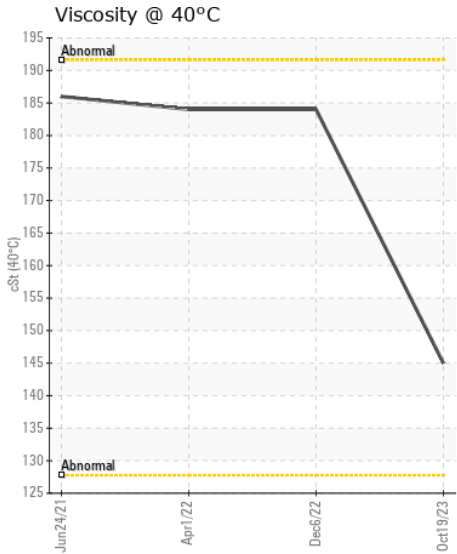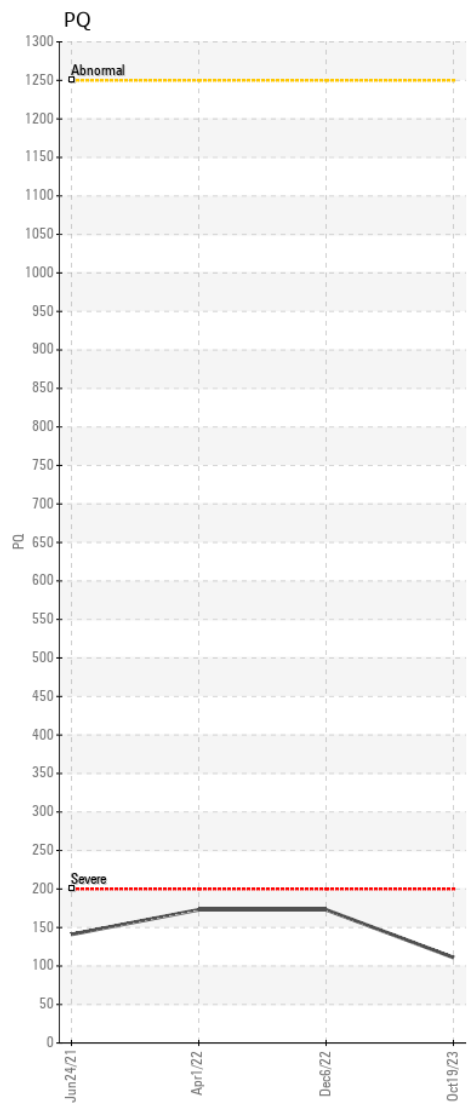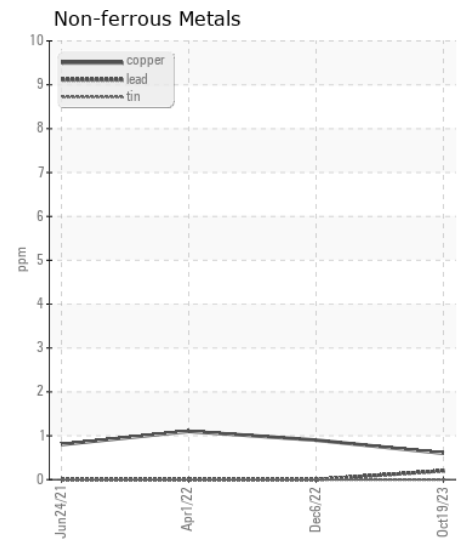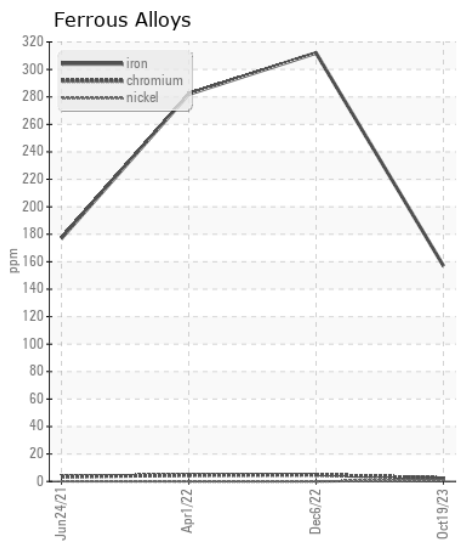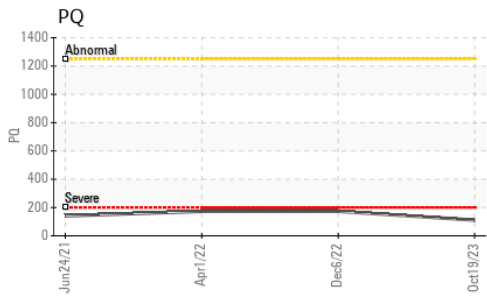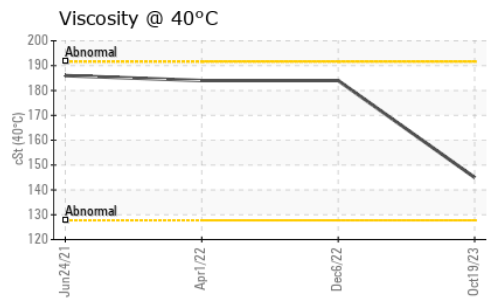

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0185399 **Received** : 23 Oct 2023
Lab Number : 05986847 **Tested** : 24 Oct 2023
Unique Number : 10709509 **Diagnosed** : 25 Oct 2023 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819
 Contact: WILMINGTON SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (910)675-9211

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: