



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta
Machine Id
JOHN DEERE 210G 1FF210GXKNF530270
Component
Right Propel Gearbox
Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0045426	LEC0042301	---
Sample Date		Client Info		16 Oct 2023	19 Jun 2023	---
Machine Age	hrs	Client Info		906	340	---
Oil Age	hrs	Client Info		566	340	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		99	140	---
Iron	ppm	ASTM D5185m	>1250	244	166	---
Chromium	ppm	ASTM D5185m	>10	5	4	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		1	2	---
Lead	ppm	ASTM D5185m		<1	0	---
Copper	ppm	ASTM D5185m		2	1	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		19	16	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	---
Boron	ppm	ASTM D5185m	6	37	68	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	0	3	<1	---
Manganese	ppm	ASTM D5185m		5	5	---
Magnesium	ppm	ASTM D5185m	145	93	<1	---
Calcium	ppm	ASTM D5185m	3570	2707	41	---
Phosphorus	ppm	ASTM D5185m	1290	907	516	---
Zinc	ppm	ASTM D5185m	1640	1026	16	---
Sulfur	ppm	ASTM D5185m		5996	18107	---
Visc @ 40°C	cSt	ASTM D445	57.0	67.8	185	---

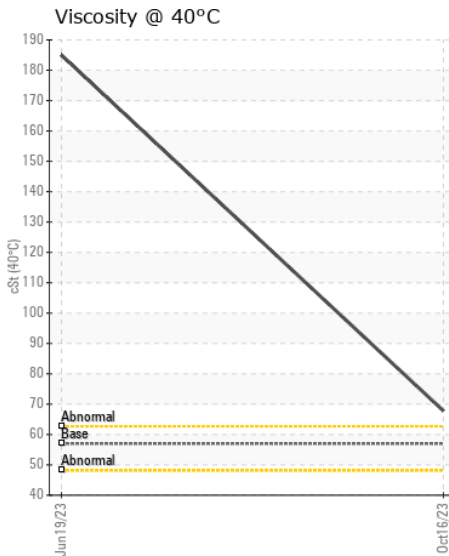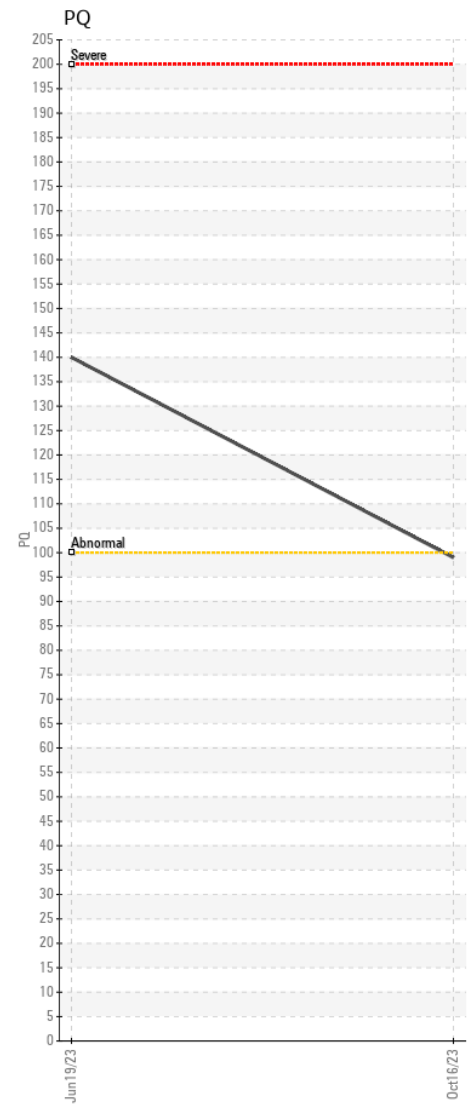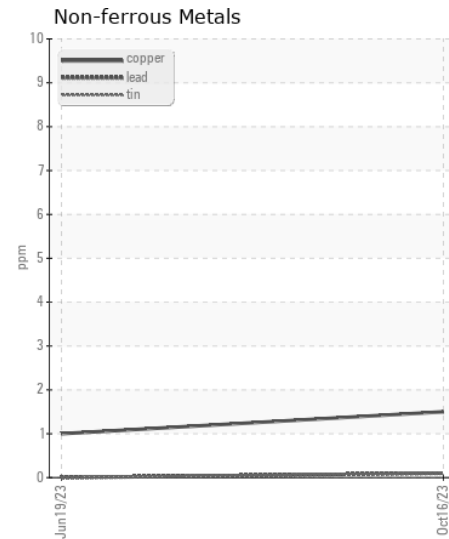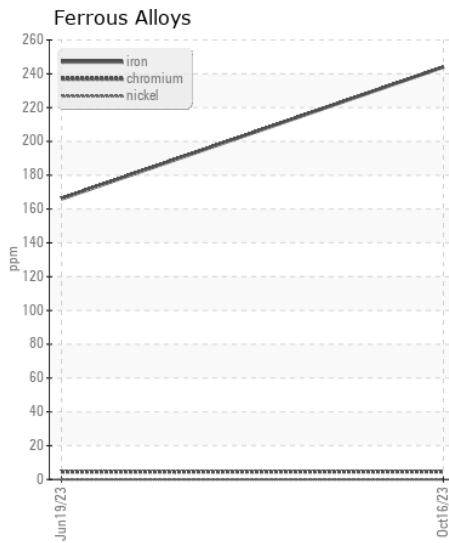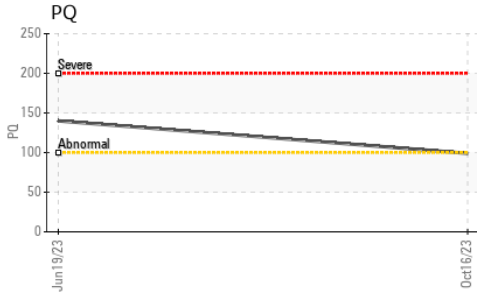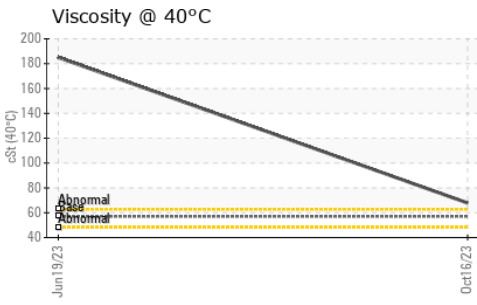

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0045426 **Received** : 24 Oct 2023
Lab Number : 05988382 **Tested** : 26 Oct 2023
Unique Number : 10711044 **Diagnosed** : 26 Oct 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570