



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MERCURY JW-GM

Component
Gasoline Engine

Fluid
TRC PRO-SPEC SYNTHETIC 5W20 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05989914	---	---
Sample Date		Client Info		21 Oct 2023	---	---
Machine Age	mls	Client Info		153381	---	---
Oil Age	mls	Client Info		5026	---	---
Filter Age	mls	Client Info		5026	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	12	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	7	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	2	---	---
Boron	ppm	ASTM D5185m		33	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m	400	162	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	600	480	---	---
Calcium	ppm	ASTM D5185m	1500	1352	---	---
Phosphorus	ppm	ASTM D5185m	800	608	---	---
Zinc	ppm	ASTM D5185m	900	917	---	---
Sulfur	ppm	ASTM D5185m		2081	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.24	---	---
Visc @ 100°C	cSt	ASTM D445	8.5	8.6	---	---

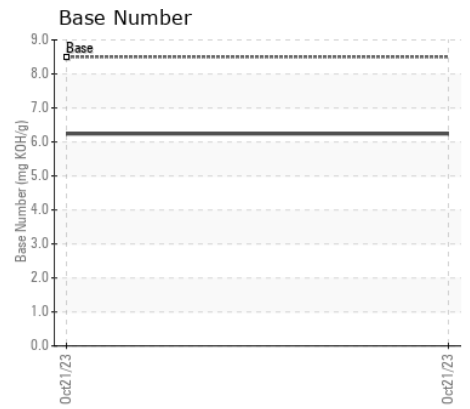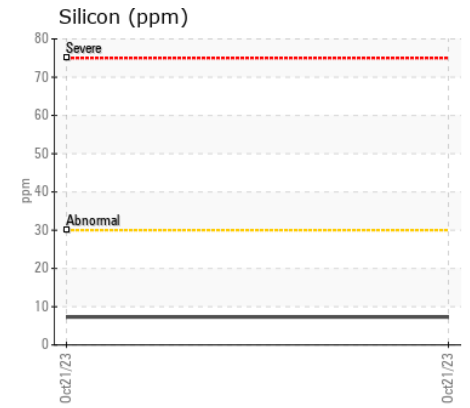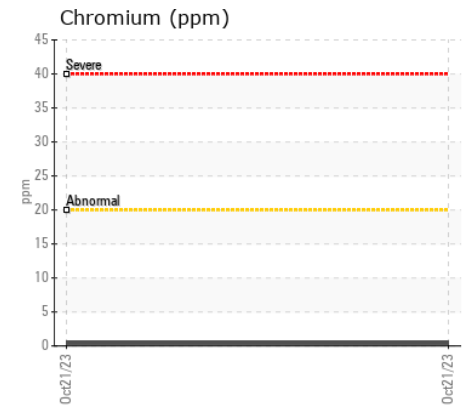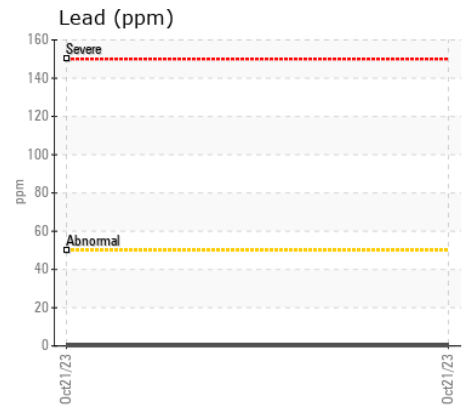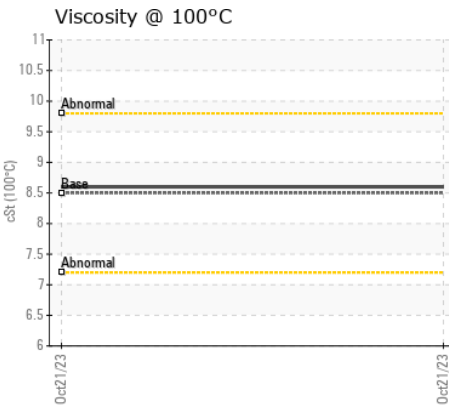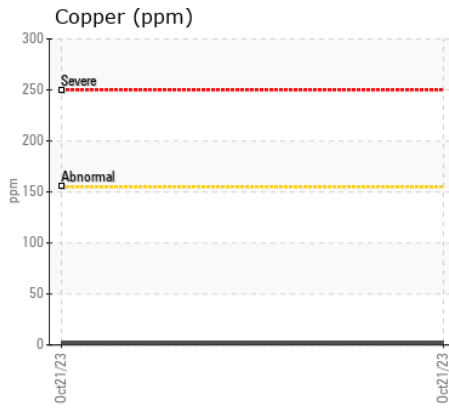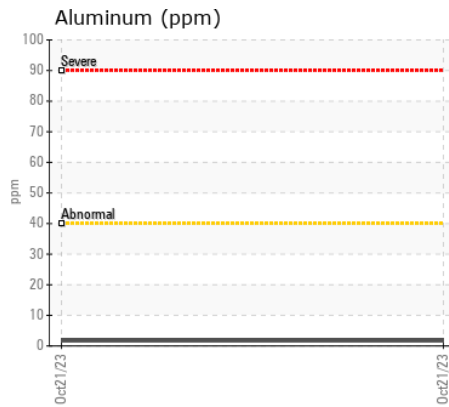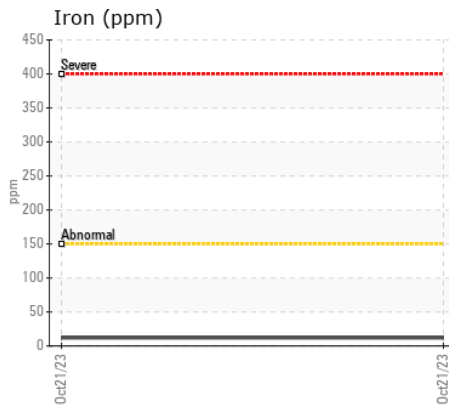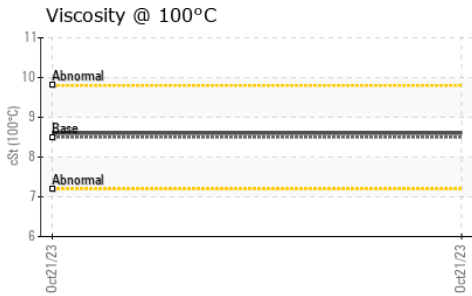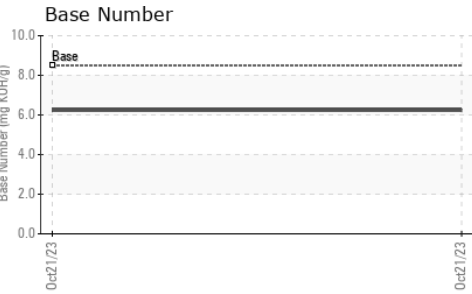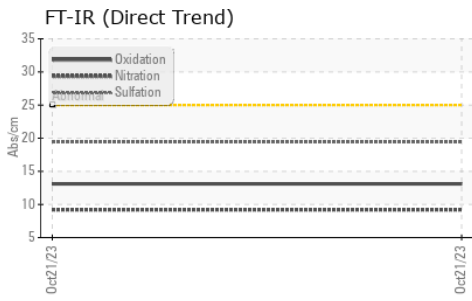

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05989914
Lab Number : 05989914
Unique Number : 10712576
Test Package : MOB 2
Received : 25 Oct 2023
Tested : 26 Oct 2023
Diagnosed : 26 Oct 2023 - Wes Davis

JIM WHITLOW
P.O. BOX 366
HAW RIVER, NC
US 27258

Contact: JIM WHITLOW
JWHITLOW45@YAHOO.COM
T: (336)421-8700
F: (336)421-0527

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)