



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**LINK-BELT OUTER HYDROFLEX**

Component  
**Gearbox**

Fluid  
**PETRO CANADA PURITY FG SYNTH EP GEAR FLUID 460 (3 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0055860</b>	PCA0055874	PCA127644
Sample Date		Client Info		<b>26 Oct 2023</b>	15 Mar 2022	08 Feb 2020
Machine Age	mths	Client Info		<b>12</b>	36	5
Oil Age	mths	Client Info		<b>12</b>	12	5
Filter Age	mths	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>12</b>	11	4
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>200	<b>6</b>	5	2
Tin	ppm	ASTM D5185m	>25	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>37</b>	42	14
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>3</b>	3	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	600	<b>578</b>	530	540
Zinc	ppm	ASTM D5185m	0	<b>3</b>	14	7
Sulfur	ppm	ASTM D5185m	500	<b>631</b>	482	542
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.48</b>	0.85	0.584
Visc @ 40°C	cSt	ASTM D445	440	<b>436</b>	439	445

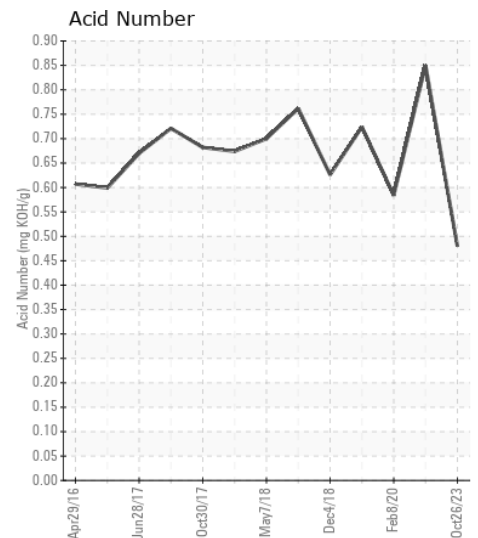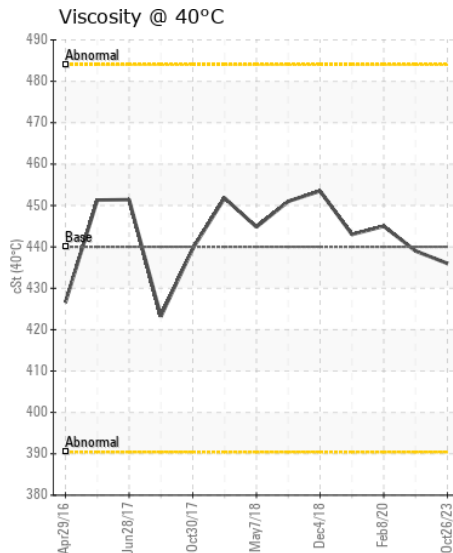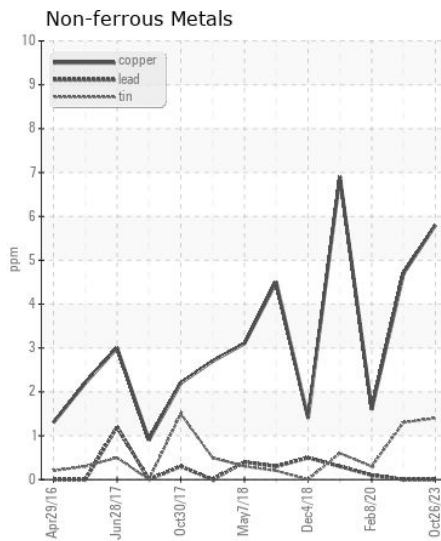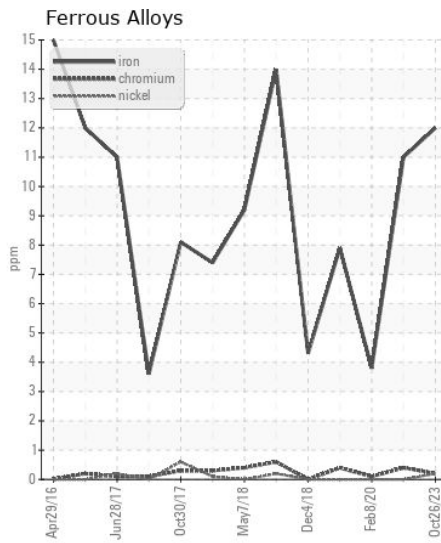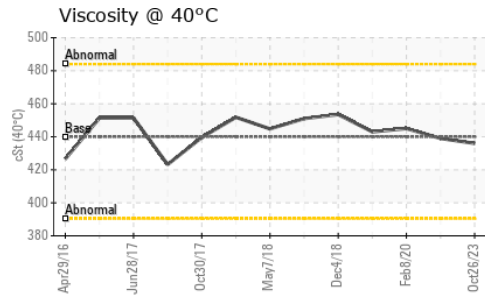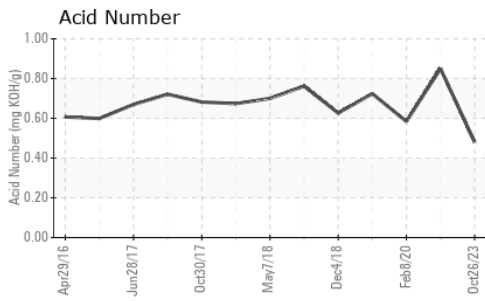

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0055860  
**Lab Number** : 05991748  
**Unique Number** : 10714410  
**Test Package** : IND 2

**Received** : 27 Oct 2023  
**Tested** : 30 Oct 2023  
**Diagnosed** : 30 Oct 2023 - Wes Davis

**NESTLE PURINA PET CARE - CRETE**  
 2305 E HIGHWAY 33  
 CRETE, NE  
 US 68333

Contact: SHAWN HINRICHS  
 shawn.hinrichs@purina.nestle.com  
 T: (402)826-8790

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: