



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 9 - Marietta**  
Machine Id  
**JOHN DEERE 850L 1T0850LXHKF365119**  
Component  
**Left Inner Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0045554</b>	LEC0037514	LEC0021207
Sample Date		Client Info		<b>26 Oct 2023</b>	18 Jan 2023	24 May 2021
Machine Age	hrs	Client Info		<b>1524</b>	980	398
Oil Age	hrs	Client Info		<b>544</b>	980	398
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>None</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>48</b>	62	41
Iron	ppm	ASTM D5185m	>750	<b>81</b>	101	53
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m	>15	<b>0</b>	3	1
Copper	ppm	ASTM D5185m	>40	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	6	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>2</b>	2	0
Boron	ppm	ASTM D5185m	6	<b>11</b>	<1	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	11	0
Molybdenum	ppm	ASTM D5185m	0	<b>8</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Magnesium	ppm	ASTM D5185m	145	<b>110</b>	94	100
Calcium	ppm	ASTM D5185m	3570	<b>3092</b>	3097	3597
Phosphorus	ppm	ASTM D5185m	1290	<b>890</b>	873	1016
Zinc	ppm	ASTM D5185m	1640	<b>1131</b>	1105	1241
Sulfur	ppm	ASTM D5185m		<b>3225</b>	3382	2827
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.3</b>	50.9	52.1

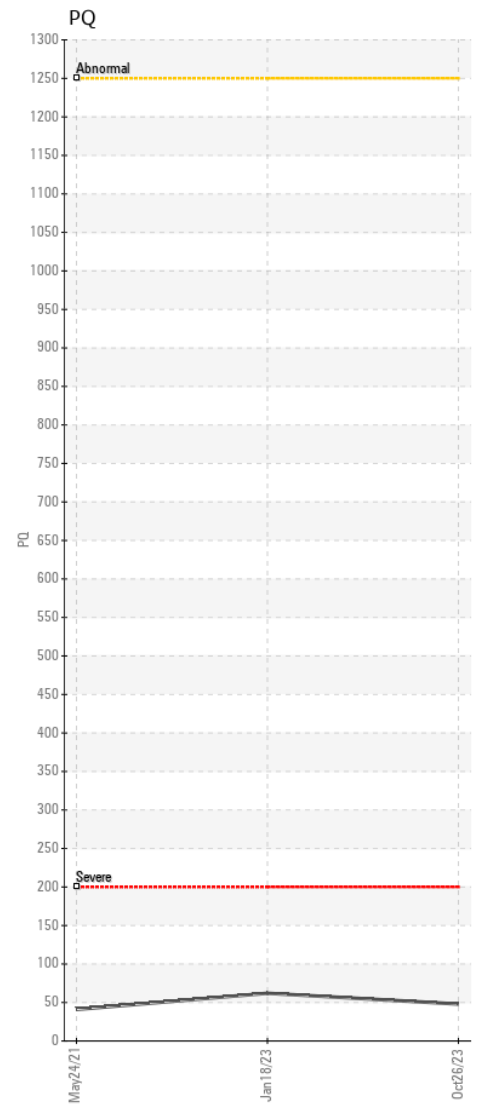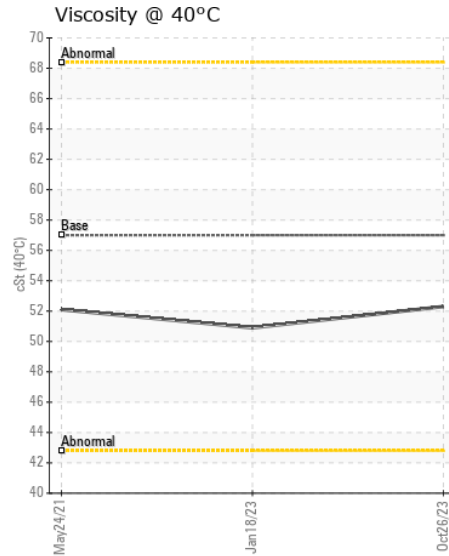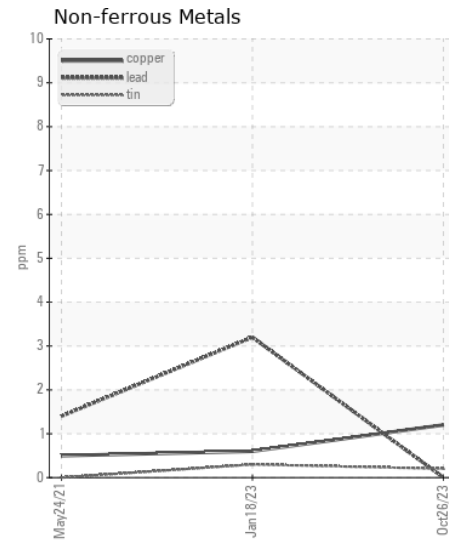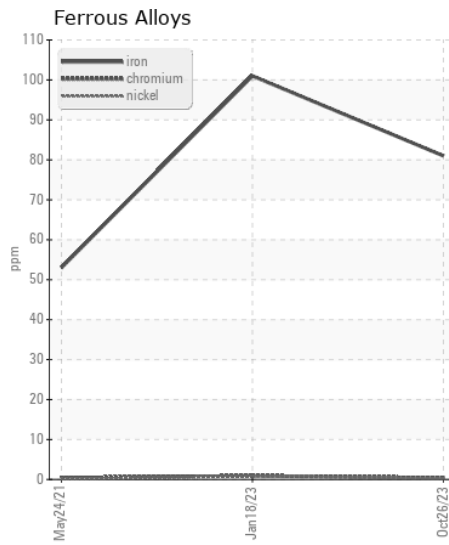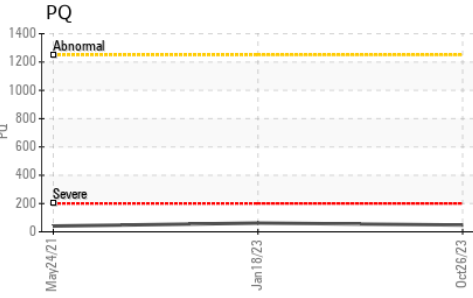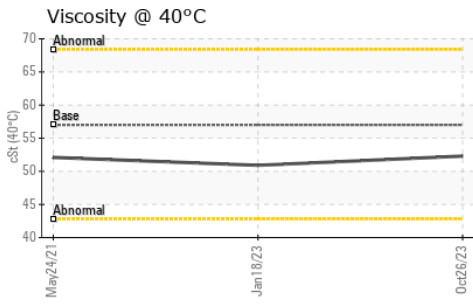

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0045554 **Received** : 31 Oct 2023  
**Lab Number** : 05994589 **Tested** : 01 Nov 2023  
**Unique Number** : 10722949 **Diagnosed** : 01 Nov 2023 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570