



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8464225
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0015842	RPL0013438	---
Sample Date		Client Info		27 Oct 2023	01 Aug 2023	---
Machine Age	mls	Client Info		166043	158663	---
Oil Age	mls	Client Info		16508	9128	---
Filter Age	mls	Client Info		16508	9128	---
Oil Changed		Client Info		Not Changd	Filtered	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	6	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	<1	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	2	2	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	---
Potassium	ppm	ASTM D5185m	>20	8	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	18.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	---
Boron	ppm	ASTM D5185m	0	1	3	---
Barium	ppm	ASTM D5185m	0	0	2	---
Molybdenum	ppm	ASTM D5185m	0	56	78	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	0	866	1183	---
Calcium	ppm	ASTM D5185m		1131	1595	---
Phosphorus	ppm	ASTM D5185m		926	1382	---
Zinc	ppm	ASTM D5185m		1175	1619	---
Sulfur	ppm	ASTM D5185m		3074	4159	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.4	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.7	8.5	---
Visc @ 100°C	cSt	ASTM D445	14	14.3	14.3	---

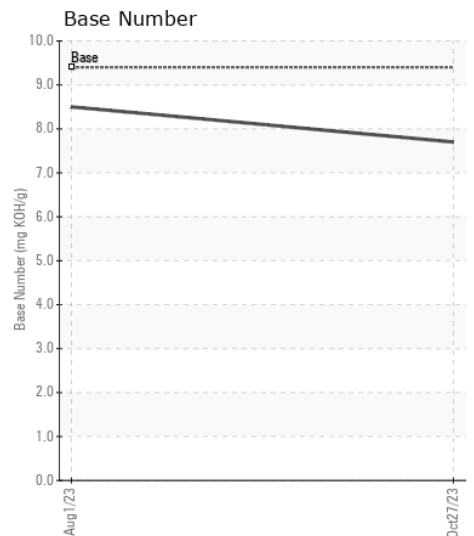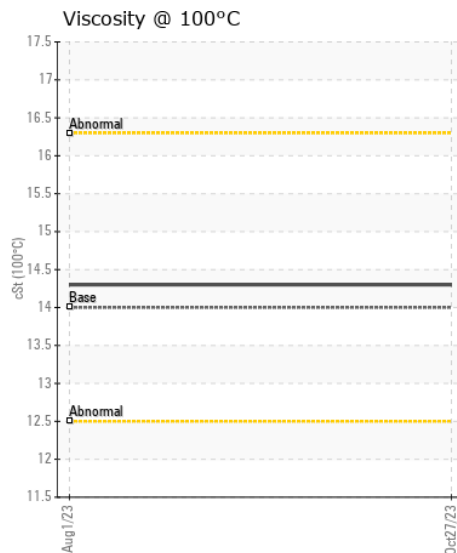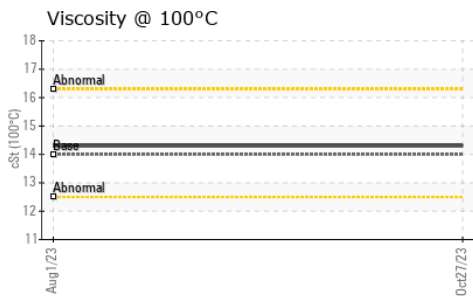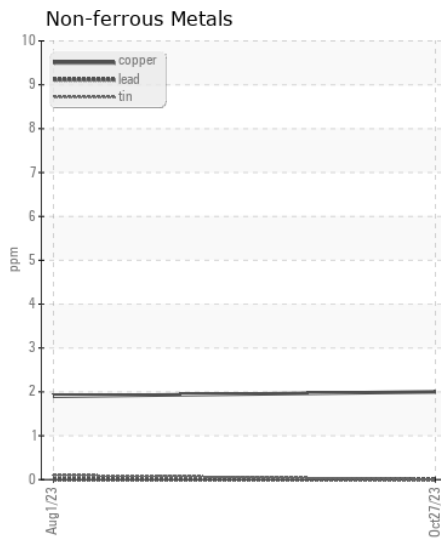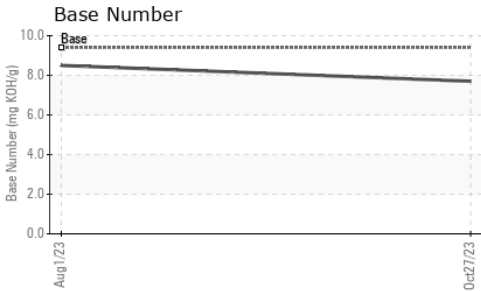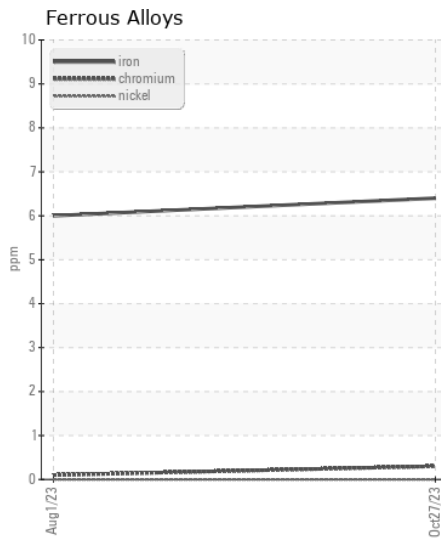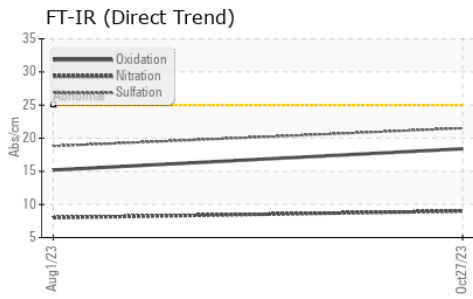

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0015842
Lab Number : 06001211
Unique Number : 10729571
Test Package : FLEET
Received : 08 Nov 2023
Tested : 04 Jun 2024
Diagnosed : 04 Jun 2024 - Wes Davis

RTL PACLEASE - 7001 - Houston
 6300 N. Loop East
 Houston, TX
 US 77026
 Contact: RODNEY BRIGGS
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)