



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 944k 1DW944KSKLF703589**  
Component  
**Gear Case**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (9 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0031578</b>	LEC0043044	LEC0038503
Sample Date		Client Info		<b>13 Nov 2023</b>	17 Aug 2023	09 May 2023
Machine Age	hrs	Client Info		<b>4978</b>	4471	4005
Oil Age	hrs	Client Info		<b>507</b>	466	4005
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>7</b>	11	10
Iron	ppm	ASTM D5185m	>200	<b>3</b>	5	4
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>5	<b>1</b>	<1	4
Lead	ppm	ASTM D5185m	>5	<b>2</b>	<1	2
Copper	ppm	ASTM D5185m	>15	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	<b>5</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	2	2
Boron	ppm	ASTM D5185m	6	<b>2</b>	4	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>104</b>	104	96
Calcium	ppm	ASTM D5185m	3570	<b>3576</b>	3737	3457
Phosphorus	ppm	ASTM D5185m	1290	<b>1122</b>	1093	1013
Zinc	ppm	ASTM D5185m	1640	<b>1365</b>	1346	1273
Sulfur	ppm	ASTM D5185m		<b>3915</b>	4655	4239
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.2</b>	51.1	50.2

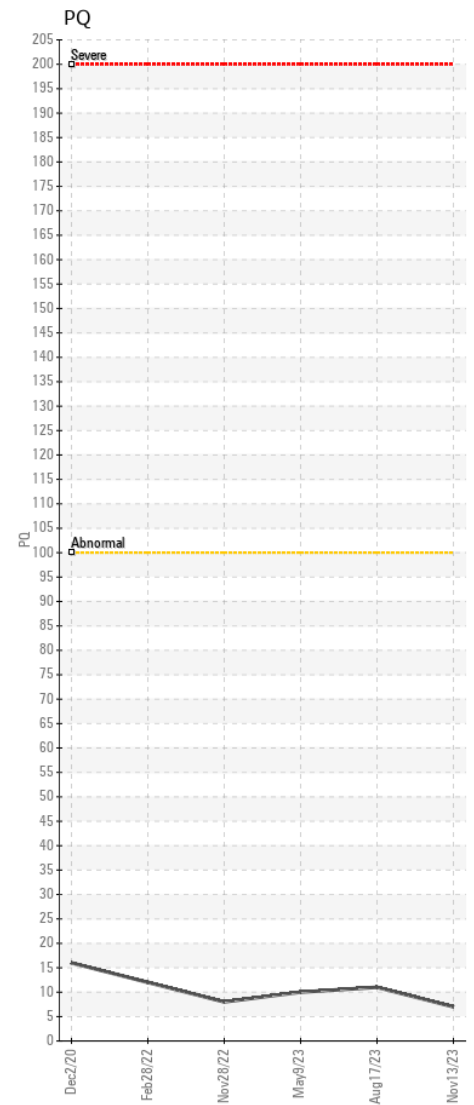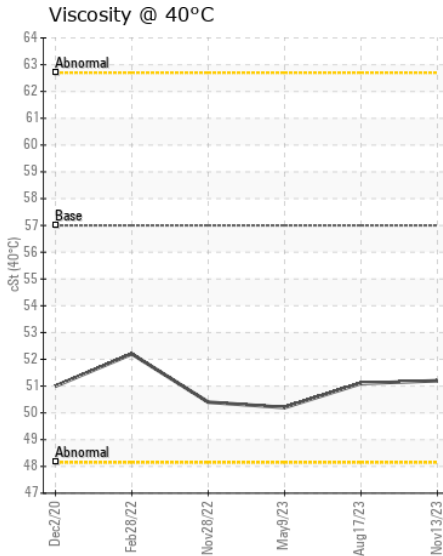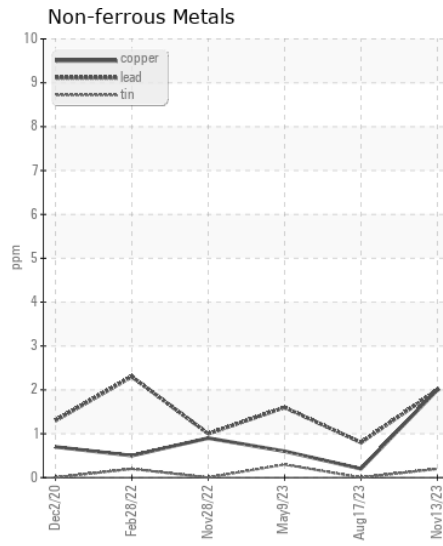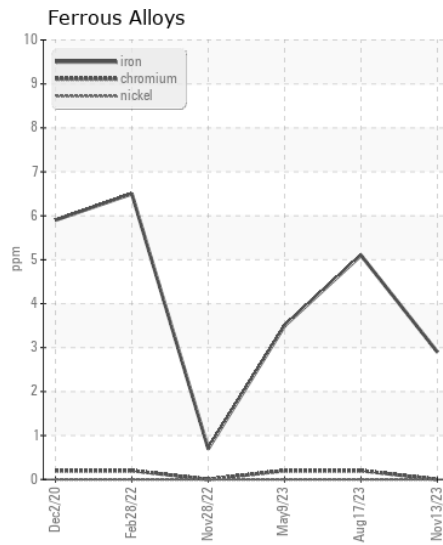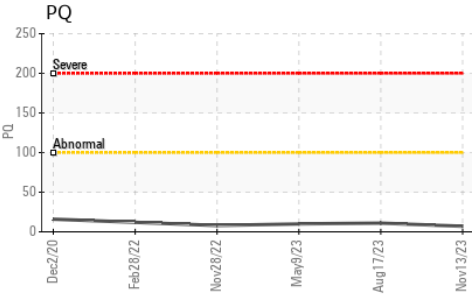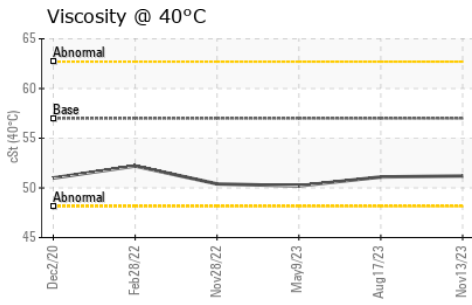

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0031578 **Received** : 15 Nov 2023  
**Lab Number** : 06008664 **Tested** : 16 Nov 2023  
**Unique Number** : 10742426 **Diagnosed** : 17 Nov 2023 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**APPALACHIAN AGGREGATES**  
 2950 CHARLES AVENUE  
 DUNBAR, WV  
 US 25064  
 Contact: VERNON SPARKS  
 vernon.sparks@appagg.wv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: