



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 990 LOADER G 6427 (S/N BCR00127)

Component
Steering

Fluid
TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10002877	TO10002396	TO10001756
Sample Date		Client Info		13 Nov 2023	18 Jul 2023	27 Mar 2023
Machine Age	hrs	Client Info		48135	47549	46544
Oil Age	hrs	Client Info		2587	2001	1500
Filter Age	hrs	Client Info		586	501	504
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Not Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>60	2	2	2
Chromium	ppm	ASTM D5185m	>12	1	<1	<1
Nickel	ppm	ASTM D5185m	>6	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>4	<1	<1	<1
Lead	ppm	ASTM D5185m	>12	0	0	0
Copper	ppm	ASTM D5185m	>30	2	1	<1
Tin	ppm	ASTM D5185m		<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Silicon	ppm	ASTM D5185m	>10	2	<1	2
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method		NEG	NEG	NEG
Particles >4µm		ASTM D7647	>2500	▲ 6758	622	1135
Particles >6µm		ASTM D7647	>640	▲ 1353	149	365
Particles >14µm		ASTM D7647	>80	50	9	23
Particles >21µm		ASTM D7647	>20	7	3	4
Particles >38µm		ASTM D7647	>4	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	▲ 20/18/13	16/14/10	17/16/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		31	115	101
Calcium	ppm	ASTM D5185m		70	133	121
Phosphorus	ppm	ASTM D5185m		804	964	882
Zinc	ppm	ASTM D5185m		1107	1280	1148
Sulfur	ppm	ASTM D5185m		2861	4288	3851
Acid Number (AN)	mg KOH/g	ASTM D8045		0.75	1.07	0.98
Visc @ 40°C	cSt	ASTM D445		47.1	46.9	47.0
Visc @ 100°C	cSt	ASTM D445		7	7.09	7.1
Viscosity Index (VI)	Scale	ASTM D2270		105	109	109

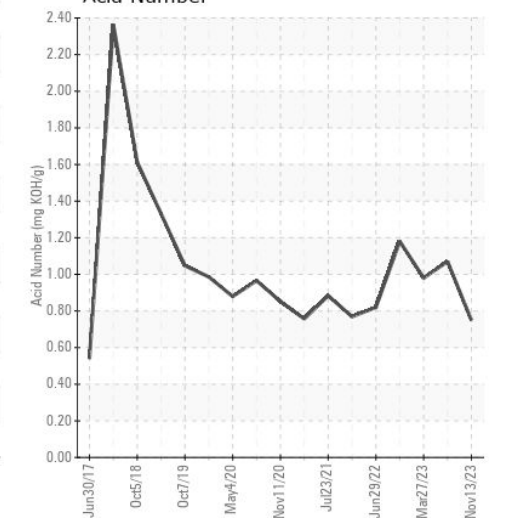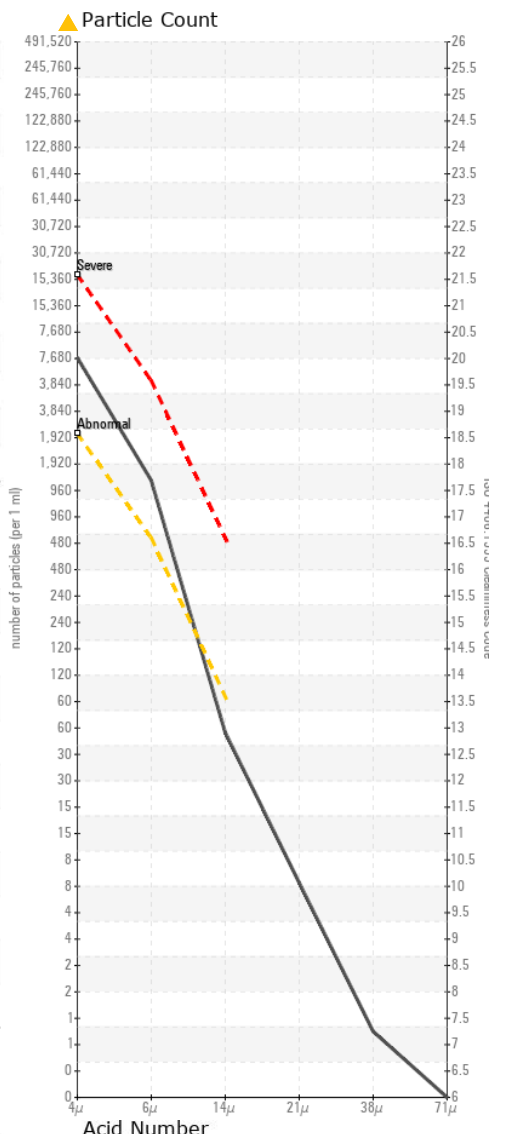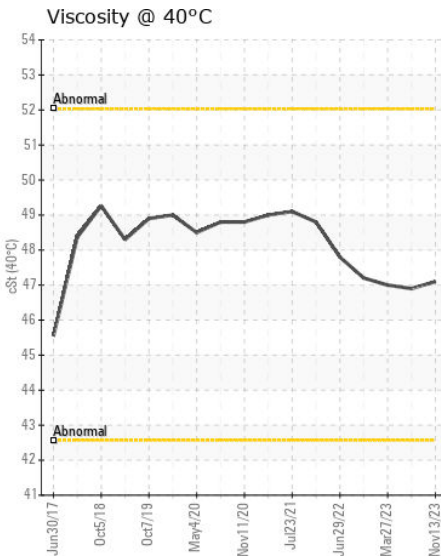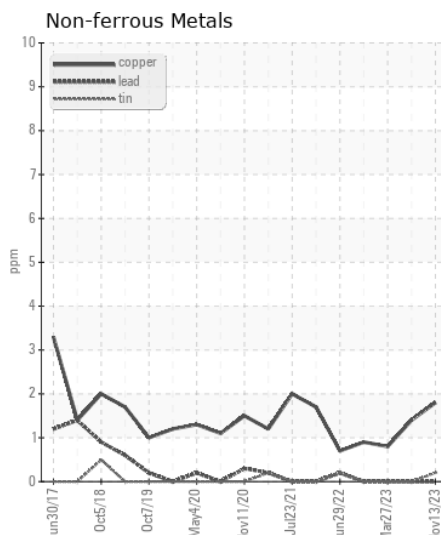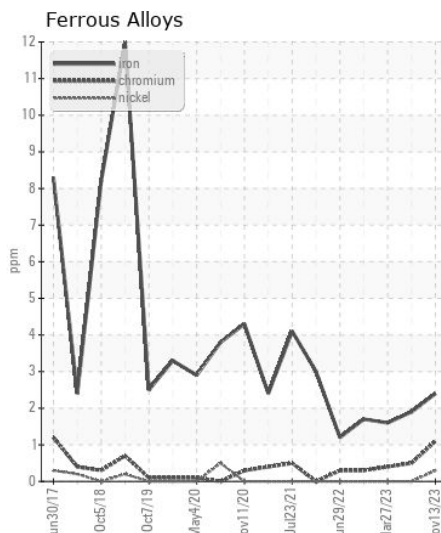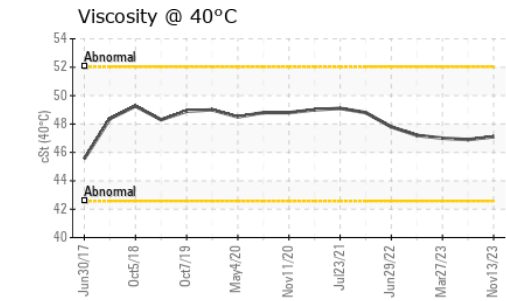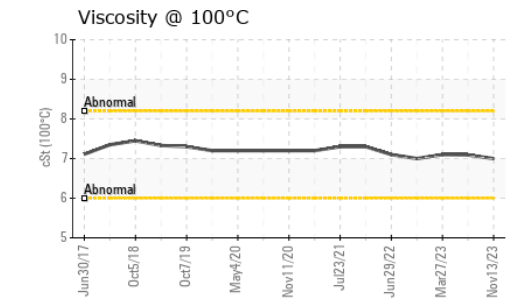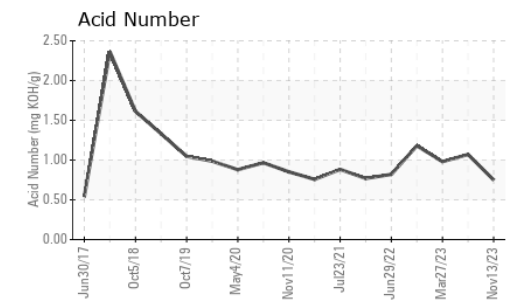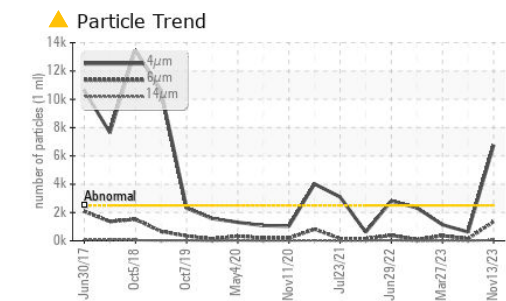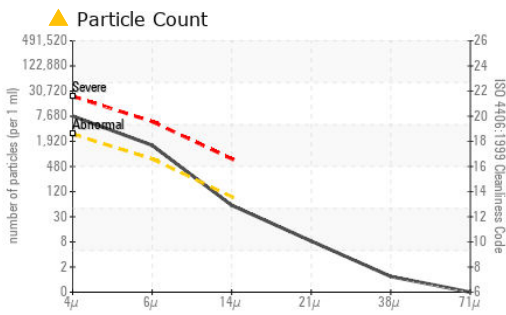

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002877 **Received** : 17 Nov 2023
Lab Number : 06011485 **Tested** : 20 Nov 2023
Unique Number : 10750629 **Diagnosed** : 21 Nov 2023 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, PrtCount, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)