



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BOBSP 7303
 Component
Gearbox
 Fluid
MOBIL MOBILGEAR 600 XP ISO 150 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PTK0000292	PTK0000303	PTK0001175
Sample Date		Client Info		09 Nov 2023	13 Jun 2023	23 Nov 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	2	4	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	<1	0	1
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647		807	3181	707
Particles >6µm		ASTM D7647	>5000	232	831	160
Particles >14µm		ASTM D7647	>640	18	75	17
Particles >21µm		ASTM D7647	>160	5	21	6
Particles >38µm		ASTM D7647	>40	0	1	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/16	15/11	17/13	14/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		1	2	1
Phosphorus	ppm	ASTM D5185m		289	291	300
Zinc	ppm	ASTM D5185m		4	3	1
Sulfur	ppm	ASTM D5185m		15207	16650	14843
Acid Number (AN)	mg KOH/g	ASTM D8045		0.64	0.71	0.65
Visc @ 40°C	cSt	ASTM D445	150	156	154	152

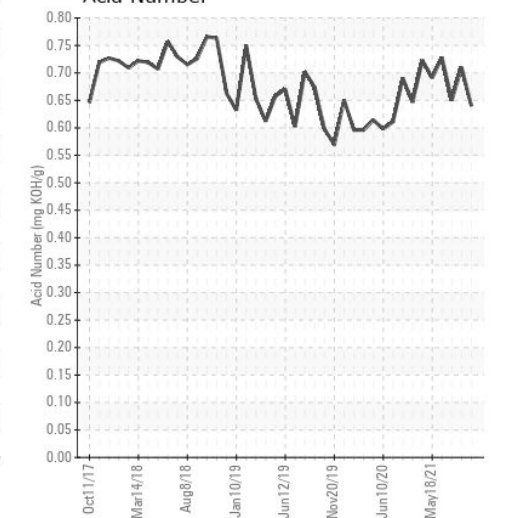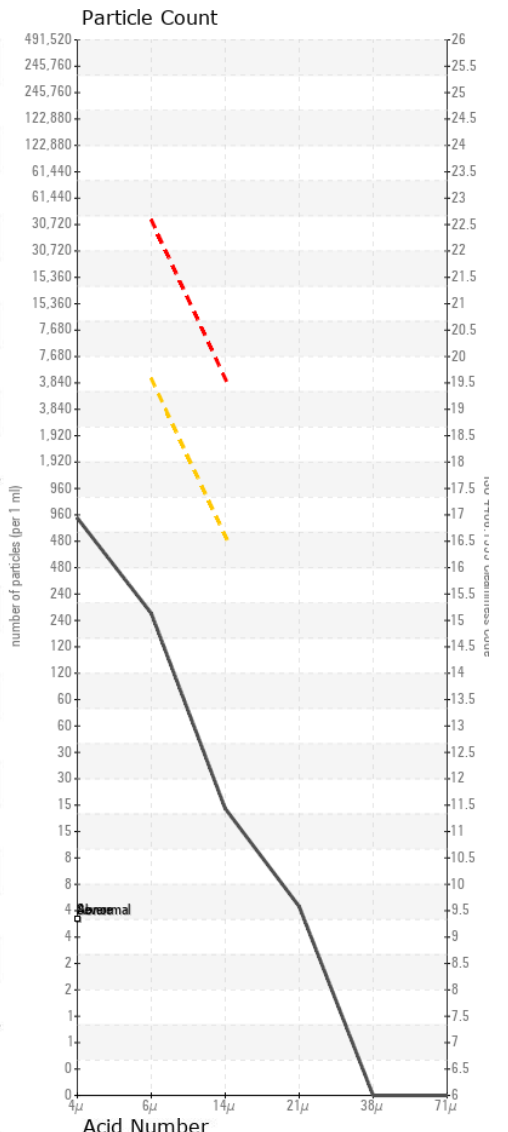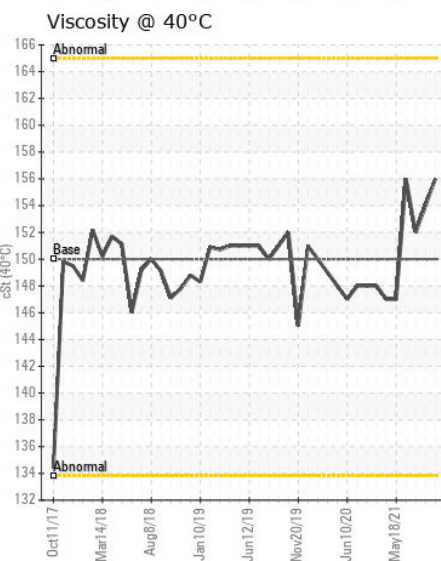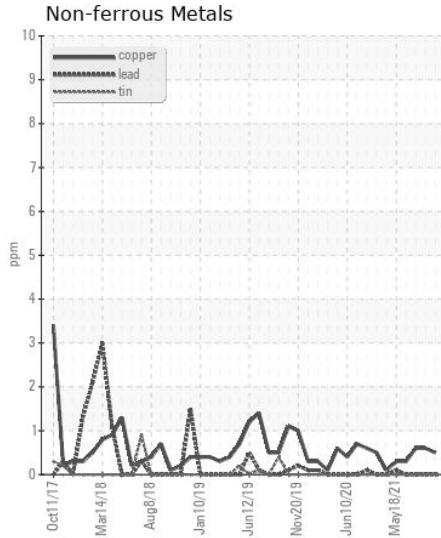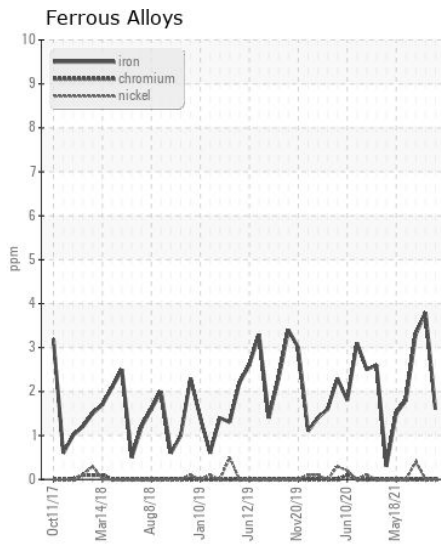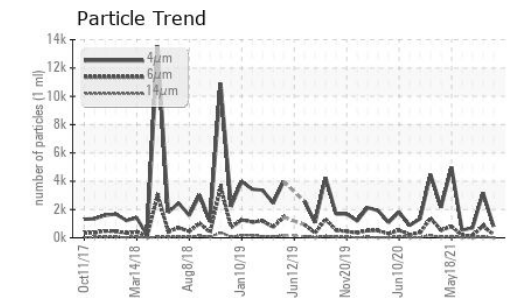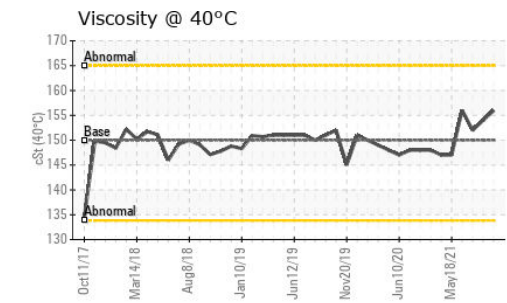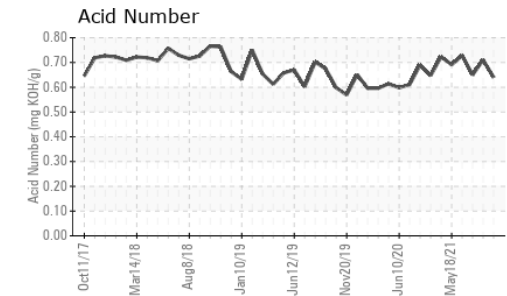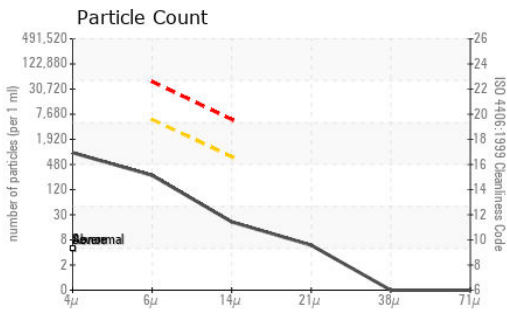

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0000292 **Received** : 24 Nov 2023
Lab Number : 06017319 **Tested** : 28 Nov 2023
Unique Number : 10756463 **Diagnosed** : 28 Nov 2023 - Wes Davis
Test Package : MOB 2 (Additional Tests: PrtCount)

GRAPHIC PACKAGING
 1500 NICHOLAS BLVD
 ELK GROVE, IL
 US 60017
 Contact: TONY HILDY
 anthonyhildy@graphicpkg.com
 T: (847)437-1700
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)