



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**KANSAS/44**  
Machine Id  
**45.61L [KANSAS^44]**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (6 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0833945</b>	WC0712200	WC0639986
Sample Date		Client Info		<b>30 Nov 2023</b>	23 Aug 2022	25 Apr 2022
Machine Age	hrs	Client Info		<b>11911</b>	11181	10934
Oil Age	hrs	Client Info		<b>730</b>	247	10934
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>18</b>	11	23
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>31	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>26	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>7</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	2
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	7.1	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.0</b>	23.4	20.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>1</b>	2	3
Boron	ppm	ASTM D5185m	0	<b>45</b>	50	9
Barium	ppm	ASTM D5185m	0	<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>41</b>	41	59
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>506</b>	537	964
Calcium	ppm	ASTM D5185m		<b>1719</b>	1521	1156
Phosphorus	ppm	ASTM D5185m		<b>746</b>	729	1074
Zinc	ppm	ASTM D5185m		<b>941</b>	922	1271
Sulfur	ppm	ASTM D5185m		<b>2709</b>	2356	2879
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.8</b>	20.9	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.4</b>	11.1	10.2
Visc @ 100°C	cSt	ASTM D445	14	<b>13.3</b>	13.6	14.3

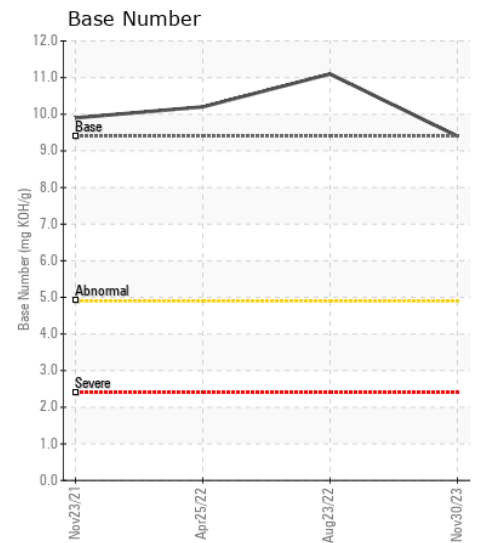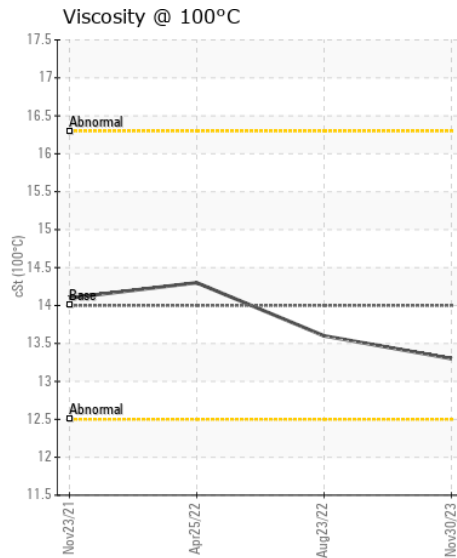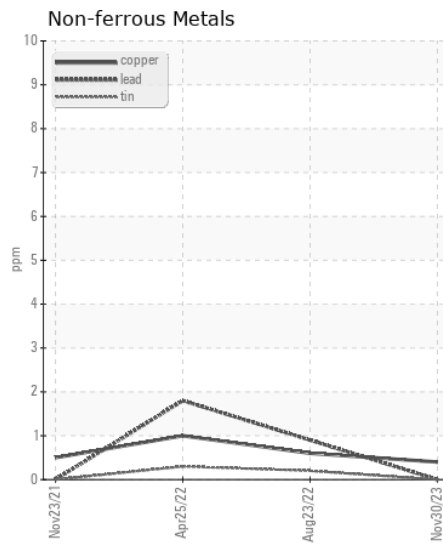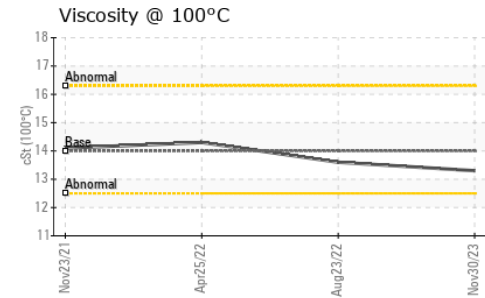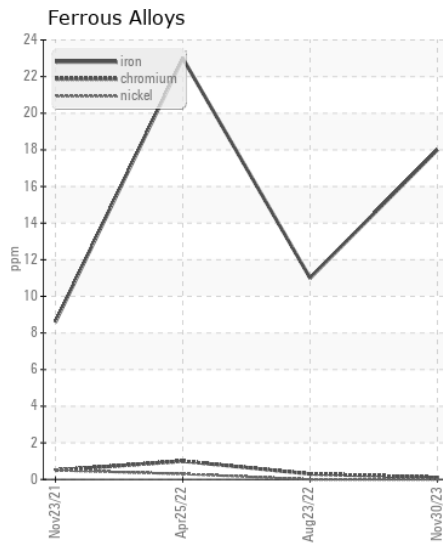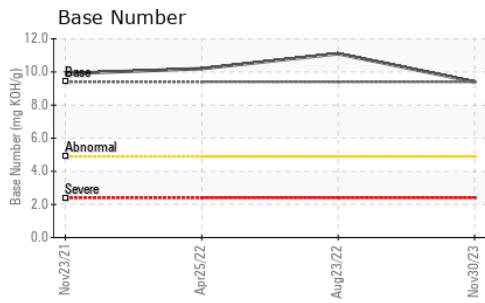

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0833945

**Lab Number** : 06026260

**Unique Number** : 10776051

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 06 Dec 2023

**Tested** : 07 Dec 2023

**Diagnosed** : 07 Dec 2023 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**SHERWOOD CONSTRUCTION CO INC**

3219 WEST MAY ST

WICHITA, KS

US 67213

Contact: RANDY ROBERTS

randy.roberts@sherwood.net

T: (316)943-6491

F: x: