



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
146 (S/N 400046)
 Component
Hydraulic System
 Fluid
DURALENE ZFH 46 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0013527	---	---
Sample Date		Client Info		17 Nov 2023	---	---
Machine Age	hrs	Client Info		8064	---	---
Oil Age	hrs	Client Info		3000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The iron level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	▲ 30	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		46	---	---
Phosphorus	ppm	ASTM D5185m		305	---	---
Zinc	ppm	ASTM D5185m		39	---	---
Sulfur	ppm	ASTM D5185m		3348	---	---
Visc @ 40°C	cSt	ASTM D445		44.2	---	---


▲ Ferrous Alloys

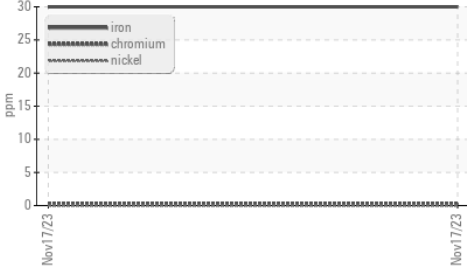


Viscosity @ 40°C

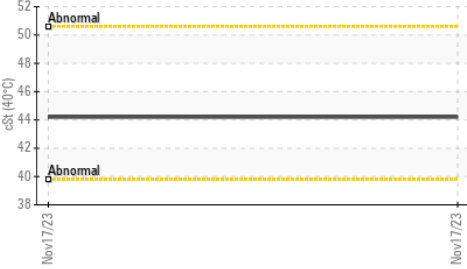


▲ Iron (ppm)

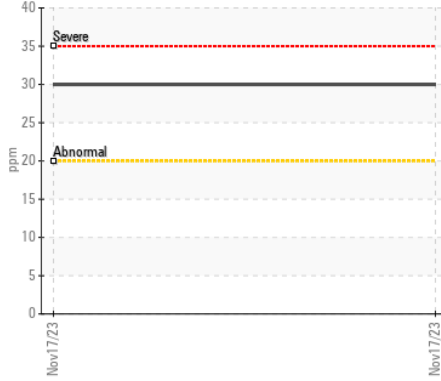


Aluminum (ppm)

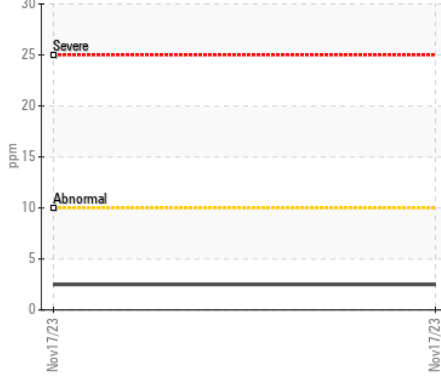


Copper (ppm)

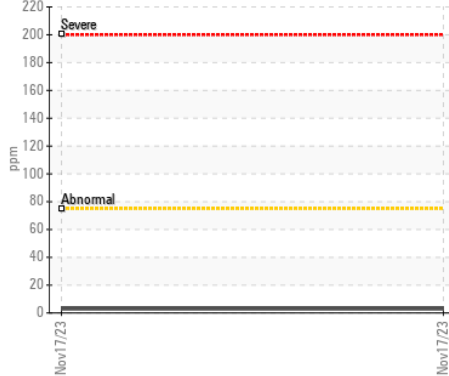


Viscosity @ 40°C

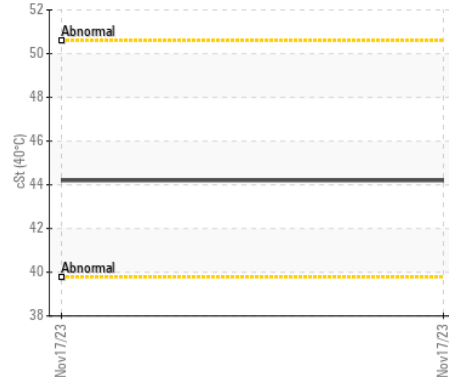


Lead (ppm)

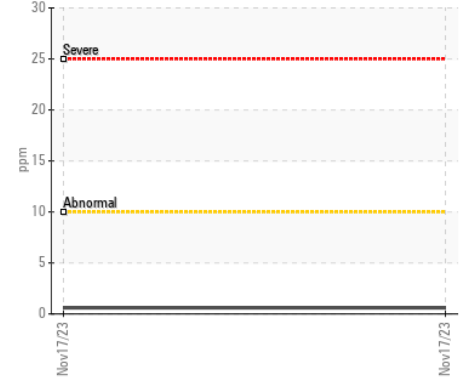


Chromium (ppm)

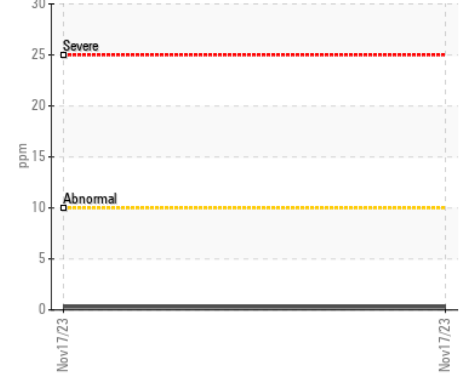

Silicon (ppm)

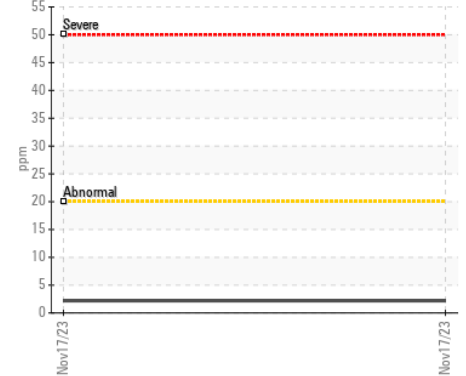

Additives

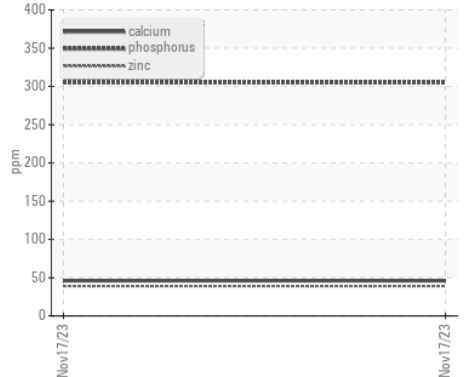

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0013527 **Received** : 06 Dec 2023
Lab Number : 06027263 **Tested** : 08 Dec 2023
Unique Number : 10777054 **Diagnosed** : 08 Dec 2023 - Don Baldrige
Test Package : MOB 1

UTILITIES UNLIMITED INC
 612 WEDEKINO DR
 WOODBINE, MD
 US 21797
 Contact: ANDREW
 andrew@utilitiesunlimitedinc.com
 T: (410)591-7955
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)