



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**5C07**

Machine Id

**FORD F-550 FBK9594 (S/N 1FD0W5GT4GEA85381)**

Component

**Transmission (Auto)**

Fluid

**DEXRON III (16 QTS)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ARI0007349</b>	ARI0005619	ARI0005041
Sample Date		Client Info		<b>02 Nov 2023</b>	10 Aug 2022	27 Apr 2022
Machine Age	mls	Client Info		<b>164404</b>	135366	128886
Oil Age	mls	Client Info		<b>45082</b>	16044	9564
Filter Age	mls	Client Info		<b>45082</b>	16044	9564
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>ABNORMAL</b>	NORMAL	ABNORMAL

### WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>99</b>	70	65
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>4</b>	2	1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>50	<b>▲ 61</b>	42	39
Lead	ppm	ASTM D5185m	>50	<b>0</b>	1	2
Copper	ppm	ASTM D5185m	>225	<b>27</b>	24	24
Tin	ppm	ASTM D5185m	>10	<b>2</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION






There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>11</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	4	4
Boron	ppm	ASTM D5185m		<b>73</b>	101	88
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>4</b>	5	5
Manganese	ppm	ASTM D5185m		<b>20</b>	18	19
Magnesium	ppm	ASTM D5185m		<b>1</b>	<1	0
Calcium	ppm	ASTM D5185m		<b>115</b>	116	116
Phosphorus	ppm	ASTM D5185m		<b>191</b>	187	187
Zinc	ppm	ASTM D5185m		<b>0</b>	4	<1
Sulfur	ppm	ASTM D5185m		<b>1160</b>	1139	1152
Visc @ 40°C	cSt	ASTM D445	35.0	<b>26.0</b>	27.0	27.1

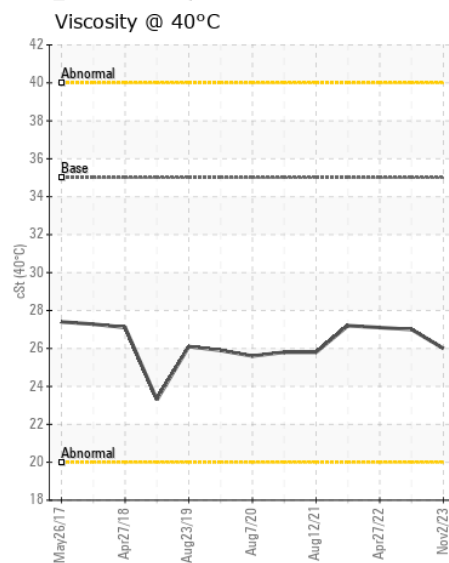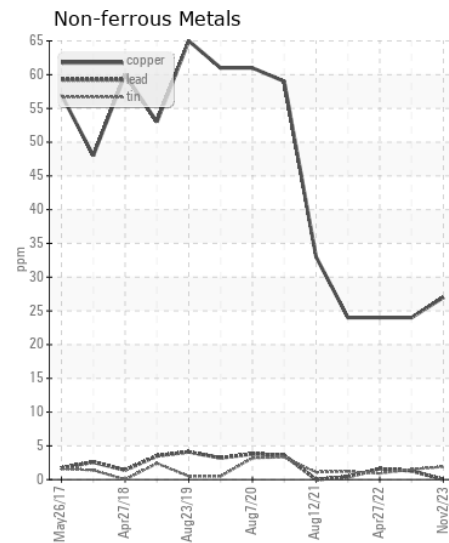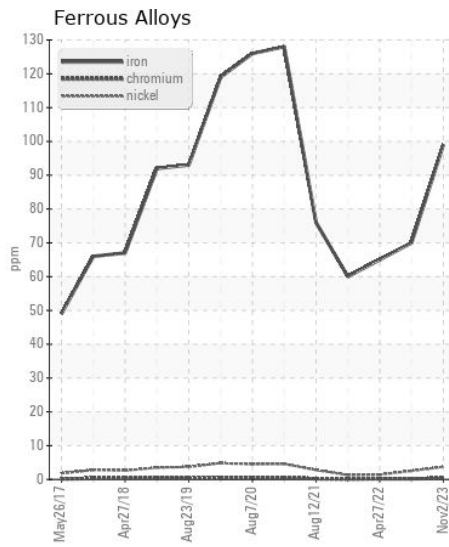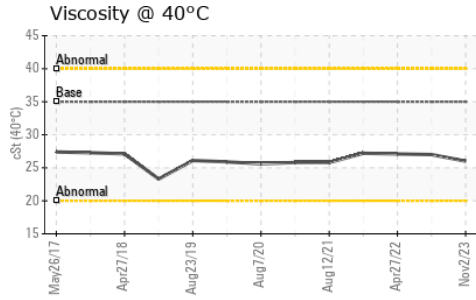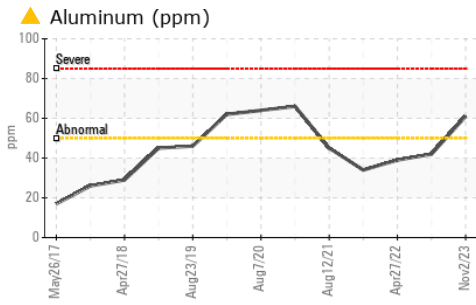

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ARI0007349  
**Lab Number** : 06028246  
**Unique Number** : 10778037  
**Test Package** : CONST

**Received** : 07 Dec 2023  
**Tested** : 09 Dec 2023  
**Diagnosed** : 10 Dec 2023 - Don Baldrige

**INSITUFORM TECHNOLOGIES, INC**  
 253F WORCESTER ROAD  
 CHARLTON, MA  
 US 01507

Contact: STEVE LEWIS  
 SLEWIS@INSITUFORM.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (313)549-5717  
 F: (508)248-1709