



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[621739]

Machine Id

VOLVO EC750 310137

Component

Hydraulic System

Fluid

VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP431438	VCP365880	VCP349228
Sample Date		Client Info		30 Nov 2023	12 Sep 2022	01 Mar 2022
Machine Age	hrs	Client Info		6059	5083	4065
Oil Age	hrs	Client Info		2000	1000	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	4	12	6
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	1	2	2
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>150	8	15	11
Tin	ppm	ASTM D5185m	>10	0	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	▲ LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	3	5	6
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>40000	26102	▲ 218290	▲ 82502
Particles >6µm		ASTM D7647	>10000	4918	▲ 75082	1888
Particles >14µm		ASTM D7647	>2500	336	505	12
Particles >21µm		ASTM D7647	>640	71	47	3
Particles >38µm		ASTM D7647	>160	2	1	0
Particles >71µm		ASTM D7647	>40	0	0	0
Oil Cleanliness		ISO 4406 (c)	>22/20/18	22/19/16	▲ 25/23/16	▲ 24/18/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	0
Boron	ppm	ASTM D5185m	14	0	3	4
Barium	ppm	ASTM D5185m	0.0	3	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	1	2
Manganese	ppm	ASTM D5185m	0.0	0	<1	<1
Magnesium	ppm	ASTM D5185m	2.6	10	18	24
Calcium	ppm	ASTM D5185m	49	475	918	1401
Phosphorus	ppm	ASTM D5185m	354	265	529	626
Zinc	ppm	ASTM D5185m	419	375	630	730
Sulfur	ppm	ASTM D5185m	3719	1301	2640	2270
Acid Number (AN)	mg KOH/g	ASTM D8045		0.49	0.42	0.65
Visc @ 40°C	cSt	ASTM D445	46	40.7	40.3	40.2

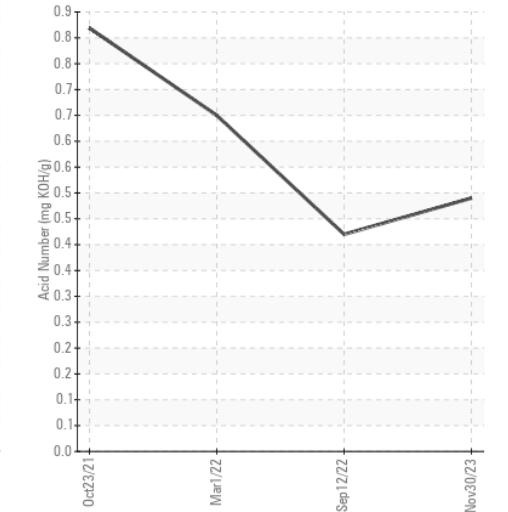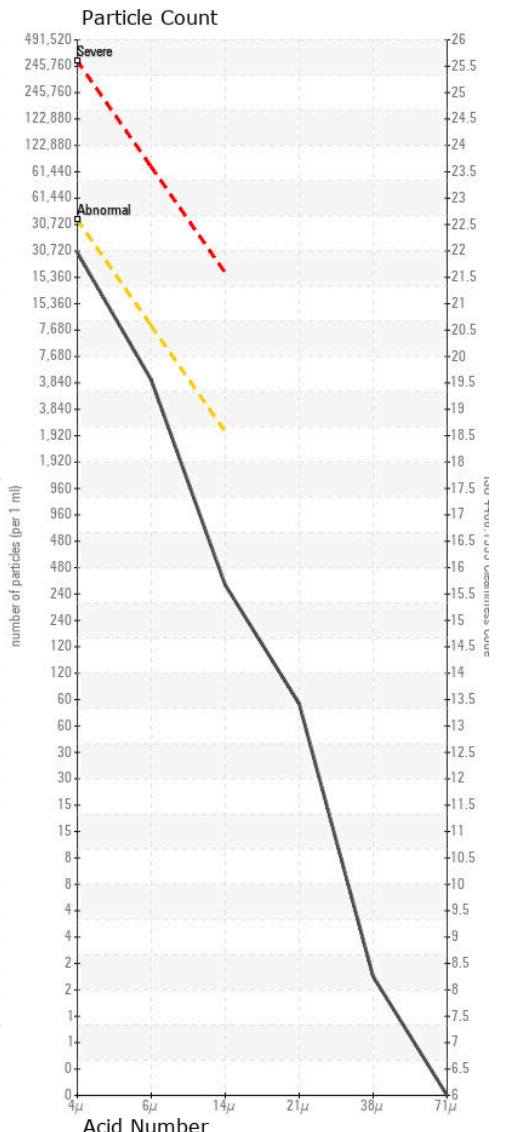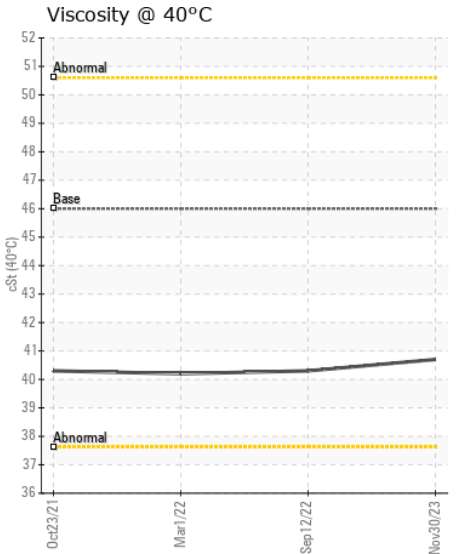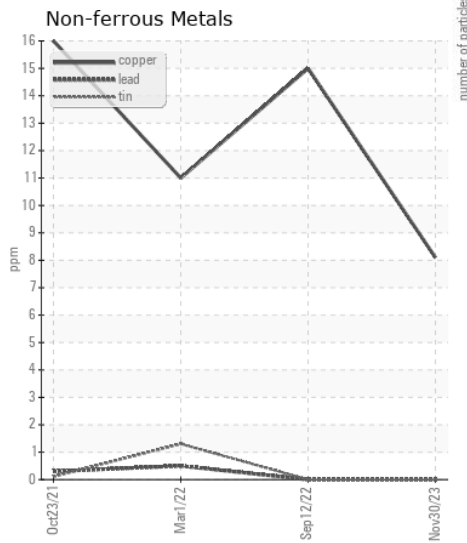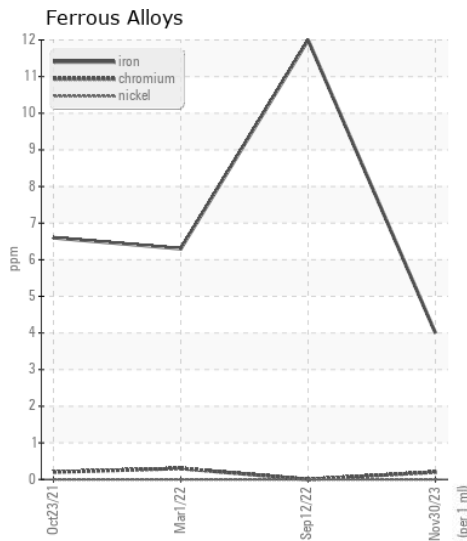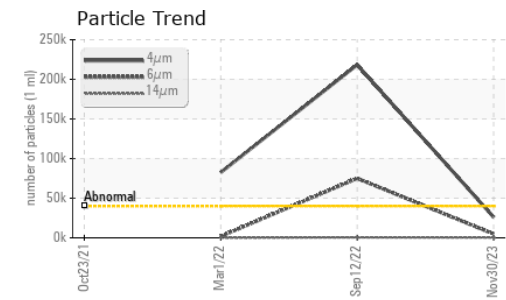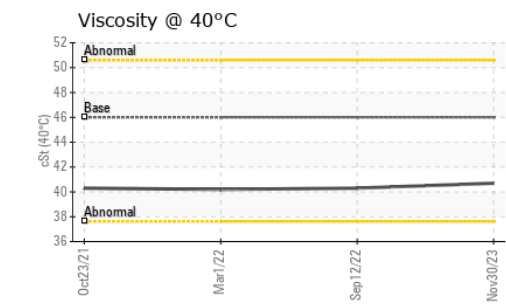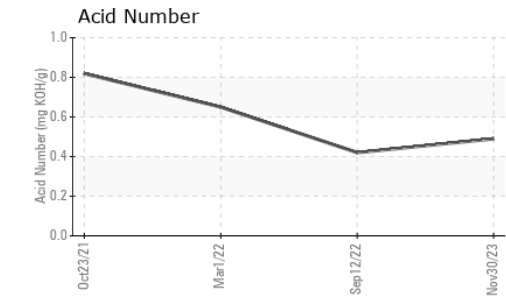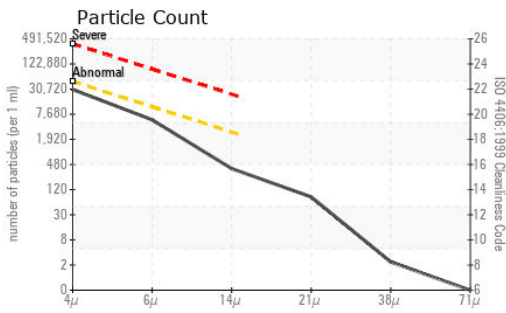

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP431438 **Received** : 08 Dec 2023
Lab Number : 06029328 **Tested** : 11 Dec 2023
Unique Number : 10779119 **Diagnosed** : 11 Dec 2023 - Wes Davis
Test Package : MOB 2

BLAZE CONSTRUCTION
 5640 ST JEAN ST
 DETROIT, MI
 US 48213
 Contact: DAVE WARD
 dward@blazecontracting.net
 T: (248)632-2317
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)