



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

MITIGATION RESOURCES [G13799]

Machine Id

JOHN DEERE 423468

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006085	WE0004456	---
Sample Date		Client Info		06 Dec 2023	19 Jul 2023	---
Machine Age	hrs	Client Info		708	390	---
Oil Age	hrs	Client Info		500	390	---
Filter Age	hrs	Client Info		500	390	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The copper level has decreased, but is still abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	20	34	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>31	3	5	---
Lead	ppm	ASTM D5185m	>26	<1	2	---
Copper	ppm	ASTM D5185m	>26	▲ 89	▲ 201	---
Tin	ppm	ASTM D5185m	>4	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	16	50	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Fuel		WC Method	>2.1	<1.0	0.7	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	10.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	26.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	12	---
Boron	ppm	ASTM D5185m		130	157	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		170	264	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m		685	772	---
Calcium	ppm	ASTM D5185m		1614	1847	---
Phosphorus	ppm	ASTM D5185m		816	849	---
Zinc	ppm	ASTM D5185m		1191	1100	---
Sulfur	ppm	ASTM D5185m		3071	3435	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	24.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.1	7.4	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	12.4	---

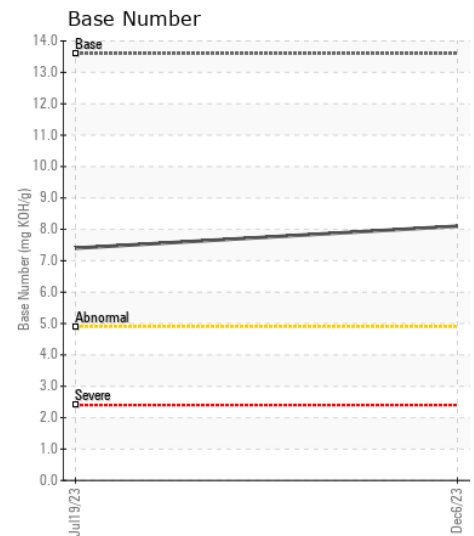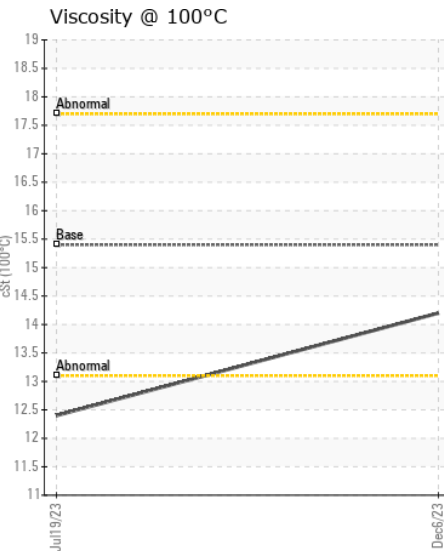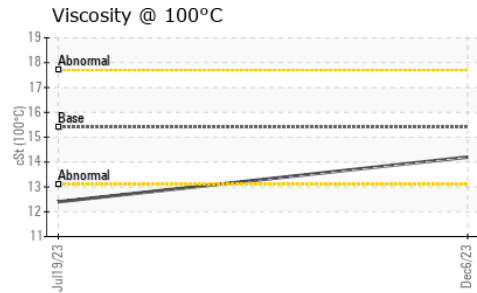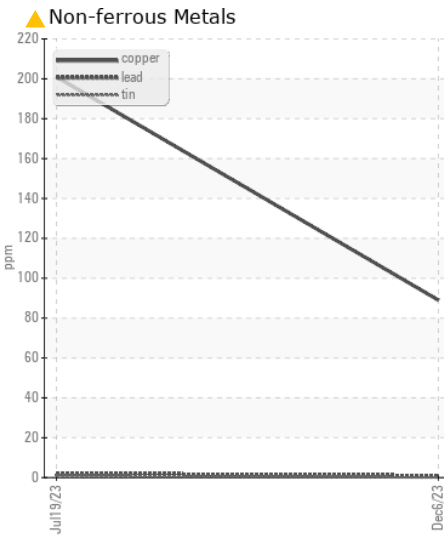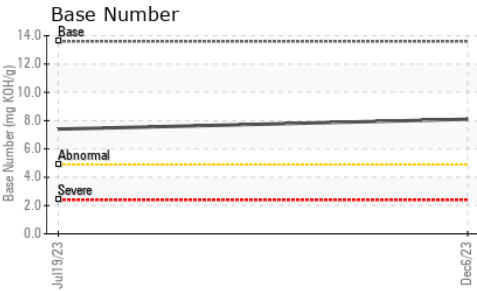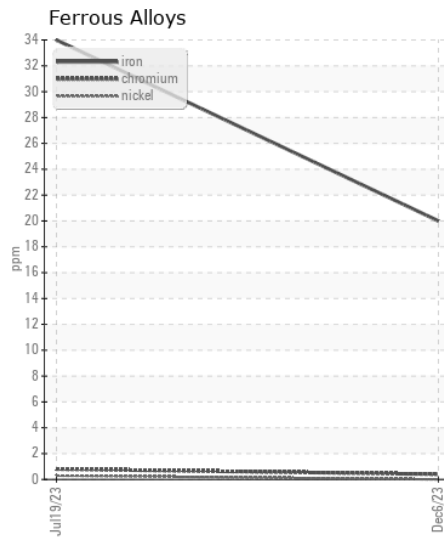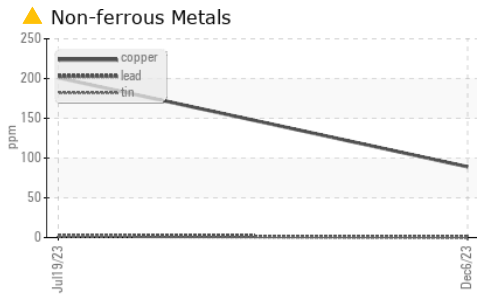

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006085 **Received** : 11 Dec 2023
Lab Number : 06030301 **Tested** : 12 Dec 2023
Unique Number : 10780092 **Diagnosed** : 13 Dec 2023 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE
 4308 WATER TRAIL
 GRAYSVILLE, AL
 US 35073
 Contact: BEN BYRKET
 bbyrket@warriortractor.com
 T: (205)675-9045
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)