



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
EMPE
Machine Id
P210-11-1030 (S/N V456)
Component
Hydraulic System
Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 68 (200 GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO5002461	---	---
Sample Date		Client Info		08 Sep 2023	---	---
Machine Age	hrs	Client Info		11748	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	12	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>15	9	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water	%	ASTM D6304	>0.05	0.044	---	---
ppm Water	ppm	ASTM D6304	>500	440	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		68	---	---
Calcium	ppm	ASTM D5185m		42	---	---
Phosphorus	ppm	ASTM D5185m	425	307	---	---
Zinc	ppm	ASTM D5185m	500	361	---	---
Sulfur	ppm	ASTM D5185m	1900	1684	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.7	0.59	---	---
Visc @ 40°C	cSt	ASTM D445	67.4	68.3	---	---
Visc @ 100°C	cSt	ASTM D445	8.8	8.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	101	---	---

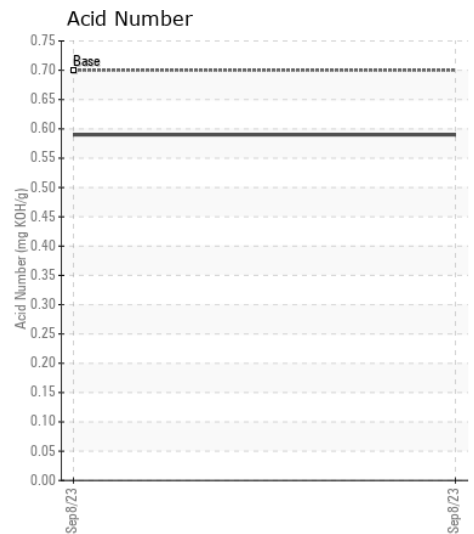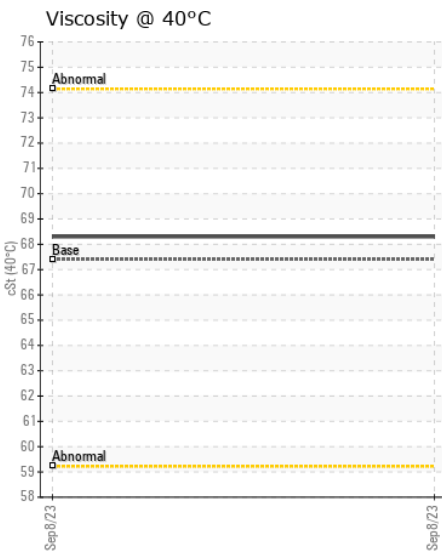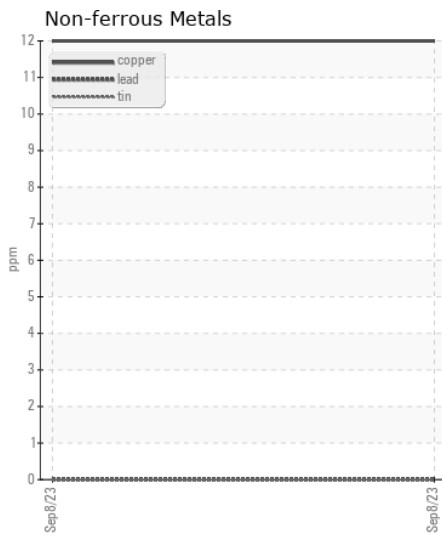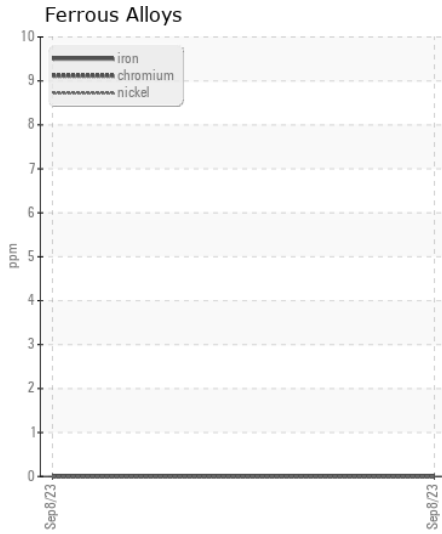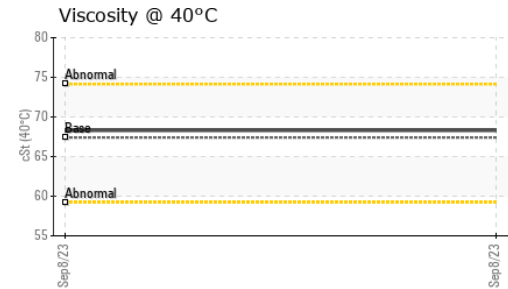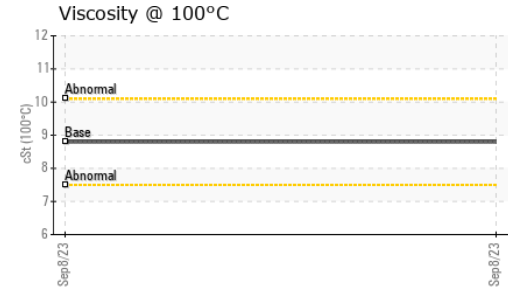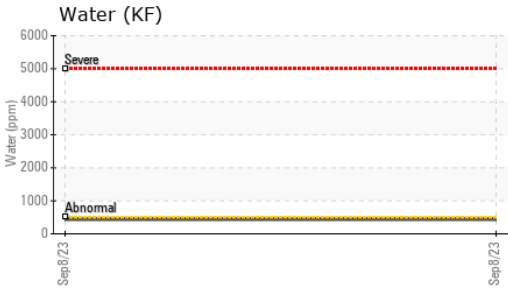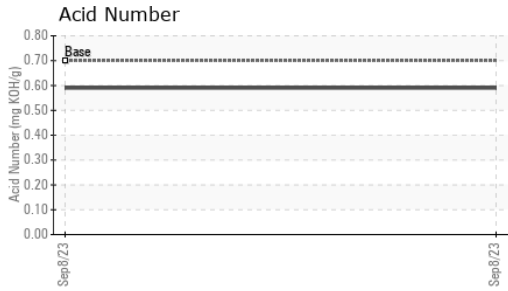

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO5002461 **Received** : 15 Dec 2023
Lab Number : 06036074 **Diagnosed** : 19 Dec 2023
Unique Number : 10791303 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

JAMAK FABRICATION
 1401 NORTH BOWIE DRIVE
 WEATHERFORD, TX
 US 76086
 Contact: LARRY NORRIS
 lano@jamak.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: