



Machine Id
PRS
Component
Starboard Reduction Gear
Fluid
PETRO CANADA DURON MARINE SAE 40 (28 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06048416	MW06017503	MW05863164
Sample Date		Client Info		01 Jan 2024	23 Nov 2023	01 Jun 2023
Machine Age	hrs	Client Info		31123	30321	29389
Oil Age	hrs	Client Info		1300	507	1203
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	5	5	4
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	0
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>50	1	1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	4	4
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	3
Boron	ppm	ASTM D5185m	1.0	245	250	360
Barium	ppm	ASTM D5185m	1.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.0	29	29	37
Manganese	ppm	ASTM D5185m	1	<1	<1	<1
Magnesium	ppm	ASTM D5185m	15	255	239	73
Calcium	ppm	ASTM D5185m	2540	2192	2128	2740
Phosphorus	ppm	ASTM D5185m	1000	922	735	805
Zinc	ppm	ASTM D5185m	1110	1031	945	925
Sulfur	ppm	ASTM D5185m	3700	3486	3605	3656
Acid Number (AN)	mg KOH/g	ASTM D8045	2.7	1.13	1.15	1.23
Visc @ 40°C	cSt	ASTM D445	133.5	115	121	124

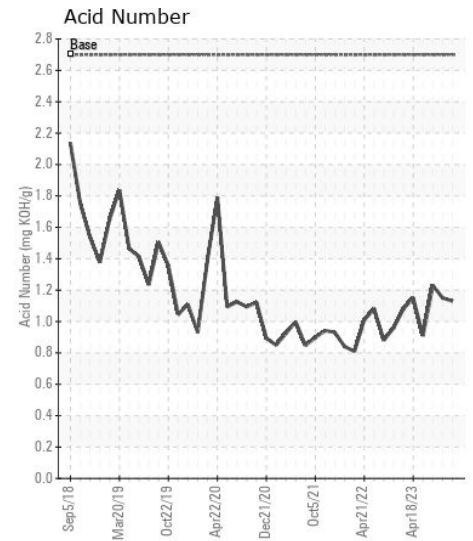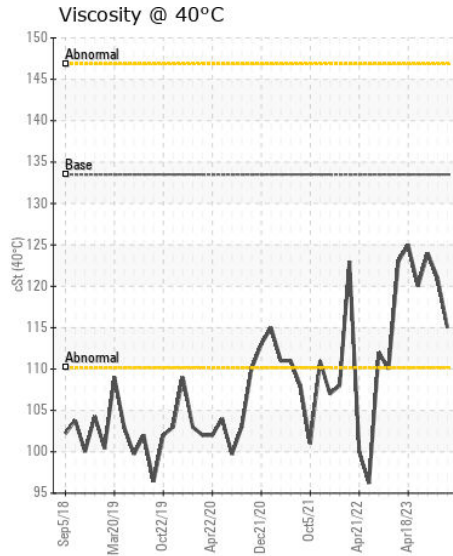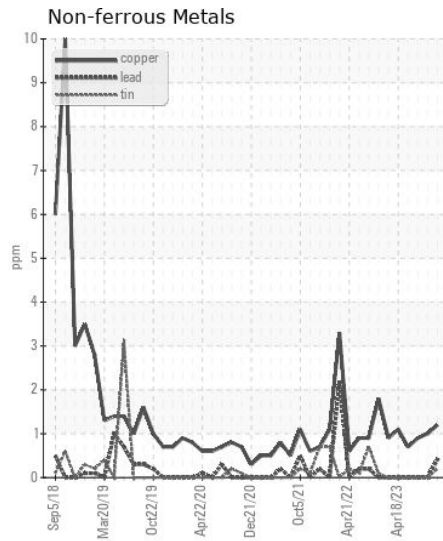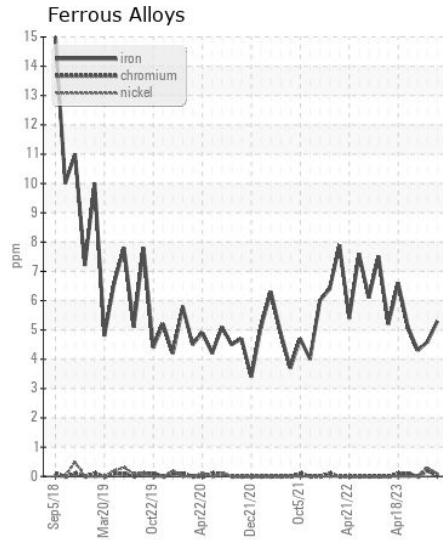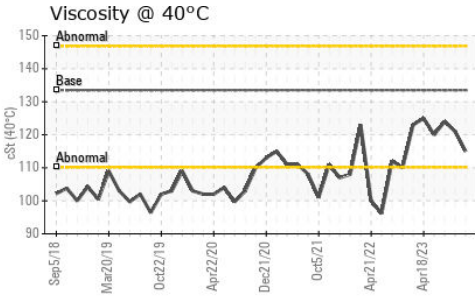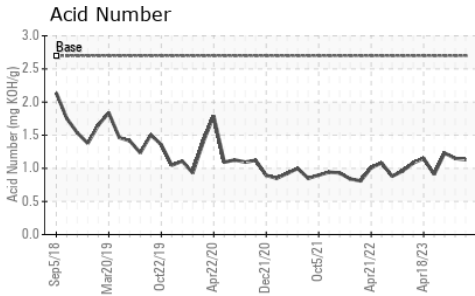

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW06048416 **Received** : 29 Dec 2023
Lab Number : 06048416 **Tested** : 02 Jan 2024
Unique Number : 10809024 **Diagnosed** : 03 Jan 2024 - Don Baldrige
Test Package : MAR 2

ILLINOIS MARINE TOWING
 PO BOX 391
 LEMONT, IL
 US 60439
 Contact: RHETT DANIEL
 rdaniel@imtowing.com
 T: (630)280-4926
 F: (630)739-2041

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)