

CORROSION NORMAL CONTAMINANTS NORMAL FUEL CONDITION NORMAL

#### [PMIAS3096818] Machine Id NOT GIVEN DC0031457 (S/N NO INFO ON SIF/BOTTLE) Component Diesel Fuel

# {not provided} (--- GAL)

## RECOMMENDATION

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

### **CORROSION**

All metal levels are normal indicating no corrosion in the system.


## CONTAMINANTS

The water content is negligible. There is no Bacteria, Yeast and/or Fungus indicated in the sample. There is no indication of any contamination in the fuel.


Test	UOM	Method	Limit/Abn	Cu	rrent	History1	History2
Sample Number	00101	Client Info	LITTICAOT		0031457		
•		Client Info			Jan 2024		
Sample Date	la un				Jan 2024		
Machine Age	hrs	Client Info		0			
Sample Status				NO	RMAL		
Aluminum	ppm	ASTM D5185m	<0.1	:	2		
Nickel	ppm	ASTM D5185m	<0.1	(	0		
Lead	ppm	ASTM D5185m	<0.1	(	0		
Vanadium	ppm	ASTM D5185m	<0.1	(	0		
Iron	ppm	ASTM D5185m	<0.1	(	D		
Silicon		ASTM D5185m	<1.0		D		
Sodium	ppm	ASTM D5185m	<0.1		0		
	ppm						
Potassium	ppm	ASTM D5185m	<0.1		0		
Water	%	ASTM D6304	<0.05		0.003		
ppm Water	ppm	ASTM D6304	<500		28		
% Gasoline	%	*In-House	<0.50	(	0.0		
% Biodiesel	%	*In-House	<20.0	(	0.0		
Calcium	ppm	ASTM D5185m	<0.1	(	0		
Magnesium	ppm	ASTM D5185m	<0.1	(	D		
Phosphorus	ppm	ASTM D5185m	<0.1	(	0		
Zinc	ppm	ASTM D5185m	<0.1	(	D		
ASTM Color	scalar	*ASTM D1500			L4.0		
Visc @ 40°C	cSt	ASTM D445		2	2.56		
Sulfur	ppm	ASTM D5185m		(	0		
Sulfur (UVF)	ppm	ASTM D5453		8	В		
API Gravity		ASTM D7777		:	36.4		


## FUEL CONDITION

Sulfur value derived by ASTM D4294 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

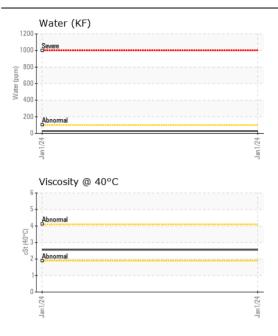

#### Pensky-Martens Flash Point (°C)

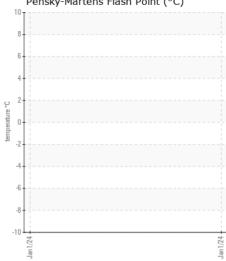

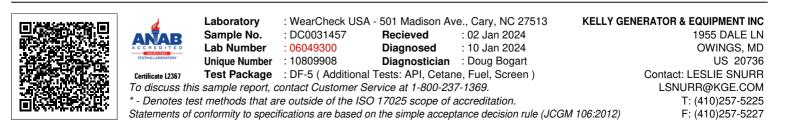

Contact/Location: LESLIE SNURR - KELOWI

Page 2 of 2