



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**EVEY T**  
Machine Id  
**[EVEY T] 006 558474-6**  
Component  
**Starboard Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0063200</b>	MW0063205	MW0061267
Sample Date		Client Info		<b>01 Jan 2024</b>	01 Dec 2023	01 Nov 2023
Machine Age	hrs	Client Info		<b>78112</b>	77380	76649
Oil Age	hrs	Client Info		<b>23343</b>	15624	14893
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>82</b>	87	88
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>100	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	4	3
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>1</b>	2	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	8	5
Boron	ppm	ASTM D5185m	20	<b>2</b>	7	5
Barium	ppm	ASTM D5185m		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	0	<b>3</b>	1	1
Manganese	ppm	ASTM D5185m		<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	<1	0
Calcium	ppm	ASTM D5185m	25	<b>19</b>	30	18
Phosphorus	ppm	ASTM D5185m	235	<b>246</b>	250	248
Zinc	ppm	ASTM D5185m		<b>&lt;1</b>	0	12
Sulfur	ppm	ASTM D5185m		<b>5254</b>	5399	5141
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.58</b>	0.41	0.46
Visc @ 40°C	cSt	ASTM D445	304	<b>322</b>	323	323

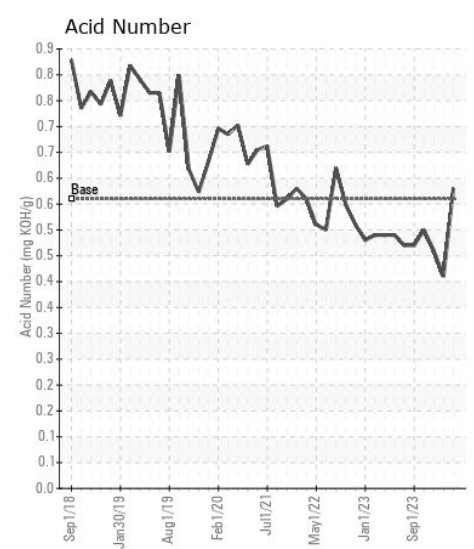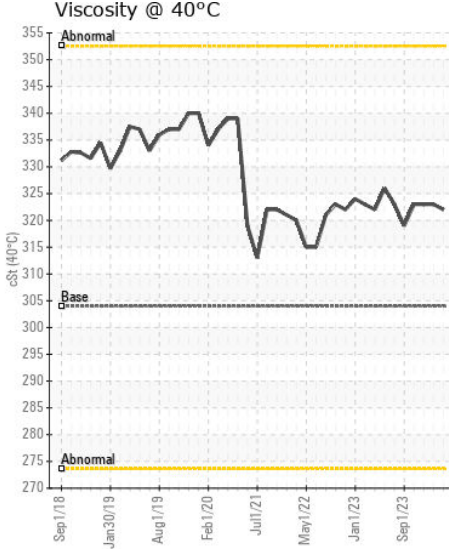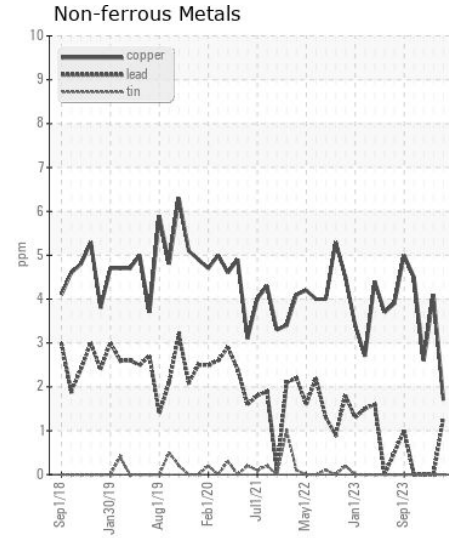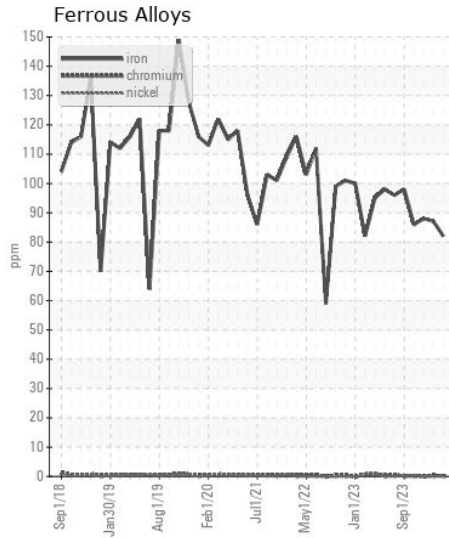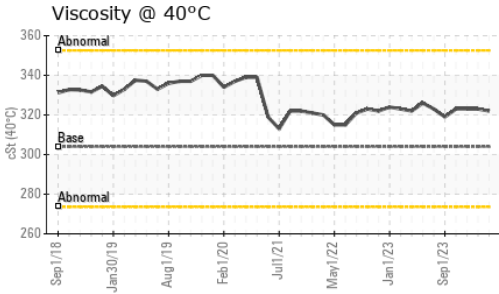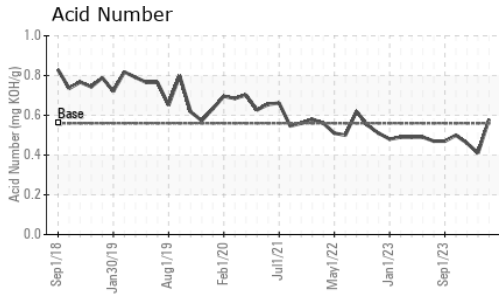

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0063200 **Received** : 08 Jan 2024  
**Lab Number** : 06054061 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10820010 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: JUSTIN WHEELER  
 justin.wheeler@ingrambarga.com

T:  
 F: (615)695-3697