



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**LES GRIMM**  
Machine Id  
**[LES GRIMM] 001 569145-1**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 710 LE (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0059949</b>	MW0059963	MW0059959
Sample Date		Client Info		<b>01 Nov 2023</b>	01 Oct 2023	01 Sep 2023
Machine Age	hrs	Client Info		<b>32021</b>	31294	30630
Oil Age	hrs	Client Info		<b>32021</b>	31294	30630
Filter Age	hrs	Client Info		<b>509</b>	1122	452
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>8</b>	9	10
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	5
Lead	ppm	ASTM D5185m	>18	<b>8</b>	8	8
Copper	ppm	ASTM D5185m	>80	<b>15</b>	17	18
Tin	ppm	ASTM D5185m	>14	<b>5</b>	5	5
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.7</b>	0.7	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	9.2	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.0</b>	17.4	20.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>12</b>	15	18
Boron	ppm	ASTM D5185m		<b>28</b>	34	35
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>42</b>	45	46
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>14</b>	18	17
Calcium	ppm	ASTM D5185m		<b>3251</b>	3498	3632
Phosphorus	ppm	ASTM D5185m		<b>6</b>	10	12
Zinc	ppm	ASTM D5185m	10	<b>1</b>	1	0
Sulfur	ppm	ASTM D5185m		<b>2253</b>	2233	2737
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.3</b>	9.0	10.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>9.36</b>	8.85	8.01
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.5</b>	14.6	14.7

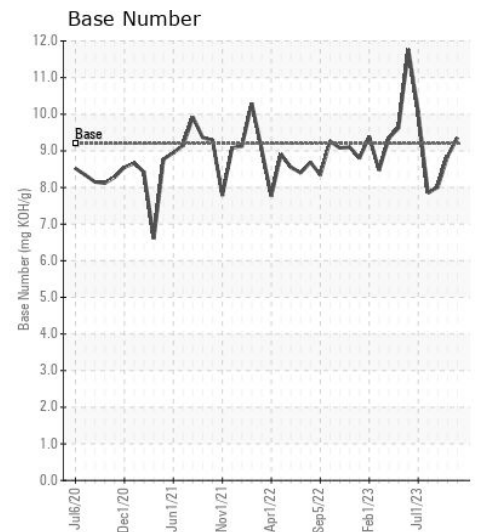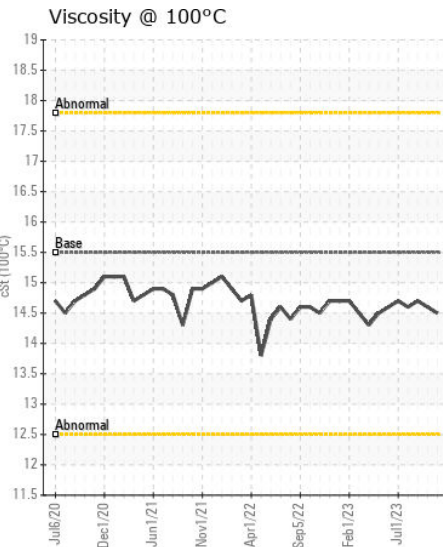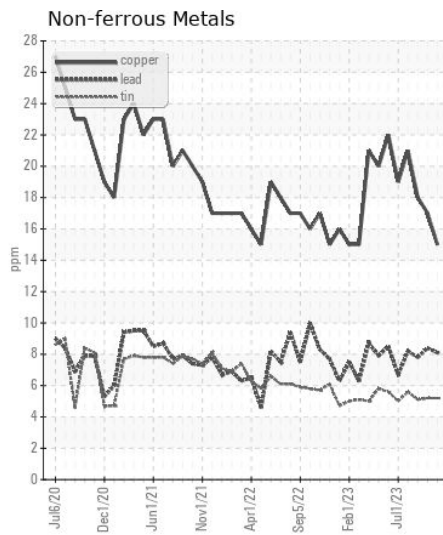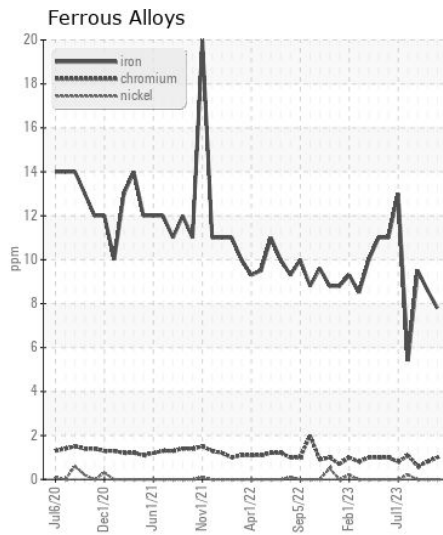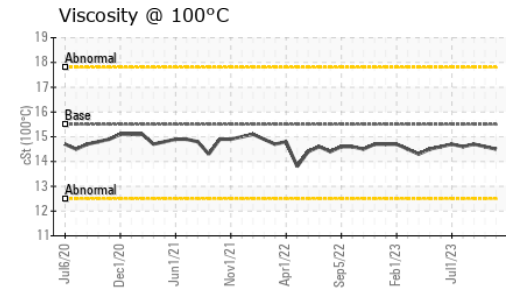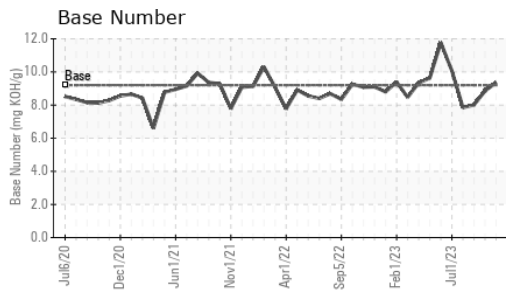

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0059949 **Received** : 08 Jan 2024  
**Lab Number** : 06054094 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10820043 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)