



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CHARLIE M EVERHART
Machine Id
[CHARLIE M EVERHART] 003 534782-3
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 LE 15W40 (30 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0042997	MW0042994	MW0062867
Sample Date		Client Info		01 Jan 2024	01 Dec 2023	31 Oct 2023
Machine Age	hrs	Client Info		12591	11950	1254
Oil Age	hrs	Client Info		190	382	1254
Filter Age	hrs	Client Info		190	1006	1254
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

The lead level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	6	9	9
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	3	2
Lead	ppm	ASTM D5185m	>18	▲ 21	▲ 29	9
Copper	ppm	ASTM D5185m	>80	25	19	5
Tin	ppm	ASTM D5185m	>14	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	5	4	5
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.6	8.1	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	22.5	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>75	<1	3	0
Boron	ppm	ASTM D5185m		321	325	326
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		114	104	110
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		619	556	523
Calcium	ppm	ASTM D5185m		1516	1435	1424
Phosphorus	ppm	ASTM D5185m	1200	789	735	774
Zinc	ppm	ASTM D5185m	1300	886	879	877
Sulfur	ppm	ASTM D5185m	3200	2688	2519	2591
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	18.0	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	8.92	7.81	8.94
Visc @ 100°C	cSt	ASTM D445	15.7	12.9	12.6	12.4


▲ Non-ferrous Metals

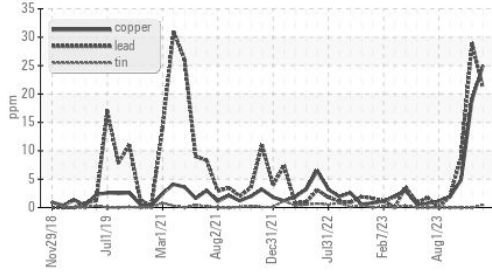


Ferrous Alloys

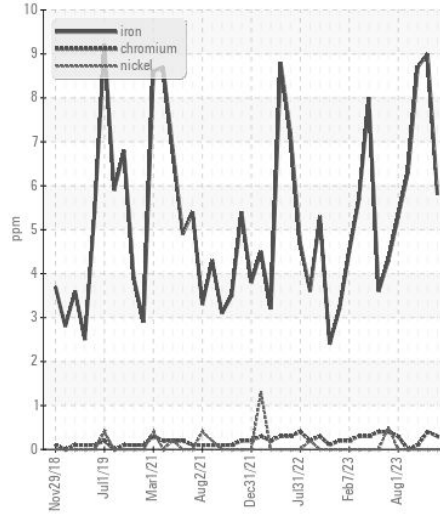


Base Number

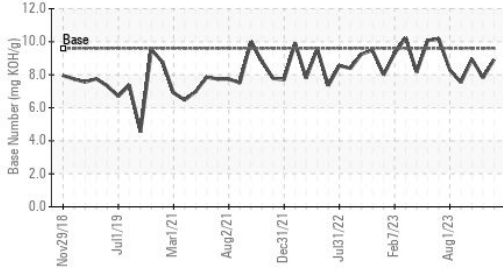


Viscosity @ 100°C

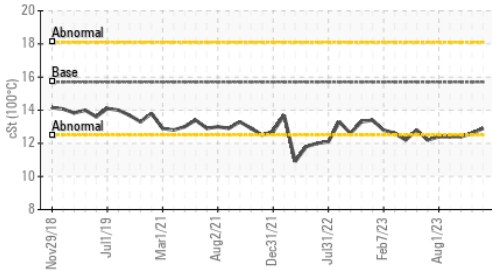


▲ Non-ferrous Metals

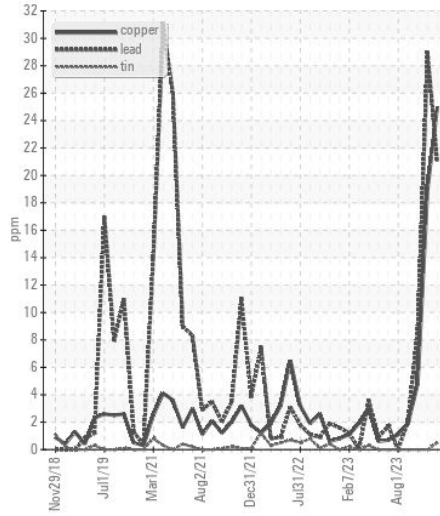

Viscosity @ 100°C

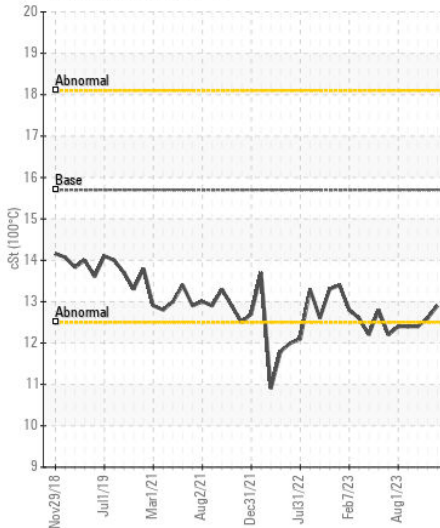

Base Number

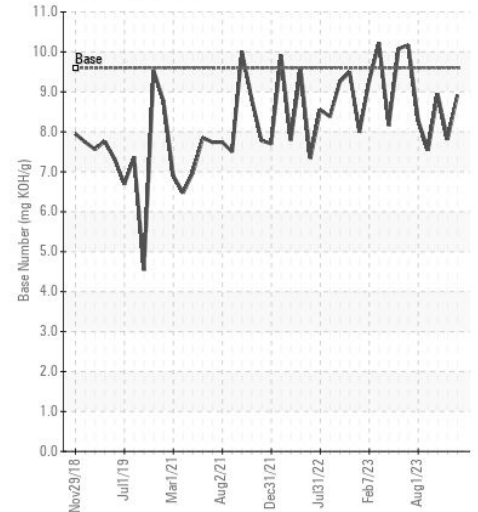

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0042997 **Received** : 08 Jan 2024
Lab Number : 06054105 **Diagnosed** : 09 Jan 2024
Unique Number : 10820054 **Diagnostician** : Sean Felton
Test Package : MAR 2

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: JAMES ADAIR
 james.adair@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)