



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
SHUTTLELIFT 7755F CD1265 (S/N 321265)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL 10W40 (4 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0003797	HPL008697	---
Sample Date		Client Info		06 Jan 2024	19 Jul 2022	---
Machine Age	hrs	Client Info		8310	7816	---
Oil Age	hrs	Client Info		0	650	---
Filter Age	hrs	Client Info		0	650	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	15	22	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	2	---
Aluminum	ppm	ASTM D5185m	>20	6	2	---
Lead	ppm	ASTM D5185m	>40	1	2	---
Copper	ppm	ASTM D5185m	>330	6	8	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	12	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.4	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	36.6	30.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m	250	19	243	---
Barium	ppm	ASTM D5185m	10	1	0	---
Molybdenum	ppm	ASTM D5185m	100	570	644	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	966	447	---
Calcium	ppm	ASTM D5185m	3000	2678	3669	---
Phosphorus	ppm	ASTM D5185m	1150	1106	816	---
Zinc	ppm	ASTM D5185m	1350	1275	975	---
Sulfur	ppm	ASTM D5185m	4250	9288	16941	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	36.6	18.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.38	14.7	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	13.8	---

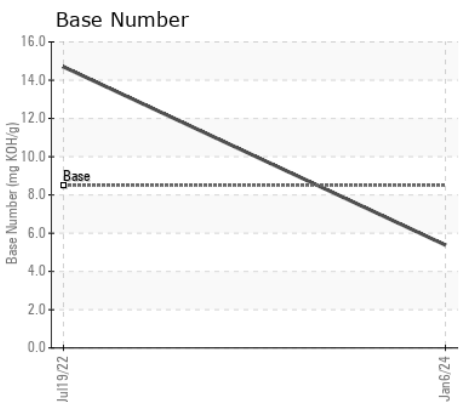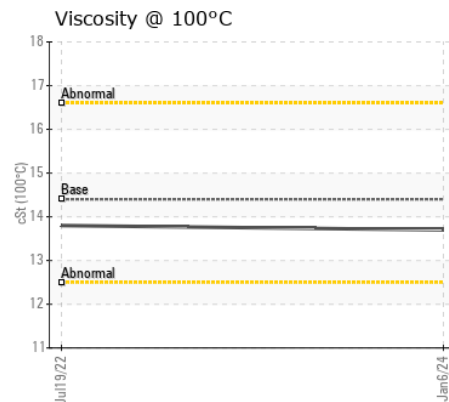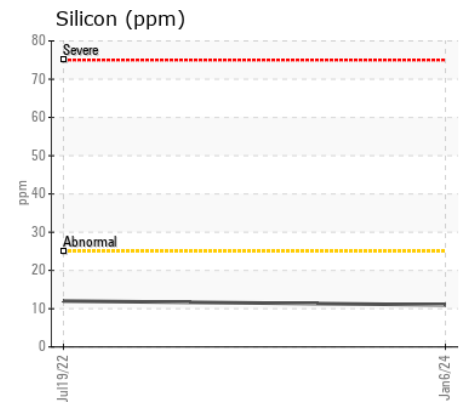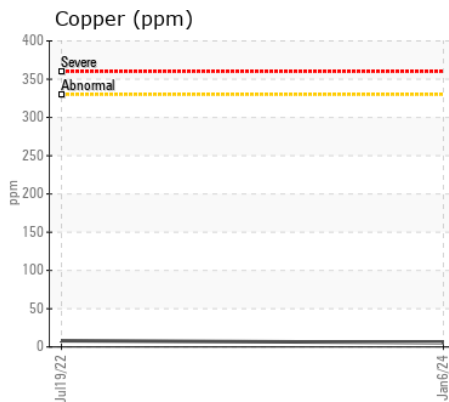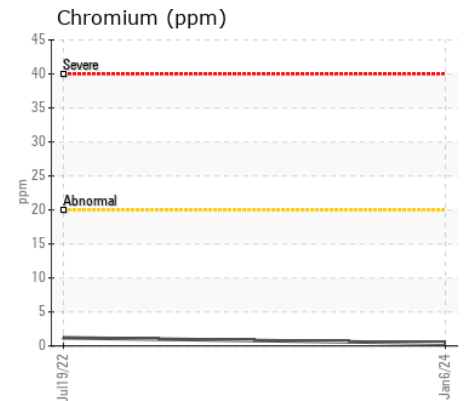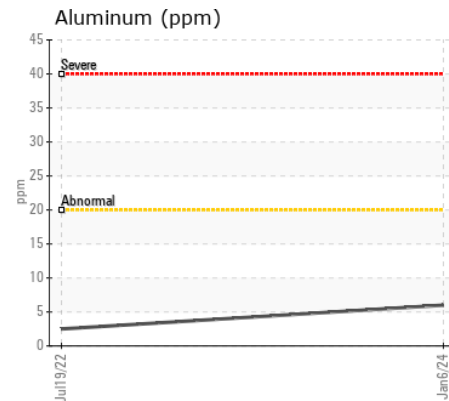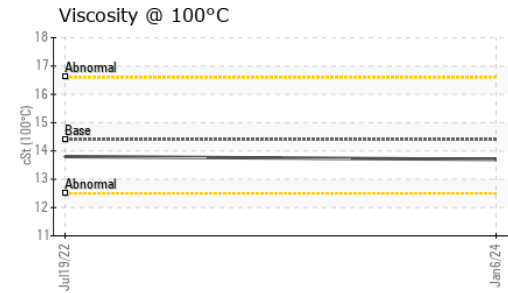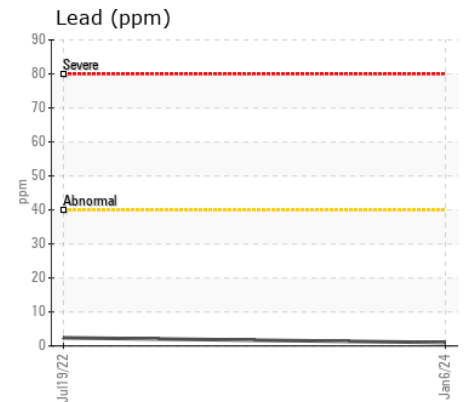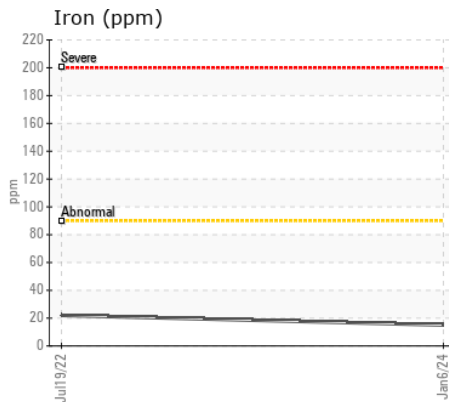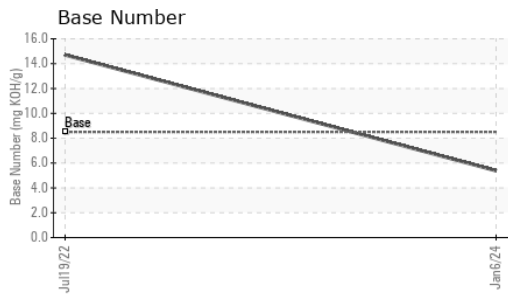

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0003797 **Received** : 08 Jan 2024
Lab Number : 06054145 **Diagnosed** : 09 Jan 2024
Unique Number : 10820094 **Diagnostician** : Sean Felton
Test Package : MOB 2

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440
 Contact: DAVE KOEHNE
 davidk@stevensoncrane.com
 T: (630)972-9199
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)