



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>MARGINAL</b>

Machine Id  
**FORD F350 4**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>HPL0002480</b>	---	---
Sample Date		Client Info		<b>02 Jan 2024</b>	---	---
Machine Age	mls	Client Info		<b>273678</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>47</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>10</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>5</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material. Light fuel dilution occurring.


Silicon	ppm	ASTM D5185m	>25	<b>▲ 30</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Fuel	%	ASTM D3524	>5	<b>▲ 2.2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.7</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>158	<b>10</b>	---	---
Boron	ppm	ASTM D5185m	250	<b>13</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>929</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>1133</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>996</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>1151</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>3082</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.6</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.72</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>▲ 12.3</b>	---	---


▲ Silicon (ppm)

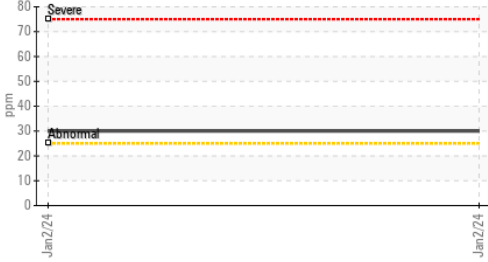

Iron (ppm)

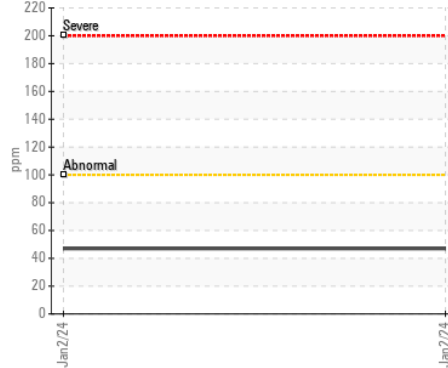


Lead (ppm)

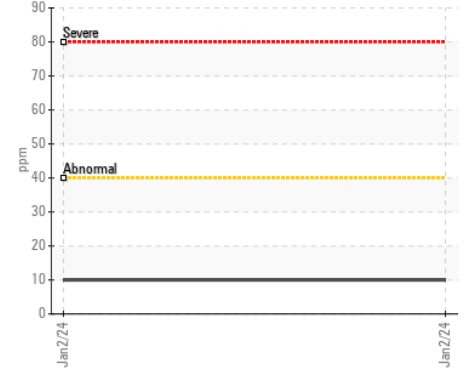


▲ Fuel Dilution



Aluminum (ppm)

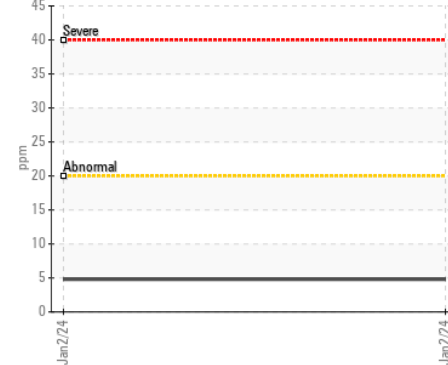


Chromium (ppm)

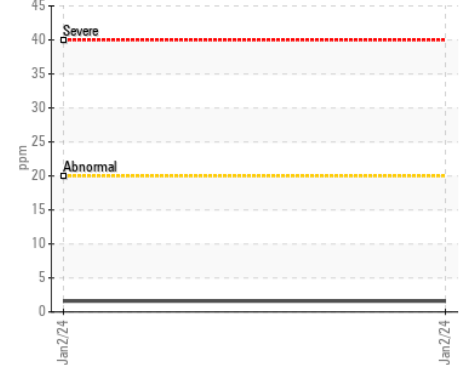


▲ Viscosity @ 100°C




Copper (ppm)

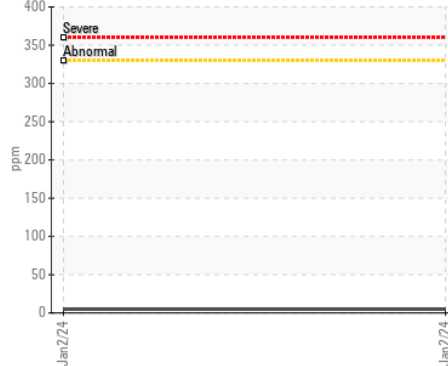


▲ Silicon (ppm)

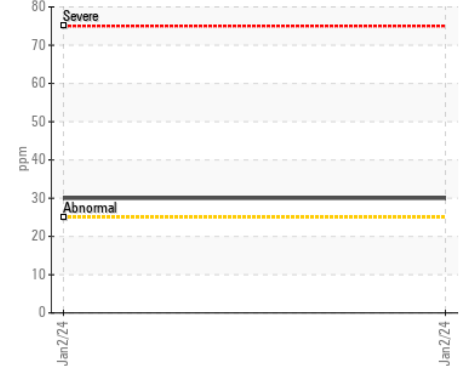


Base Number

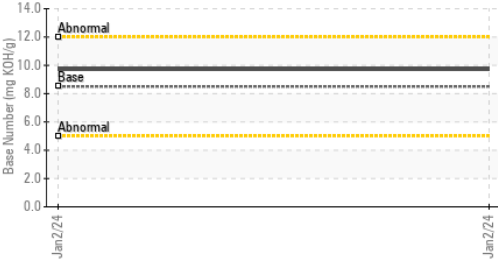

▲ Viscosity @ 100°C

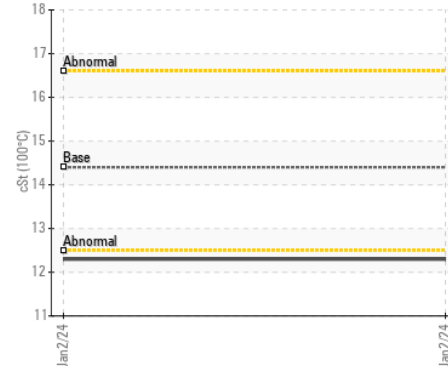

Base Number

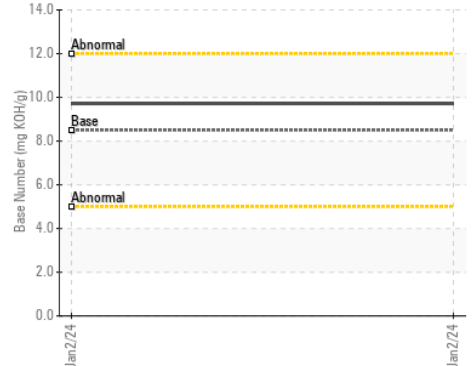

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0002480 **Received** : 08 Jan 2024  
**Lab Number** : 06054155 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10820104 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JD PERKINS FARMS**

PO BOX 645  
 HOWARD, KS  
 US 67349

Contact: DAVID PERKINS  
 jdp@sktc.net

T: (620)330-7107

F: x: