



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
12 (S/N 1NKZL40X0PJ172635)

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06054166	TR05903923	---
Sample Date		Client Info		19 Nov 2023	18 Jul 2023	---
Machine Age	hrs	Client Info		3554	2268	---
Oil Age	hrs	Client Info		1286	838	---
Filter Age	hrs	Client Info		1286	838	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	34	26	---
Chromium	ppm	ASTM D5185m	>20	2	2	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	46	29	---
Lead	ppm	ASTM D5185m	>40	5	2	---
Copper	ppm	ASTM D5185m	>330	3	5	---
Tin	ppm	ASTM D5185m	>15	2	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	10	---
Potassium	ppm	ASTM D5185m	>20	105	69	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.8	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	12.5	11.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.6	24.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	0	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	2	---
Molybdenum	ppm	ASTM D5185m		138	123	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		21	23	---
Calcium	ppm	ASTM D5185m		4376	4727	---
Phosphorus	ppm	ASTM D5185m		947	901	---
Zinc	ppm	ASTM D5185m		1079	1076	---
Sulfur	ppm	ASTM D5185m		4360	4667	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	14.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.79	14.23	---
Visc @ 100°C	cSt	ASTM D445		15.3	15.0	---

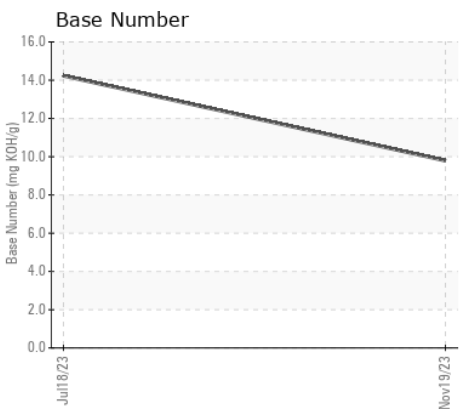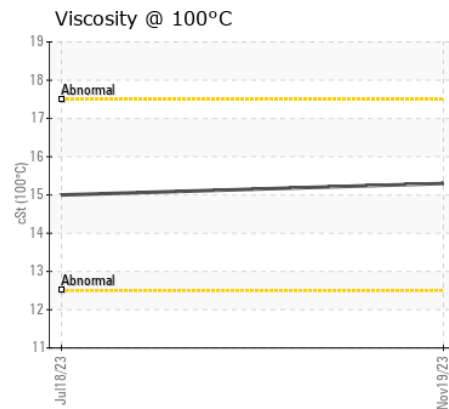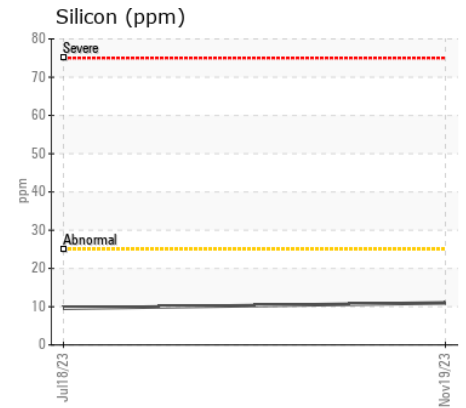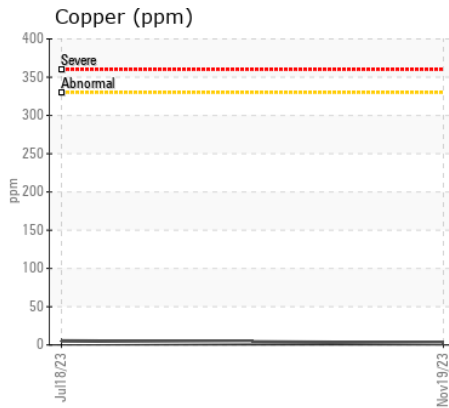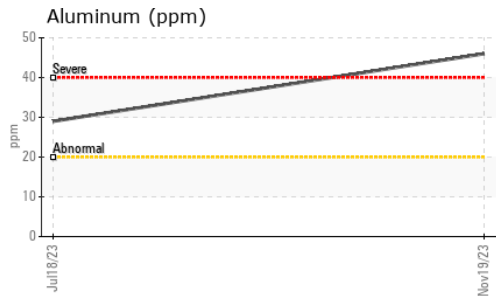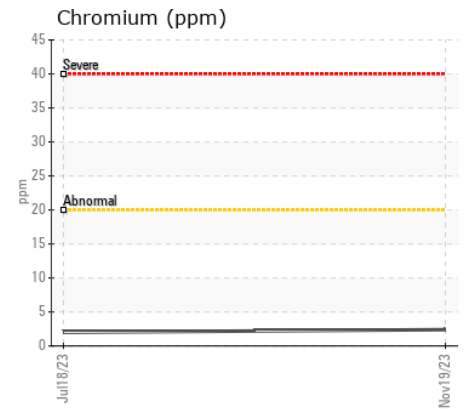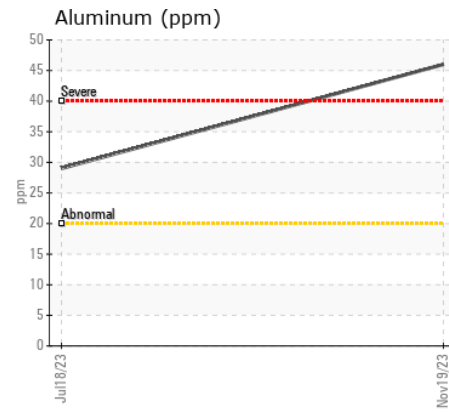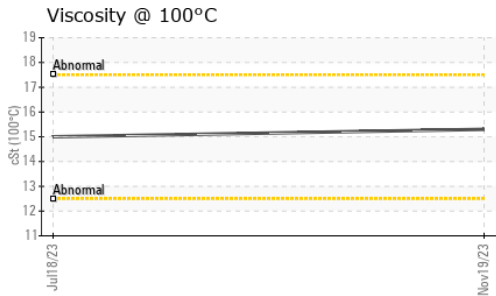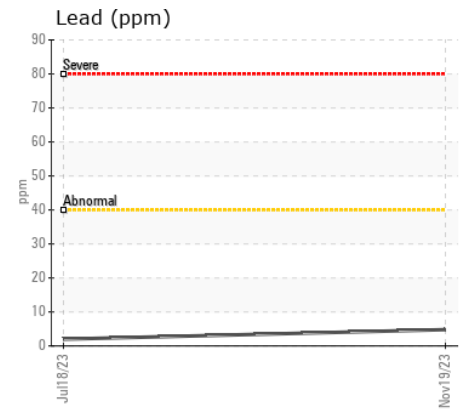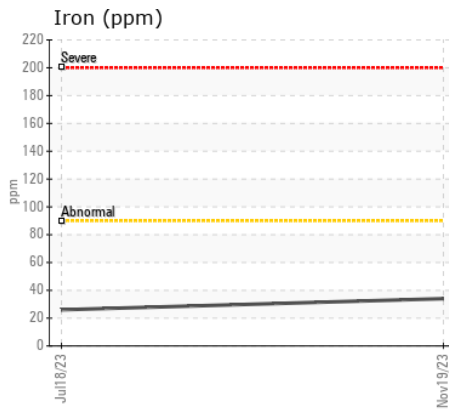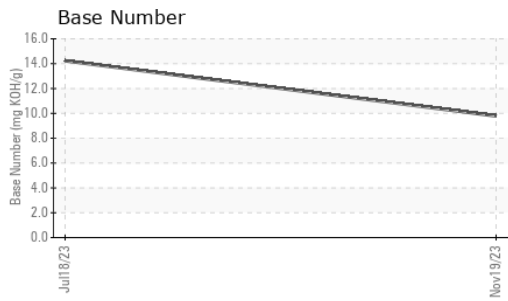

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06054166 **Received** : 08 Jan 2024
Lab Number : 06054166 **Diagnosed** : 09 Jan 2024
Unique Number : 10820115 **Diagnostician** : Wes Davis
Test Package : MOB 2

MARCHETTI COMMERCIAL FUELS
 131 BALLARD ST
 SAUGUS, MA
 US 01906
 Contact: DON PERCY

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: