



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 345G 1FF345GXKMF020827

Component
Pump Drive

Fluid
SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189059	JR0188741	JR0170885
Sample Date		Client Info		03 Jan 2024	20 Sep 2023	28 Jun 2023
Machine Age	hrs	Client Info		3530	2994	2493
Oil Age	hrs	Client Info		536	2478	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		11	20	15
Iron	ppm	ASTM D5185m	>151	23	57	4
Chromium	ppm	ASTM D5185m	>11	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>21	4	5	2
Lead	ppm	ASTM D5185m	>51	0	<1	0
Copper	ppm	ASTM D5185m	>51	0	2	<1
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	11	9	8
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>57	<1	5	<1
Boron	ppm	ASTM D5185m		256	287	305
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		226	221	228
Manganese	ppm	ASTM D5185m		0	2	<1
Magnesium	ppm	ASTM D5185m		784	662	713
Calcium	ppm	ASTM D5185m		1336	1707	1328
Phosphorus	ppm	ASTM D5185m		886	906	861
Zinc	ppm	ASTM D5185m		1015	973	993
Sulfur	ppm	ASTM D5185m		3816	4008	2997
Visc @ 40°C	cSt	ASTM D445	115	115	70.4	111

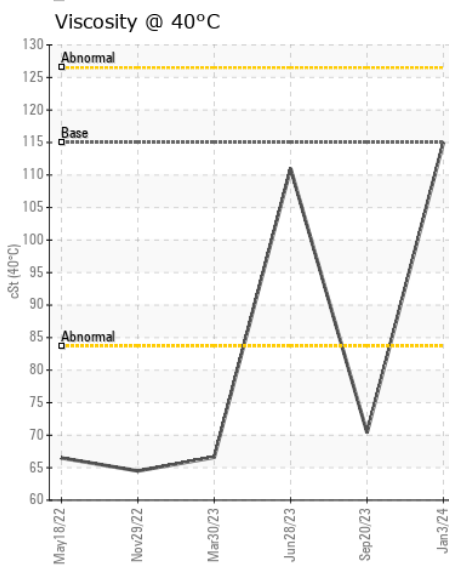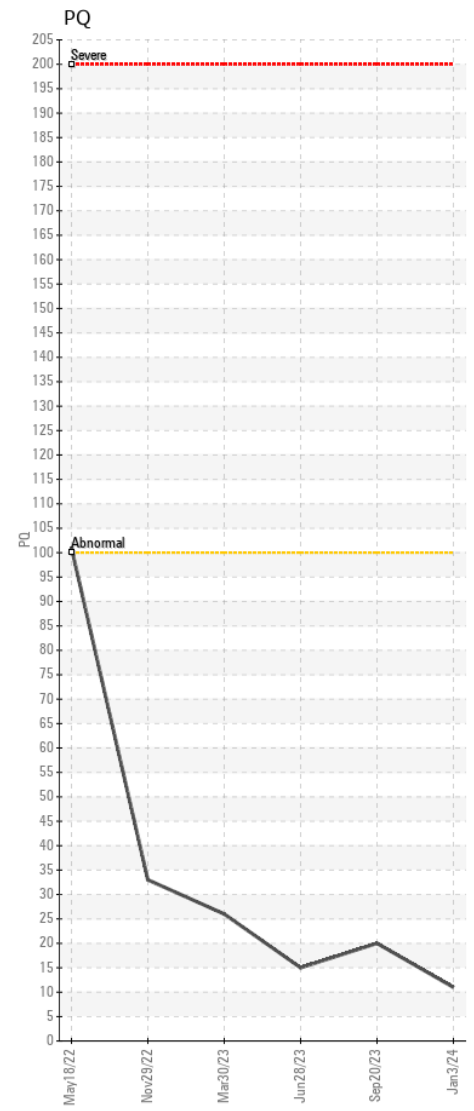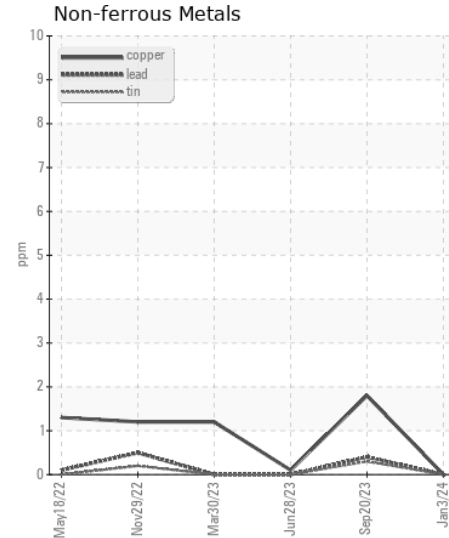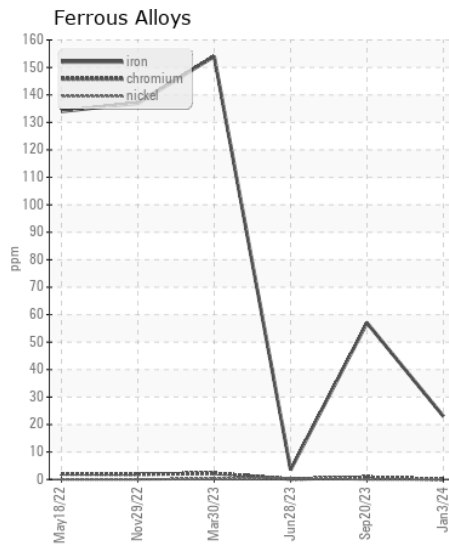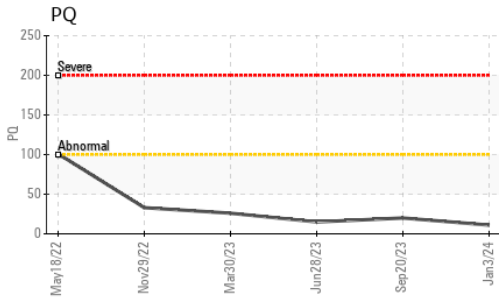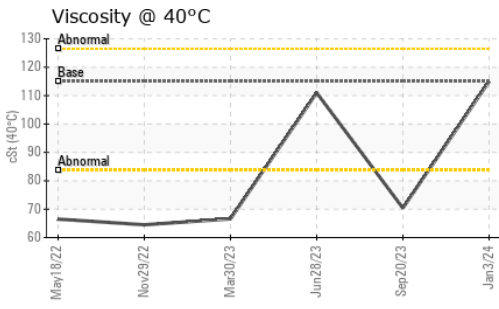

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189059 **Received** : 08 Jan 2024
Lab Number : 06054216 **Diagnosed** : 09 Jan 2024
Unique Number : 10820165 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198