



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**MACK GU713 V96**  
Component  
**Rear Differential**  
Fluid  
**GEAR OIL SAE 85W140 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0178501</b>	JR0144776	JR0144779
Sample Date		Client Info		<b>21 Dec 2023</b>	24 Oct 2023	24 Aug 2023
Machine Age	hrs	Client Info		<b>16959</b>	0	1749
Oil Age	hrs	Client Info		<b>2283</b>	1991	1749
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1100	<b>29</b>	24	26
Iron	ppm	ASTM D5185m	>1200	<b>96</b>	92	90
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>20	<b>2</b>	3	3
Titanium	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	<b>21</b>	22	20
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	1
Boron	ppm	ASTM D5185m	400	<b>255</b>	265	312
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	0	3
Calcium	ppm	ASTM D5185m	150	<b>0</b>	66	3
Phosphorus	ppm	ASTM D5185m	1650	<b>1218</b>	1178	1120
Zinc	ppm	ASTM D5185m	125	<b>0</b>	13	2
Sulfur	ppm	ASTM D5185m	22500	<b>22375</b>	20005	24507
Visc @ 40°C	cSt	ASTM D445	368	<b>142</b>	142	143

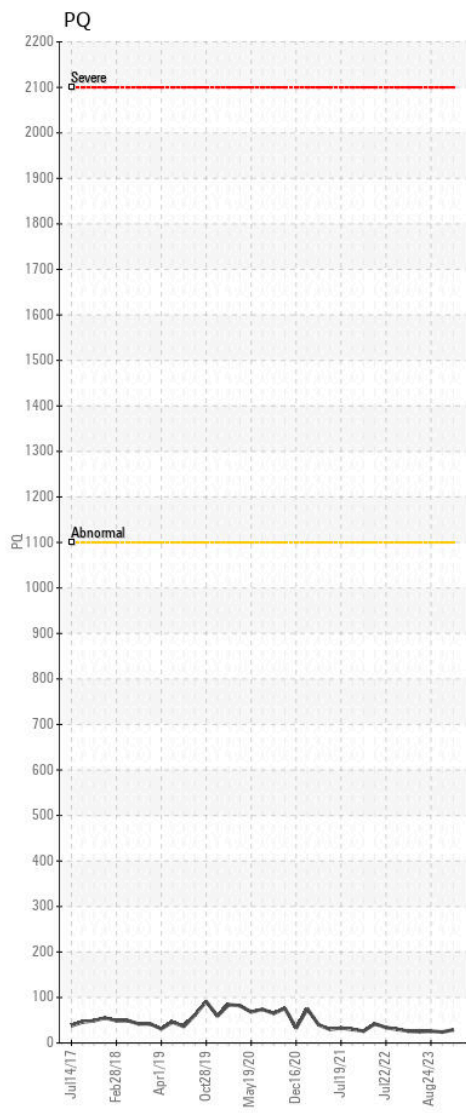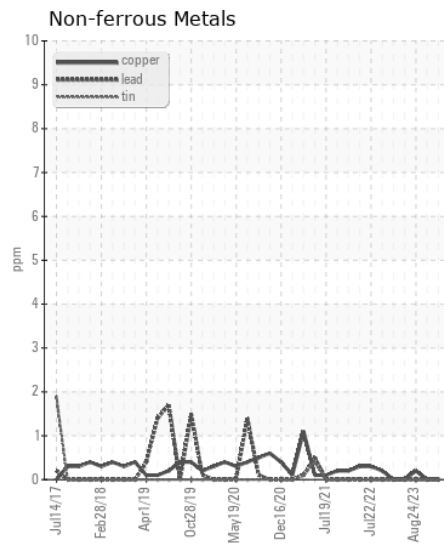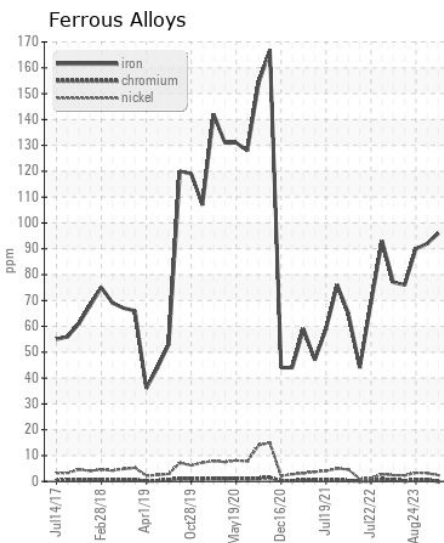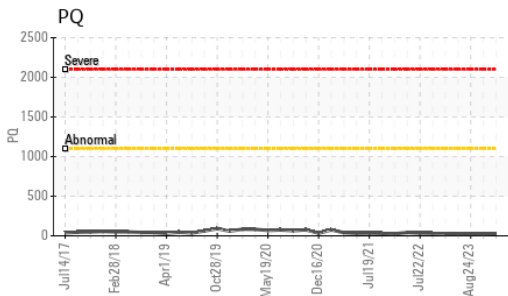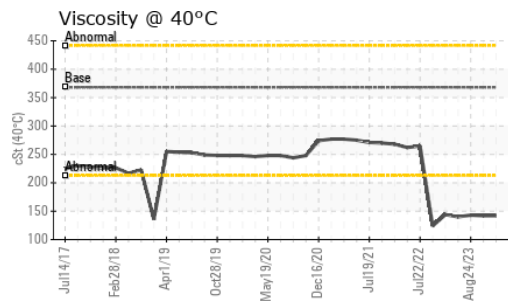

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0178501 **Received** : 08 Jan 2024  
**Lab Number** : 06054223 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10820172 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**MATTHEWS CONSTRUCTION**  
 127 GRAYSON RD  
 ROCK HILL, SC  
 US 29732  
 Contact: Tad Clinton  
 tclinton@matthewsconstructionco.com  
 T: (803)207-5607  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)