



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 750 E229
 Component
Right Inner Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0192602	JR0161530	JR0155354
Sample Date		Client Info		11 Dec 2023	11 Apr 2023	10 Apr 2023
Machine Age	hrs	Client Info		5787	5787	5787
Oil Age	hrs	Client Info		856	256	856
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		62	24	184
Iron	ppm	ASTM D5185m	>500	90	88	297
Chromium	ppm	ASTM D5185m	>10	0	<1	2
Nickel	ppm	ASTM D5185m	>10	0	0	1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	10
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	0	2	67
Potassium	ppm	ASTM D5185m	>20	<1	0	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	0
Boron	ppm	ASTM D5185m		84	111	47
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	1	2
Magnesium	ppm	ASTM D5185m		2	0	9
Calcium	ppm	ASTM D5185m		55	73	199
Phosphorus	ppm	ASTM D5185m		554	632	540
Zinc	ppm	ASTM D5185m		11	0	119
Sulfur	ppm	ASTM D5185m		19428	25056	17104
Visc @ 40°C	cSt	ASTM D445		138	138	132

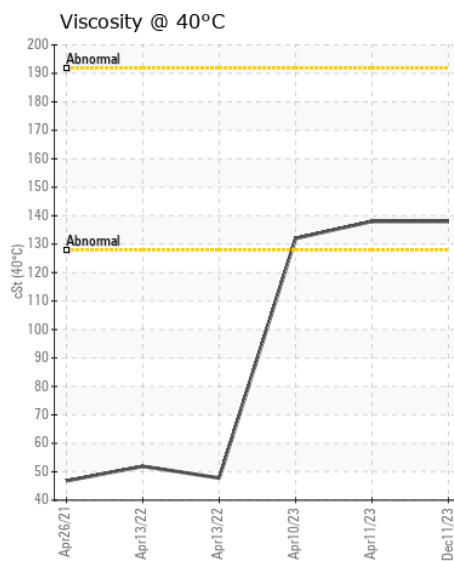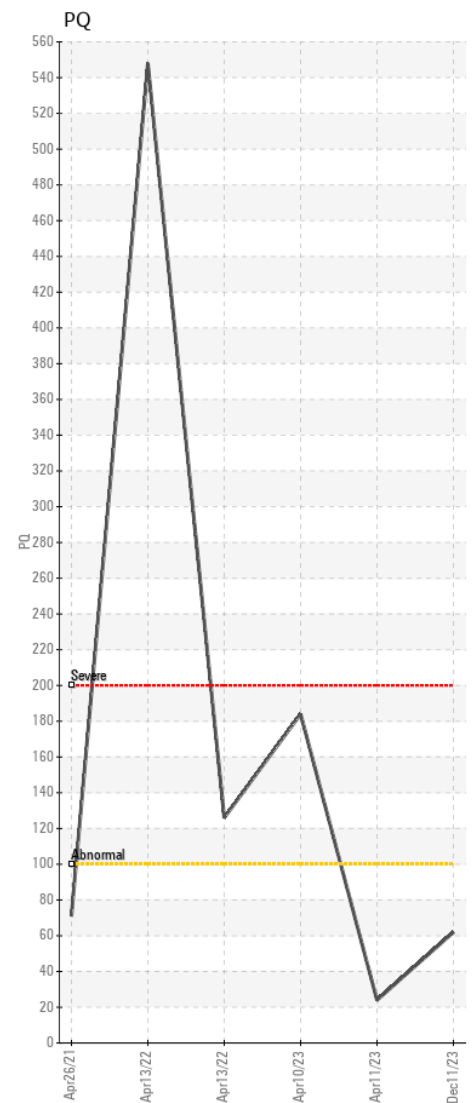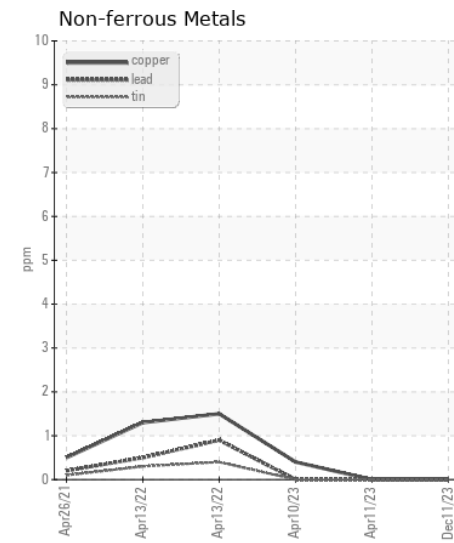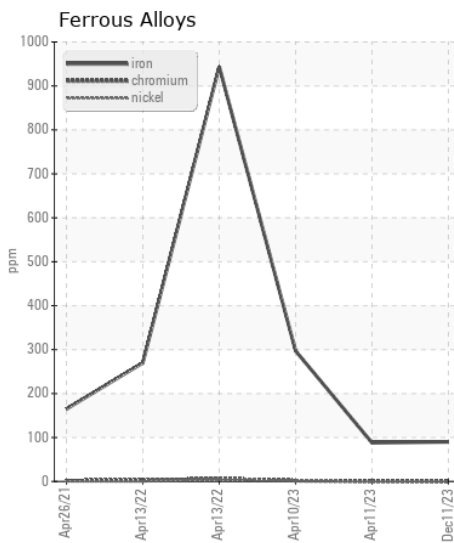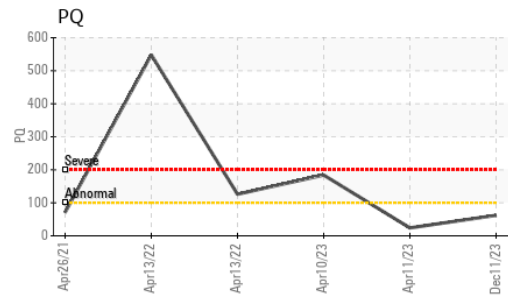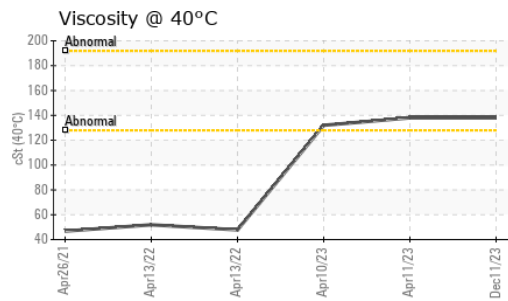

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192602 **Recieved** : 08 Jan 2024
Lab Number : 06054228 **Diagnosed** : 09 Jan 2024
Unique Number : 10820177 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

MATTHEWS CONSTRUCTION
 127 GRAYSON RD
 ROCK HILL, SC
 US 29732
 Contact: Tad Clinton
 tclinton@matthewsconstructionco.com
 T: (803)207-5607
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)