



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W46471]**  
 Machine Id  
**KLEEMANN MR130Zi EVO2 K0780276**  
 Component  
**Right Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W46471 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197874</b>	JR0186558	JR0175223
Sample Date		Client Info		<b>04 Jan 2024</b>	09 Nov 2023	03 Jul 2023
Machine Age	hrs	Client Info		<b>1474</b>	990	2914
Oil Age	hrs	Client Info		<b>484</b>	990	2914
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>48</b>	82	52
Iron	ppm	ASTM D5185m	>500	<b>40</b>	125	61
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	4	3
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>1</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>7</b>	1	23
Boron	ppm	ASTM D5185m	400	<b>11</b>	0	24
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	8	3
Magnesium	ppm	ASTM D5185m	12	<b>&lt;1</b>	<1	1
Calcium	ppm	ASTM D5185m	150	<b>39</b>	29	42
Phosphorus	ppm	ASTM D5185m	1650	<b>462</b>	207	461
Zinc	ppm	ASTM D5185m	125	<b>15</b>	0	10
Sulfur	ppm	ASTM D5185m	22500	<b>15406</b>	19772	6844
Visc @ 40°C	cSt	ASTM D445	143	<b>128</b>	125	145

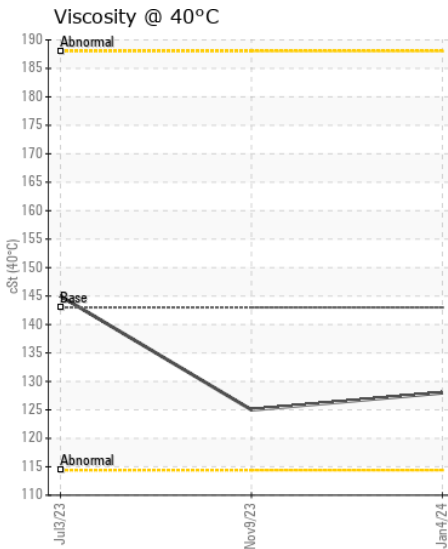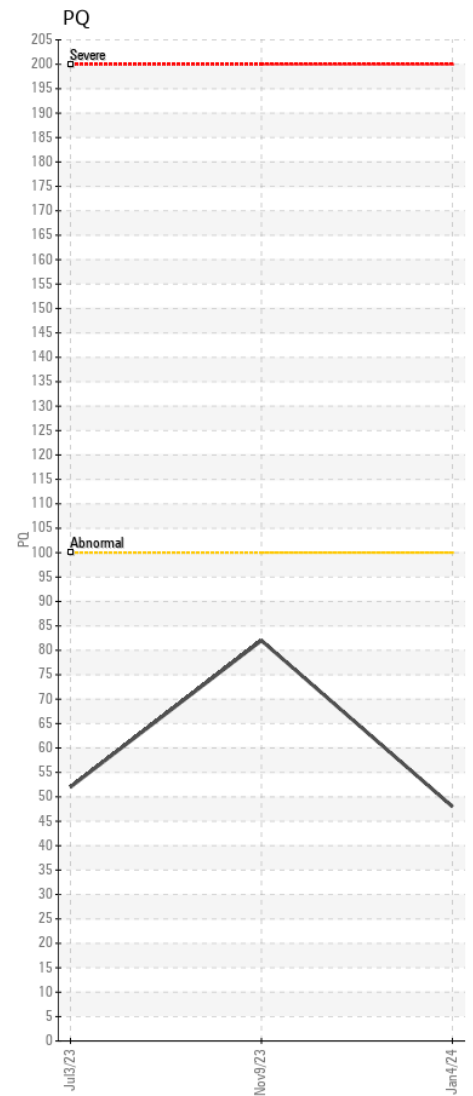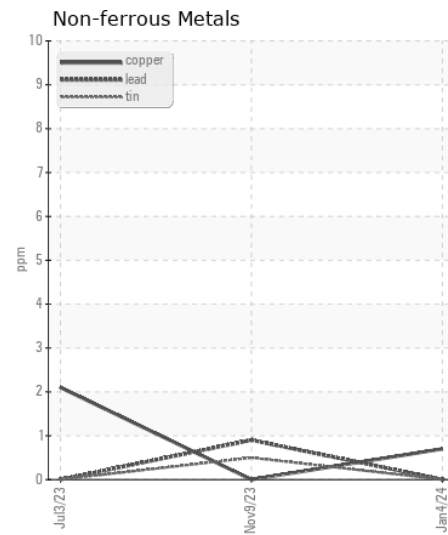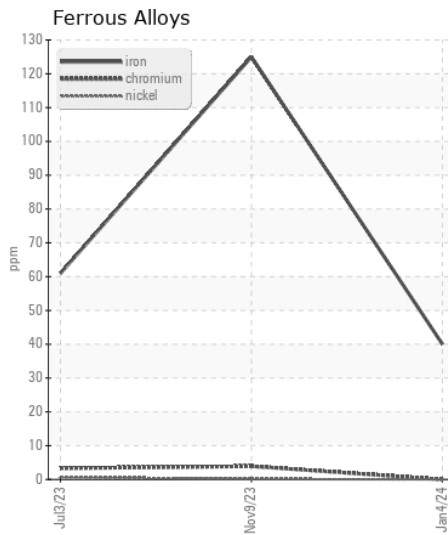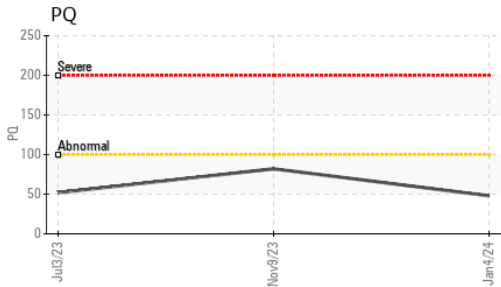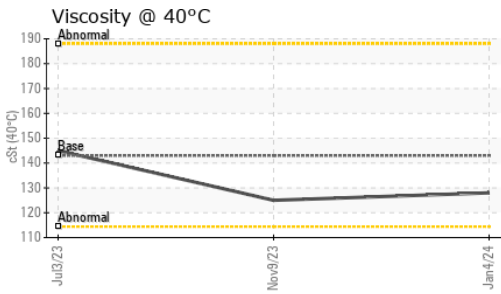

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0197874 **Received** : 08 Jan 2024  
**Lab Number** : 06054241 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10820190 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260  
 F: (919)779-5432