



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1FF135GXCLF502341
 Component
Swing Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199478	JR0074667	---
Sample Date		Client Info		04 Jan 2024	04 Apr 2022	---
Machine Age	hrs	Client Info		1949	961	---
Oil Age	hrs	Client Info		988	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		44	58	---
Iron	ppm	ASTM D5185m	>151	138	110	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>21	0	1	---
Lead	ppm	ASTM D5185m	>51	0	0	---
Copper	ppm	ASTM D5185m	>51	0	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	18	18	---
Potassium	ppm	ASTM D5185m	>20	2	1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	0	---
Boron	ppm	ASTM D5185m		67	73	---
Barium	ppm	ASTM D5185m		17	11	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		6	11	---
Phosphorus	ppm	ASTM D5185m		518	530	---
Zinc	ppm	ASTM D5185m		13	13	---
Sulfur	ppm	ASTM D5185m		15823	12602	---
Visc @ 40°C	cSt	ASTM D445		184	185.3	---

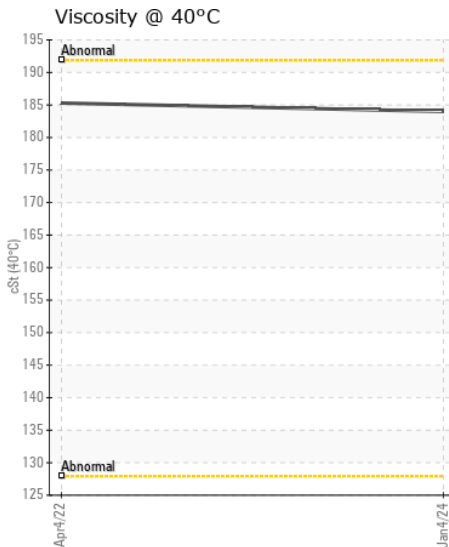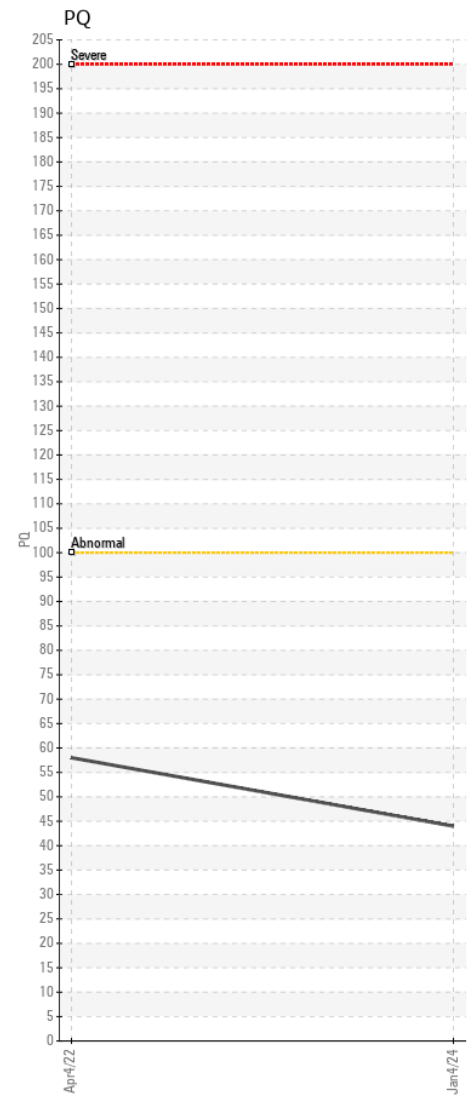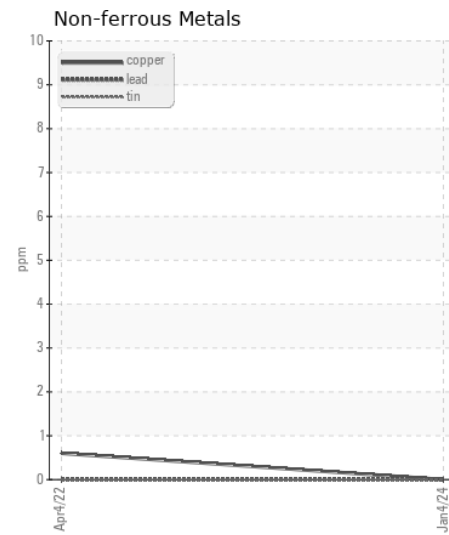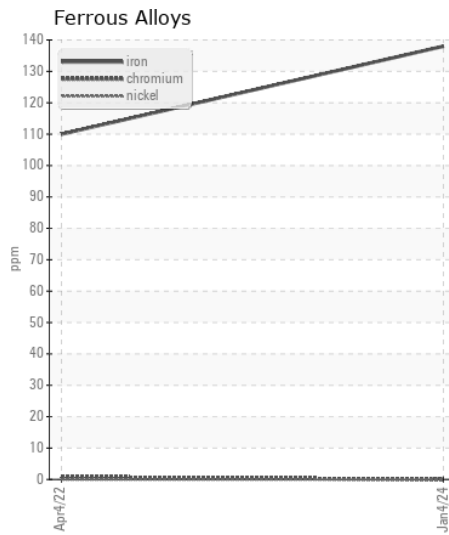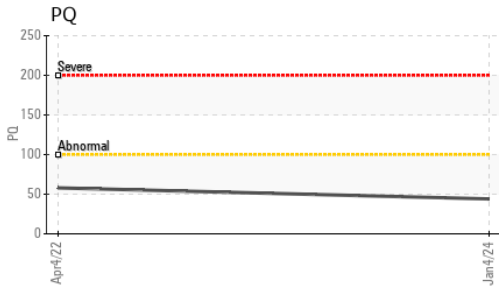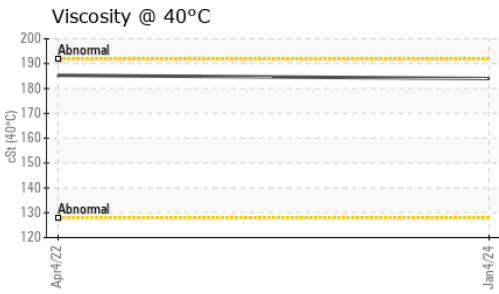

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199478 **Received** : 08 Jan 2024
Lab Number : 06054258 **Diagnosed** : 09 Jan 2024
Unique Number : 10820207 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALLSITE CONTRACTING
 11128 INDUSTRIAL RD
 MANASSAS, VA
 US 20109
 Contact: DAVE PARKER
 dave.parker@allsiteco.com
 T: (703)361-2499
 F: (703)361-6169