



**James River
Equipment**

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 7760 1N07760XJB0035205

Component
Rear Left Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201861	---	---
Sample Date		Client Info		07 Jan 2024	---	---
Machine Age	hrs	Client Info		2250	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	52	---	---
Iron	ppm	ASTM D5185m	>750	222	---	---
Chromium	ppm	ASTM D5185m	>9	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	1	---	---
Lead	ppm	ASTM D5185m	>15	3	---	---
Copper	ppm	ASTM D5185m	>40	10	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Elemental level of silicon (Si) above normal indicating ingress of seal material.

Silicon	ppm	ASTM D5185m	>75	▲ 221	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	4	---	---
Boron	ppm	ASTM D5185m	400	24	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	6	---	---
Calcium	ppm	ASTM D5185m	150	152	---	---
Phosphorus	ppm	ASTM D5185m	1650	406	---	---
Zinc	ppm	ASTM D5185m	125	61	---	---
Sulfur	ppm	ASTM D5185m	22500	19338	---	---
Visc @ 40°C	cSt	ASTM D445	143	138	---	---

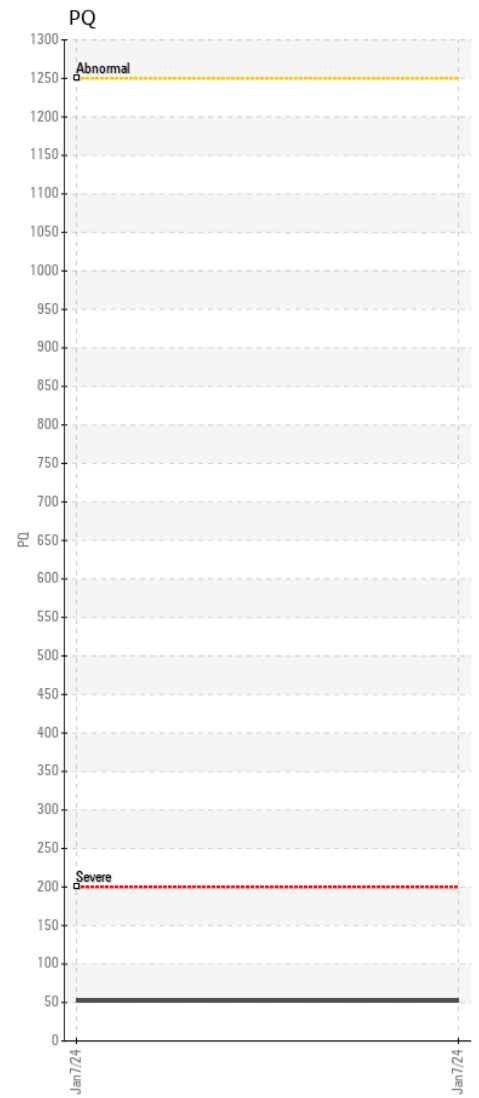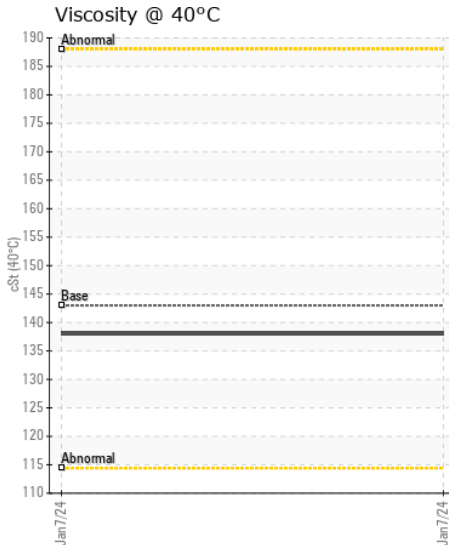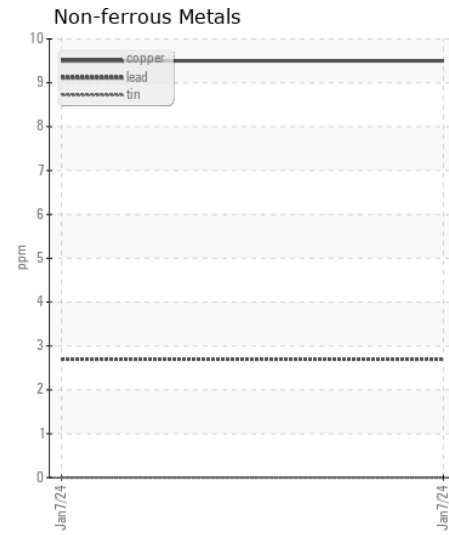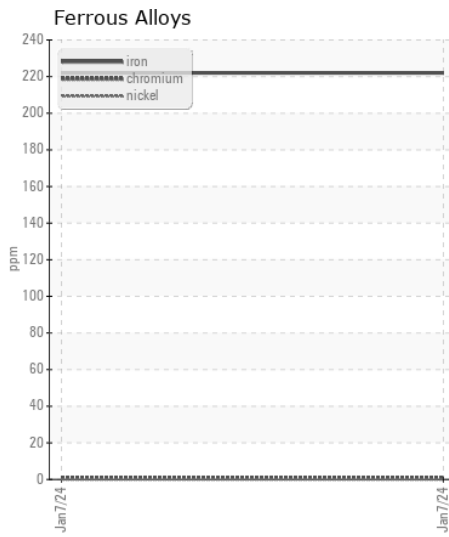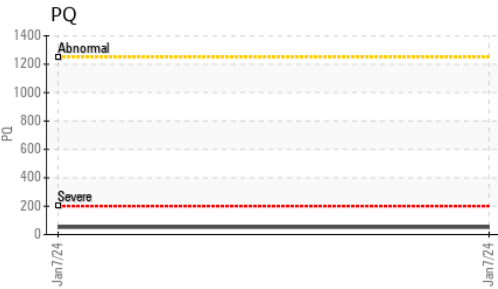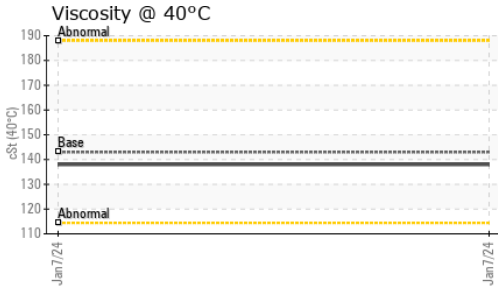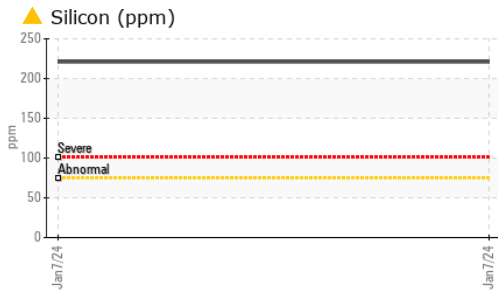

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0201861 **Received** : 08 Jan 2024
Lab Number : 06054265 **Diagnosed** : 09 Jan 2024
Unique Number : 10820214 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WAKEFIELD
 10489 GENERAL MAHONE HWY
 WAKEFIELD, VA
 US 23888
 Contact: BILL ACKER
 backer@jamesriverequipment.com
 T: (757)899-3232
 F: (757)899-6464