



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
[SWA442492 COMM CONTR]
 Machine Id
LINKBELT RTC-8065 II J9L2-7074
 Component
Front Right Final Drive
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | VCP441844 | --- | --- |
| Sample Date | | Client Info | | 03 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 1041 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >500 | 30 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Lead | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 16 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | 7 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 11 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|-------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 0 | --- | --- |
| Boron | ppm | ASTM D5185m | 400 | 273 | --- | --- |
| Barium | ppm | ASTM D5185m | 200 | 10 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | <1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 12 | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | 150 | 3 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 1376 | --- | --- |
| Zinc | ppm | ASTM D5185m | 125 | 13 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 28178 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 109 | 102 | --- | --- |

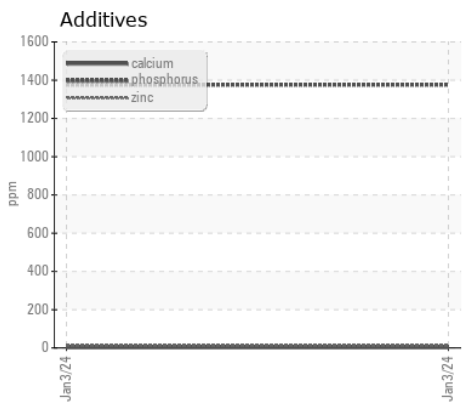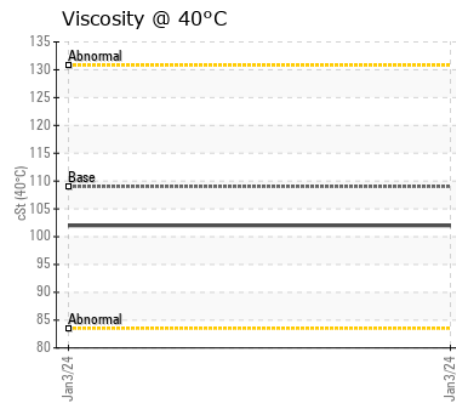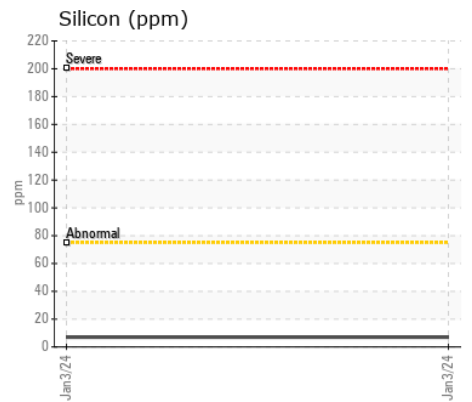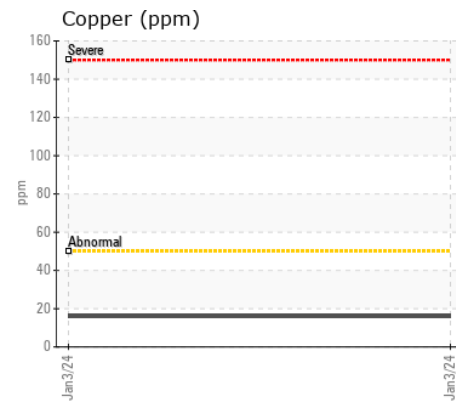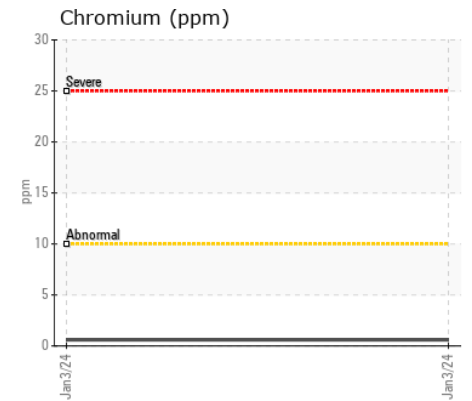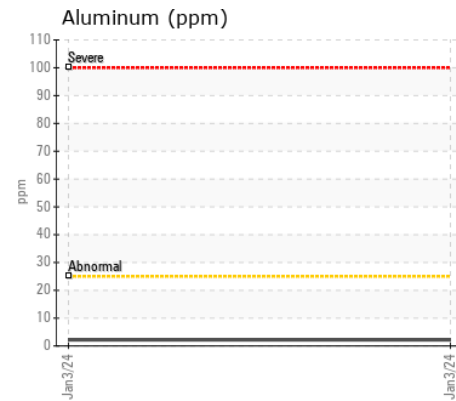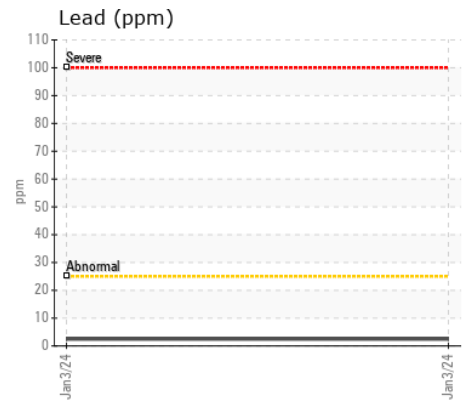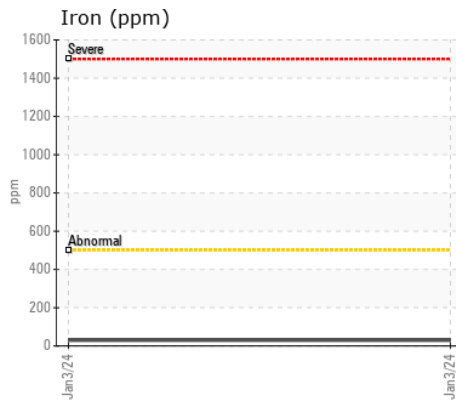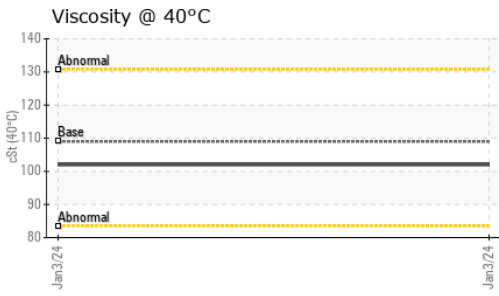

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP441844 **Received** : 08 Jan 2024
Lab Number : 06054361 **Diagnosed** : 09 Jan 2024
Unique Number : 10820310 **Diagnostician** : Wes Davis
Test Package : MOB 1

ALTA EQUIPMENT CO - ORLAND PARK
 5000 INDUSTRIAL HWY
 GARY, IN
 US 46406
 Contact: DAVE ENG
 DAVE.ENG@ALTG.COM
 T: (312)350-2560
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)