



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SW1028121 ODDONETTO]
Machine Id
VOLVO A40G 340471
Component
Drop Box
Fluid
GEAR OIL SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP430503	VCP316314	---
Sample Date		Client Info		29 Dec 2023	15 Jul 2021	---
Machine Age	hrs	Client Info		8301	7149	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	70	51	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	4	5	---
Lead	ppm	ASTM D5185m	>30	<1	0	---
Copper	ppm	ASTM D5185m	>30	2	<1	---
Tin	ppm	ASTM D5185m	>20	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	5	4	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	5	---
Boron	ppm	ASTM D5185m	400	174	295	---
Barium	ppm	ASTM D5185m	200	7	0	---
Molybdenum	ppm	ASTM D5185m	12	2	2	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m	12	4	5	---
Calcium	ppm	ASTM D5185m	150	48	57	---
Phosphorus	ppm	ASTM D5185m	1650	1564	2147	---
Zinc	ppm	ASTM D5185m	125	25	42	---
Sulfur	ppm	ASTM D5185m	22500	23364	23995	---
Visc @ 40°C	cSt	ASTM D445	48	44.1	54.7	---

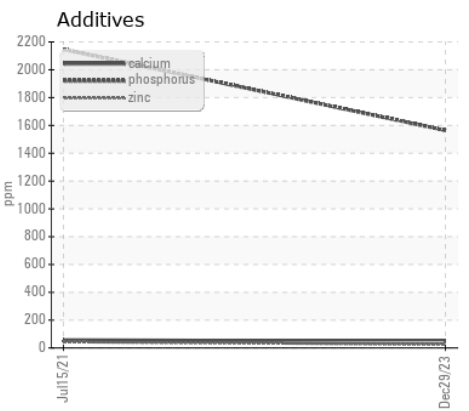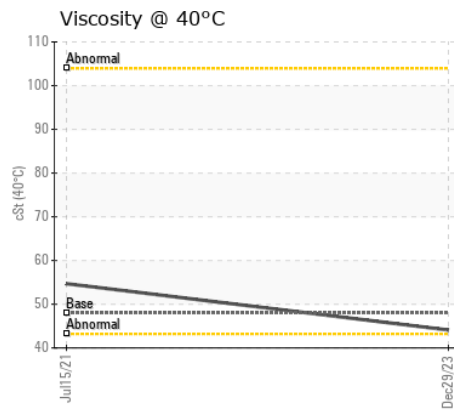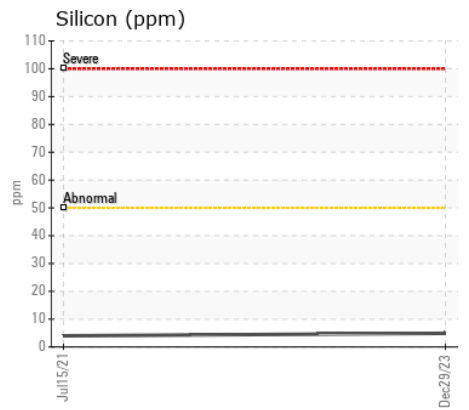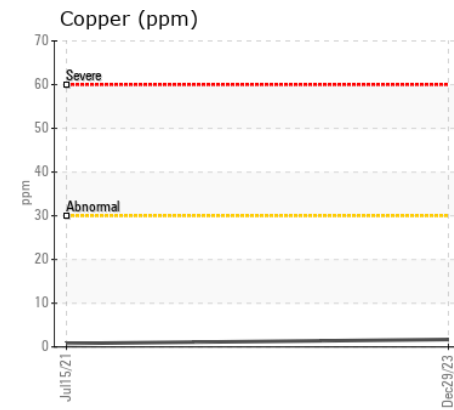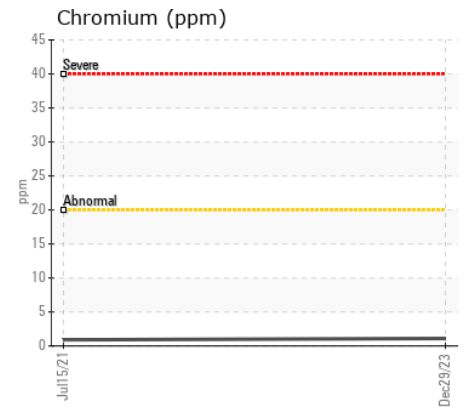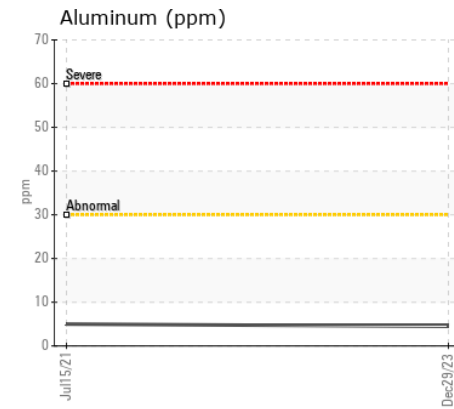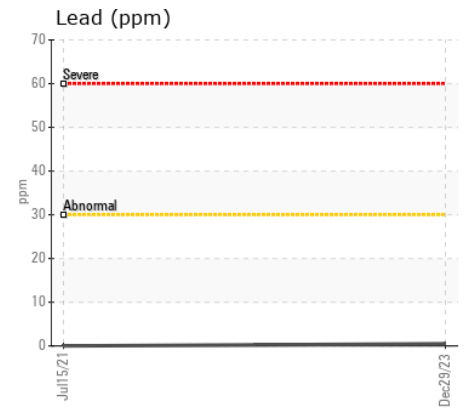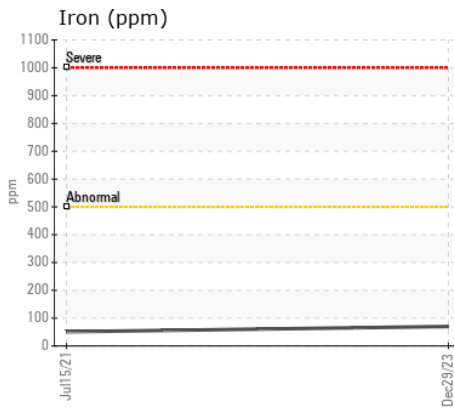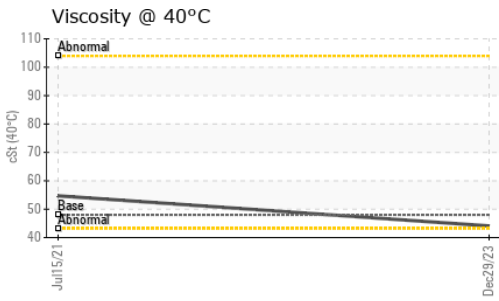

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP430503 **Received** : 08 Jan 2024
Lab Number : 06054370 **Diagnosed** : 09 Jan 2024
Unique Number : 10820319 **Diagnostician** : Wes Davis
Test Package : MOB 1

ARNOLD MACHINERY COMPANY
 4323 EAST WINSLOW AVENUE
 PHOENIX, AZ
 US 85040
 Contact: RANDY PRZEKURAT
 randyp@arnoldmachinery.com
 T:
 F: (602)414-1904

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)