



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH60M 119208-1217
Component
Front Left Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0267394	LH0257444	LH0200269
Sample Date		Client Info		04 Jan 2024	05 Jul 2023	30 Nov 2022
Machine Age	hrs	Client Info		4478	3275	1763
Oil Age	hrs	Client Info		0	700	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	140	16	36
Chromium	ppm	ASTM D5185m	>4	2	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m	>4	<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	1	<1
Lead	ppm	ASTM D5185m	>4	<1	0	0
Copper	ppm	ASTM D5185m	>60	4	4	4
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	MODER	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	<1	1
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	2
Boron	ppm	ASTM D5185m	0	158	174	177
Barium	ppm	ASTM D5185m	0	73	24	37
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m	0	2	<1	<1
Magnesium	ppm	ASTM D5185m	<1	<1	0	<1
Calcium	ppm	ASTM D5185m	<1	11	1	7
Phosphorus	ppm	ASTM D5185m	2143	1069	1110	1125
Zinc	ppm	ASTM D5185m	<1	18	0	10
Sulfur	ppm	ASTM D5185m	23468	28500	31061	30469
Visc @ 40°C	cSt	ASTM D445	170	150	148	149

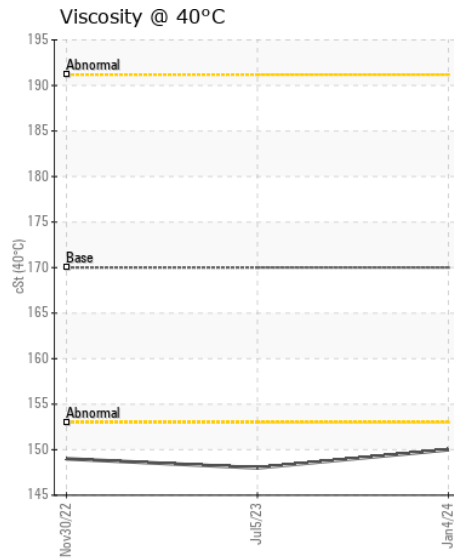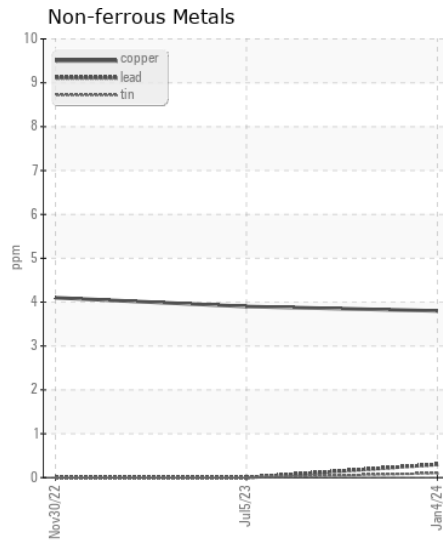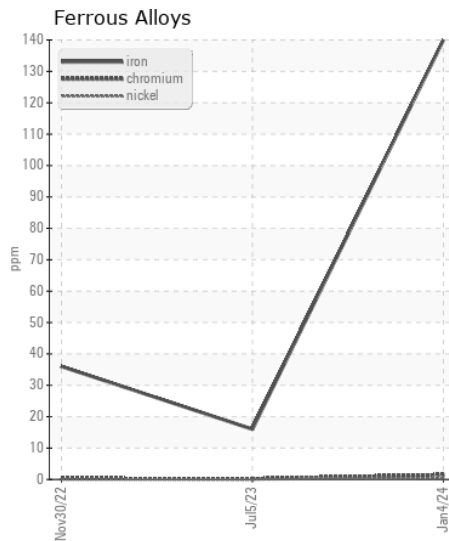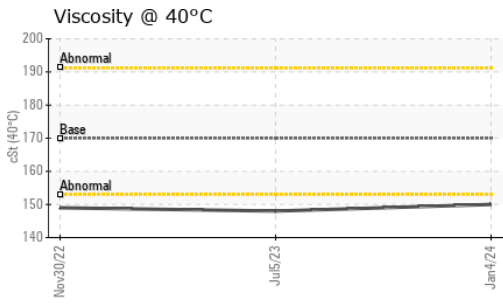

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0267394 **Received** : 08 Jan 2024
Lab Number : 06054383 **Diagnosed** : 10 Jan 2024
Unique Number : 10820332 **Diagnostician** : Jonathan Hester
Test Package : CONST

TT & E IRON
 1529 WEST GARNER RD
 GARNER, NC
 US 27529
 Contact: MICHAEL STANCIL
 culaterprowler@aol.com
 T: (919)524-4326
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)