



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**AMR-12th Street**  
 Machine Id  
**484145 116360**

Component  
**Rear Differential**  
 Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

## WEAR

All component wear rates are normal.

## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0020066</b>	DJJ0018347	DJJ0019181
Sample Date		Client Info		<b>02 Jan 2024</b>	21 Sep 2023	01 Jun 2023
Machine Age	hrs	Client Info		<b>9493</b>	9001	8489
Oil Age	hrs	Client Info		<b>0</b>	0	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	<b>3</b>	4	<1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>2</b>	5	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	<b>1</b>	0	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m		<b>0</b>	5	0
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	<1	<b>0</b>	5	0
Calcium	ppm	ASTM D5185m	<1	<b>7</b>	18	0
Phosphorus	ppm	ASTM D5185m	2143	<b>2407</b>	2363	2259
Zinc	ppm	ASTM D5185m	<1	<b>0</b>	8	<1
Sulfur	ppm	ASTM D5185m	23468	<b>36929</b>	29576	26895
Visc @ 40°C	cSt	ASTM D445	170	<b>192</b>	182	197

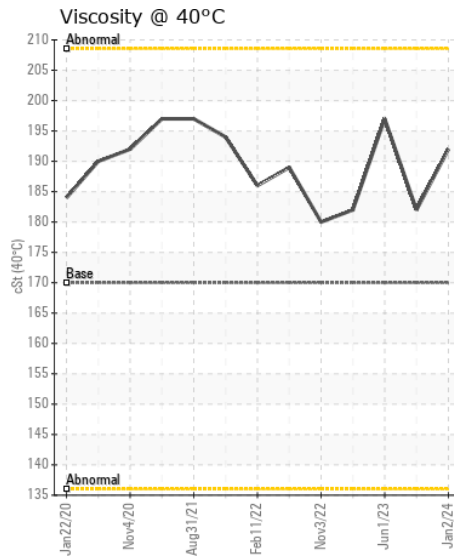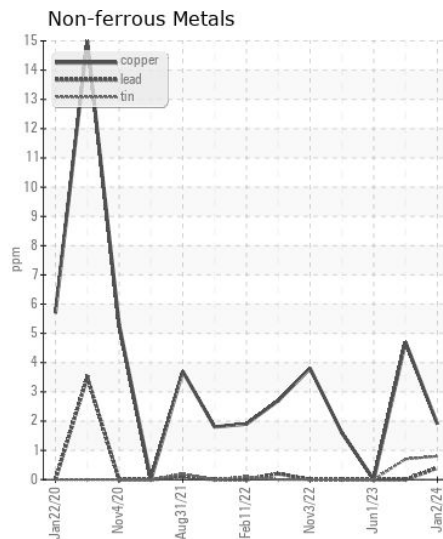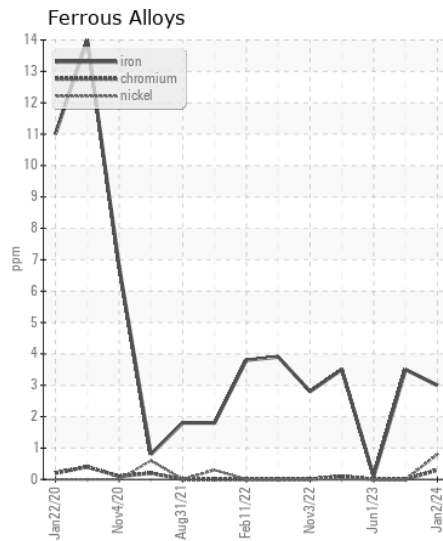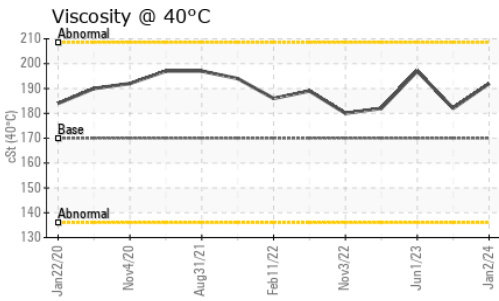

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0020066  
**Lab Number** : 06054407  
**Unique Number** : 10820356  
**Test Package** : CONST

**ADVANTAGE METALS RECYCLING - 12 STREET**  
 1153 S. 12TH STREET  
 KANSAS CITY, KS  
 US 66105  
 Contact: JOHN PEEK  
 john.peek@advantagerecycling.com  
 T: (660)424-9134  
 F: (913)621-2766

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)