



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / RIVER VALLEY BACKBONE
Machine Id
WL135
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0069886	PCA0084859	PCA0084834
Sample Date		Client Info		28 Dec 2023	25 Oct 2023	12 Aug 2023
Machine Age	hrs	Client Info		52934	52934	52602
Oil Age	hrs	Client Info		900	900	900
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	13	15	26
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	3
Lead	ppm	ASTM D5185m	>45	<1	0	<1
Copper	ppm	ASTM D5185m	>225	2	2	3
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	10	11	17
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m	2	0	2	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	<1	0
Manganese	ppm	ASTM D5185m	9	<1	0	<1
Magnesium	ppm	ASTM D5185m	1	16	14	16
Calcium	ppm	ASTM D5185m	3131	3029	2495	2897
Phosphorus	ppm	ASTM D5185m	1194	914	689	796
Zinc	ppm	ASTM D5185m	1281	1100	954	979
Sulfur	ppm	ASTM D5185m	3811	4279	2930	3666
Visc @ 40°C	cSt	ASTM D445	88.5	83.2	80.7	81.7

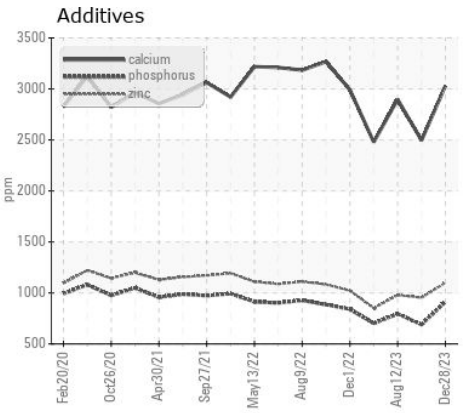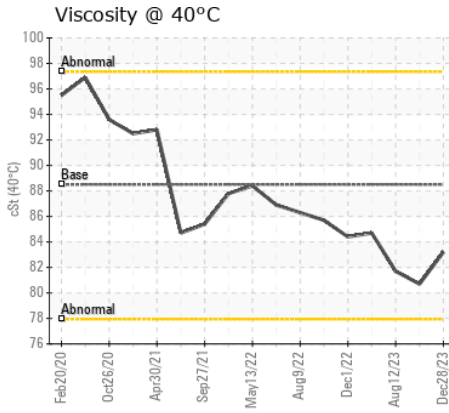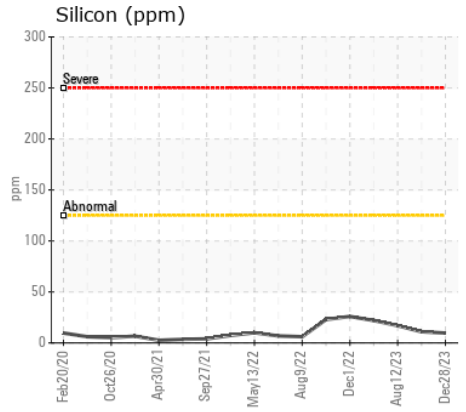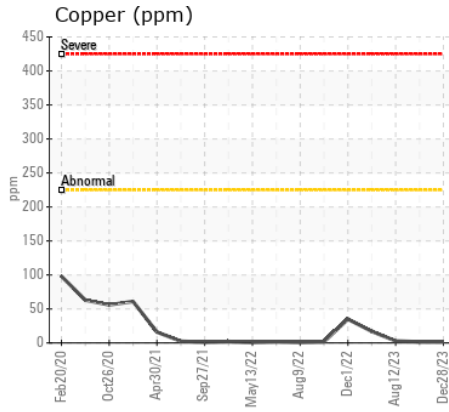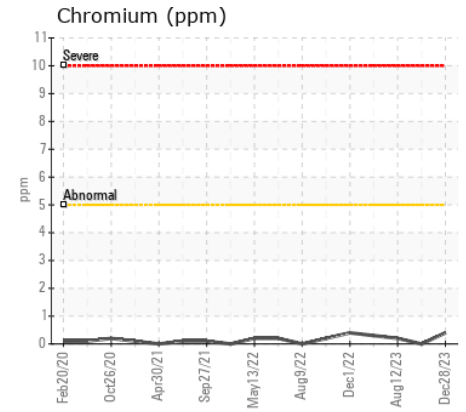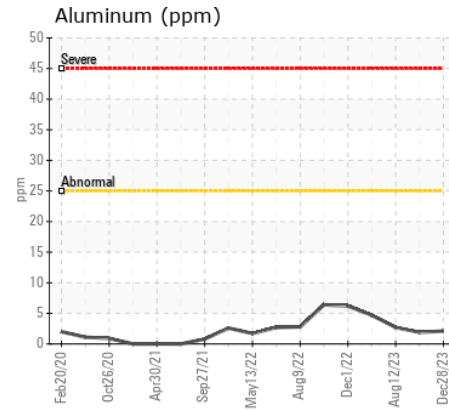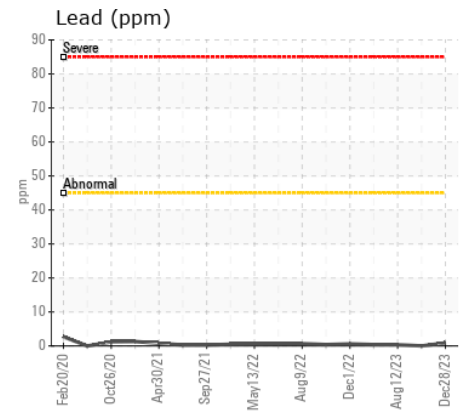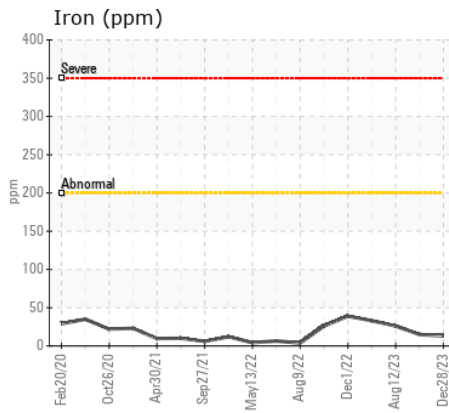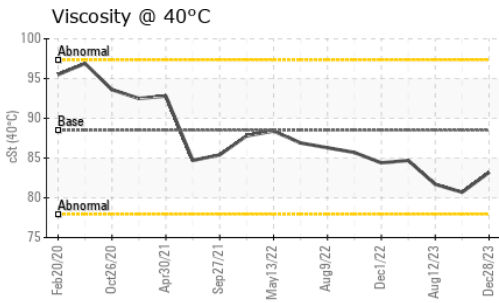

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0069886 **Received** : 08 Jan 2024
Lab Number : 06054443 **Diagnosed** : 09 Jan 2024
Unique Number : 10820392 **Diagnostician** : Wes Davis
Test Package : MOB 1

Kemp Quarries - River Valley - Backbone
 5600 S Hwy 253
 Huntington, AR
 US 72940
 Contact:
 backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: